
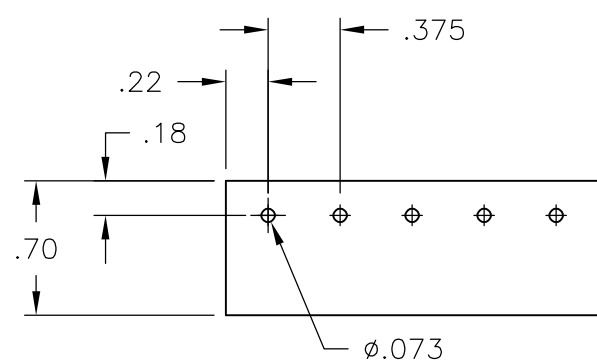
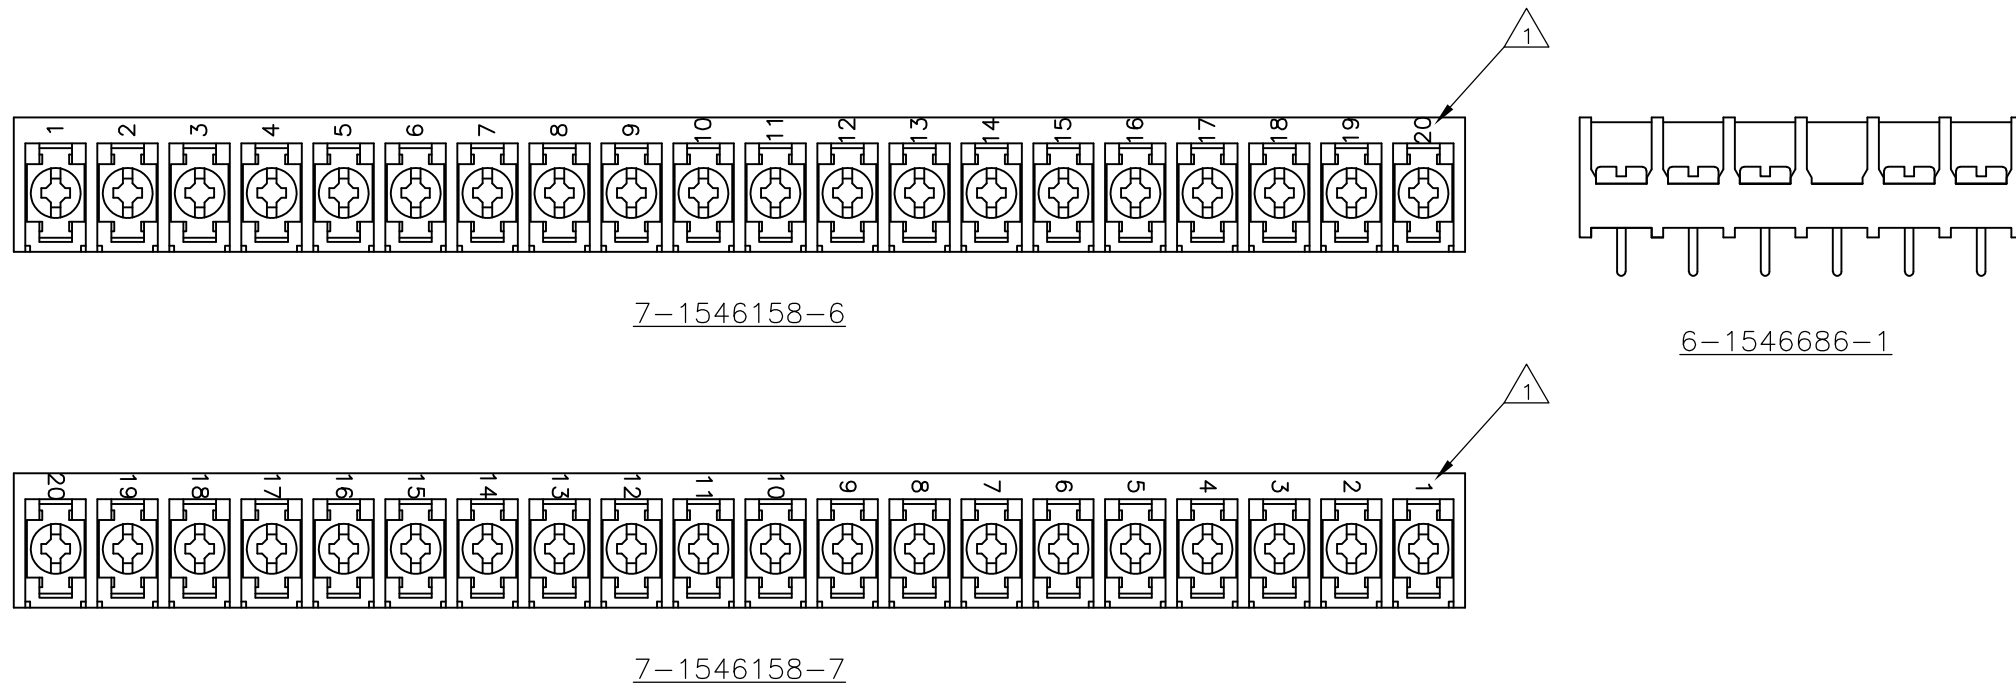
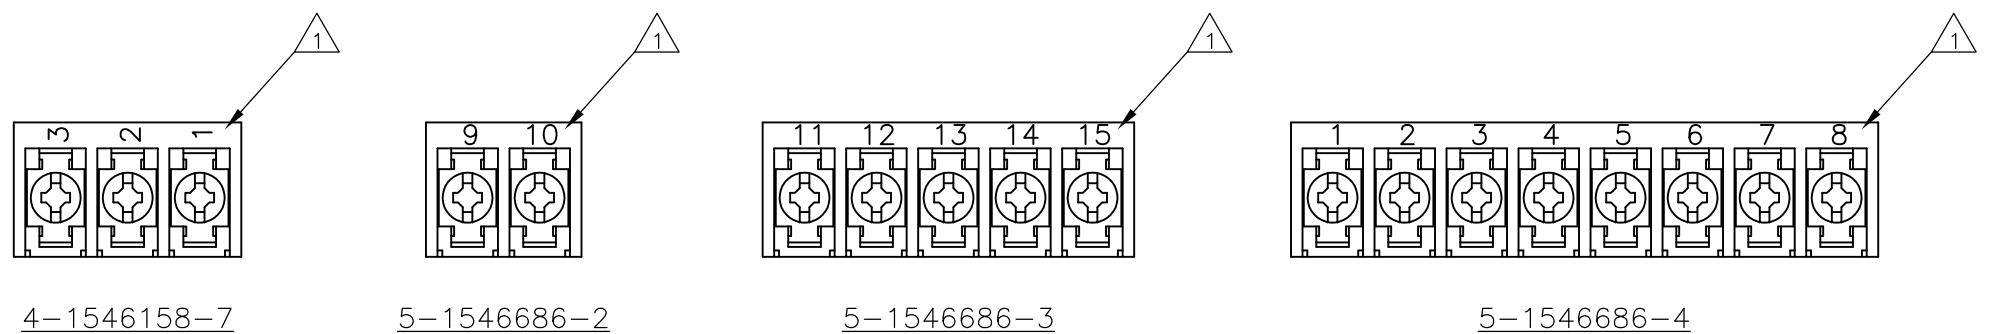


MATERIAL:
HOUSING: THERMOPLASTIC, UL94V-0 BLACK.
TERMINALS: BRIGHT TIN PLATED, COPPER ALLOY.
SCREWS: 6-32, STEEL, ZINC PLATED WITH CLEAR CHROMATE.
UNLESS OTHERWISE NOTED.

ELECTRICAL:
RATED CURRENT UL/CSA:
CLASS C: 25A, 300V.
CLASS D: 5A, 600V.
WIRE RANGE: 12-22 AWG

MECHANICAL:
RECOMMENDED TIGHTENING TORQUE: 7 IN-LBS.
OPERATING TEMP.: 105°C MAX


	MARK WITH WHITE PERMANENT INK.
2	ALL SCREWS TO BE DRIVEN DOWN TO TERMINAL SURFACE.
	STAINLESS STEEL SCREWS.
	NICKEL PLATED BRASS SCREWS.
	PRELIMINARY PART NUMBER.

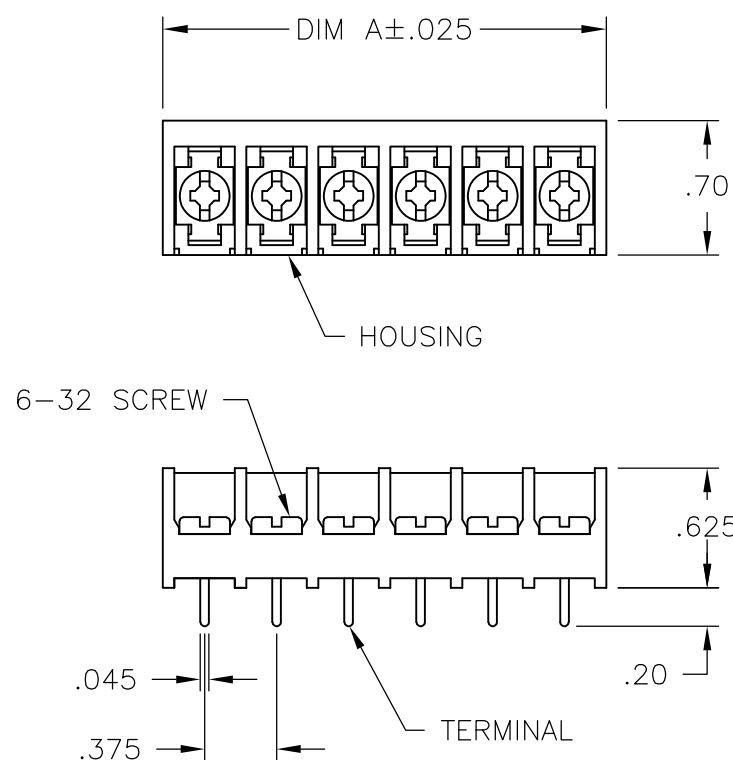

RECOMMENDED PCB LAYOUT

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C4	REVISED PER ECO-11-014078	12JUL11	HMR	CR

	1.311	30	6PCV-30-007	8-1546158-7	
OBSOLETE	11.311	30	6PCV-30-007	1546814-2	
	10.936	29	6PCV-29-007	1546814-1	
	10.561	28	6PCV-28-007	2-1546686-1	
	10.186	27	6PCV-27-007	2-1546686-0	
	9.811	26	6PCV-26-007	8-1546158-4	
	9.436	25	6PCV-25-007	1-1546686-9	
△3	9.061	24	6PCV-24-723	3-1437654-8	
	9.061	24	6PCV-24-007	8-1546158-3	
	8.686	23	6PCV-23-007	1-1546686-8	
	8.311	22	6PCV-22-007	1-1546686-1	
	7.936	21	6PCV-21-007	1-1546686-6	
△3	7.561	20	6PCV-20-720	2-1437654-7	
SEE FIGURE	7.561	20	6PCV-20-1360	7-1546158-7	
SEE FIGURE	7.561	20	6PCV-20-1359	7-1546158-6	
	7.561	20	6PCV-20-007	7-1546158-3	
	7.186	19	6PCV-19-007	1-1546686-5	
△3	6.811	18	6PCV-18-1390	1546262-5	
	6.811	18	6PCV-18-007	1437654-8	
△3	6.436	17	6PCV-17-1206	1437654-1	
	6.436	17	6PCV-17-007	1-1546686-4	
△3	6.061	16	6PCV-16-719	9-1437653-4	
	6.061	16	6PCV-16-007	8-1437653-1	
△3	5.686	15	6PCV-15-993	7-1437653-6	
	5.686	15	6PCV-15-007	7-1437653-5	
△3	5.311	14	6PCV-14-1205	7-1437653-0	
	5.311	14	6PCV-14-007	6-1437653-7	
△3	4.936	13	6PCV-13-1194	6-1437653-5	
	4.936	13	6PCV-13-007	6-1546158-7	
△3	4.561	12	6PCV-12-718	5-1437653-8	
	4.561	12	6PCV-12-007	5-1437653-2	
	4.186	11	6PCV-11-007	1-1546686-3	
△4	3.811	10	6PCV-10-003	6-1546158-1	
△3	3.811	10	6PCV-10-1193	3-1437653-8	
	3.811	10	6PCV-10-007	3-1437653-6	
△5	3.436	9	6PCV-09-003	5-1546686-5	
△3	3.436	9	6PCV-09-1270	2-1437653-8	
	3.436	9	6PCV-09-007	2-1437653-6	
△1	3.061	8	6PCV-08-1397	5-1546686-4	
△3	3.061	8	6PCV-08-717	1-1437653-9	
	3.061	8	6PCV-08-007	1-1437653-4	
	2.686	7	6PCV-07-007	1437653-8	
△3	2.311	6	6PCV-06-716	1437653-1	
	2.311	6	6PCV-06-007	9-1437652-6	
FIGURE 1	△5	2.311	5	6PCV-06-1173	6-1546686-1
	△1	1.936	5	6PCV-05-1396	5-1546686-3
	△3	1.936	5	6PCV-05-1341	8-1437652-6
		1.936	5	6PCV-05-007	5-1546158-1
	△3	1.561	4	6PCV-04-715	7-1437652-5
		1.561	4	6PCV-04-007	6-1437652-8
SEE FIGURE		1.186	3	6PCV-03-1256	4-1546158-7
		1.186	3	6PCV-03-003	1546119-2
		1.186	3	6PCV-03-007	5-1437652-5
	△1	.811	2	6PCV-02-1395	5-1546686-2
	△3	.811	2	6PCV-02-1339	4-1437652-6
		.811	2	6PCV-02-007	4-1437652-0
	DIM A	NO OF POS	CATALOG NUMBER	PART NO	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. SCHLEGEL CHK S. YODER APVD S. YODER PRODUCT SPEC — APPLICATION SPEC — WEIGHT —		23APR03 4/23/04 4/23/04 NAME 6PCV-XX-007 ASSEMBLY SIZE A2 CAGE CODE 00779 DRAWING NO C-4-1437652-0 RESTRICTED TO —		TE Connectivity	
DIMENSIONS: INCHES 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± .01 3 PLC ± .005 4 PLC ± — ANGLES ± 1° FINISH —		SCALE NTS SHEET 1 of 1 REV C4			
MATERIAL —		CUSTOMER DRAWING					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[7-1437653-5](#)