

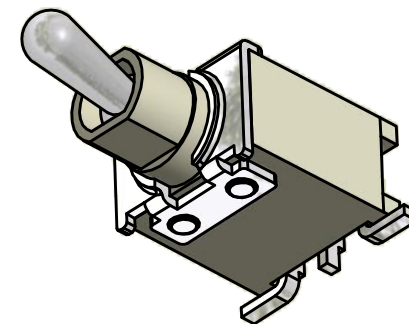
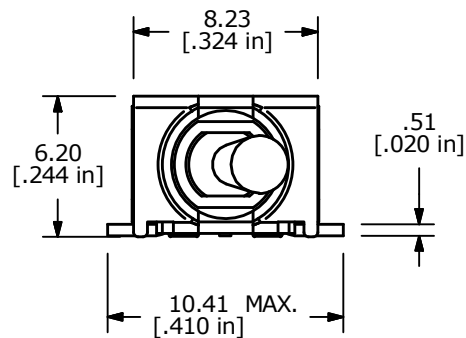



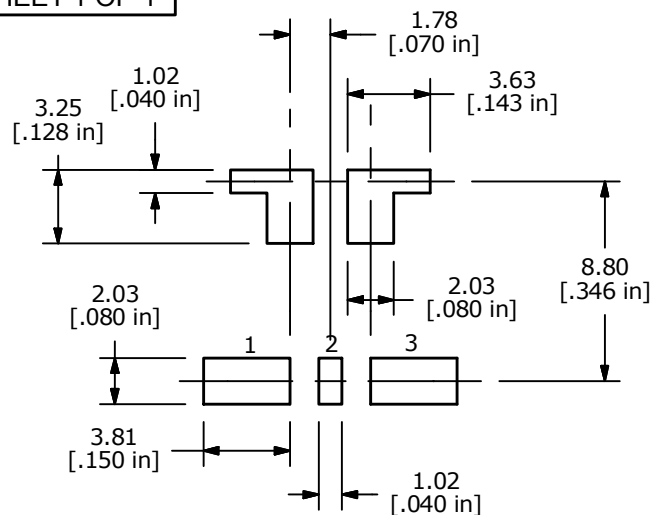


| SWITCH FUNCTION |        |        |
|-----------------|--------|--------|
| POS. 1          | POS. 2 | POS. 3 |
|                 |        |        |
| ON              | NONE   | ON     |
| 2-3             | N/A    | 2-1    |



## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. TERMINAL NUMBERS FOR REF. ONLY
3. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
- ▲ 4. PLATING MATERIAL: GOLD OVER SILVER
5. RATING: 3A@120VAC; 1A@250VAC(RESISTIVE LOAD)
6. CONTACT RESISTANCE: 20 MILLI-OHMS MAX.
7. MECHANICAL LIFE: 30,000 MAKE AND BREAK CYCLES AT FULL LOAD
8. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
9. DIELECTRIC STRENGTH: 1,000 V RMS@SEA LEVEL
10. OPERATING TEMPERATURE: -30°C TO 85°C
11. PACKAGING: 500 PER REEL.
12. ▲ DENOTES CRITICAL PARAMETER.
13. 2011/65/EU (ROHS) COMPLIANT

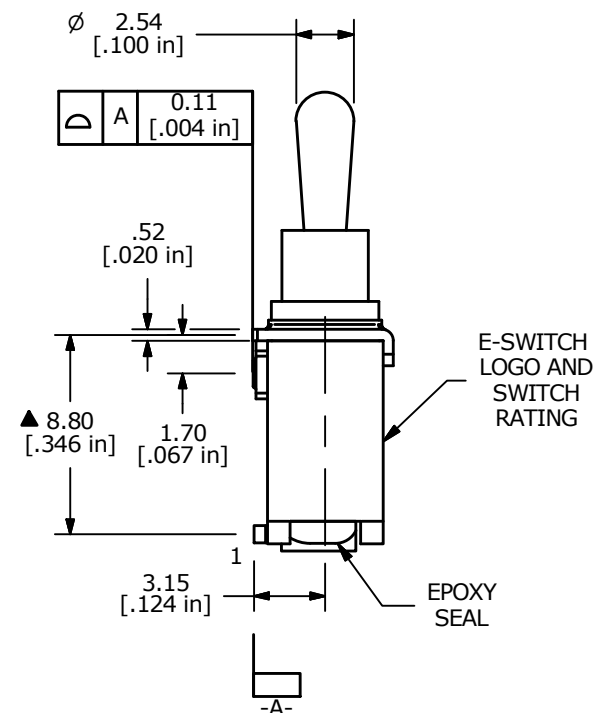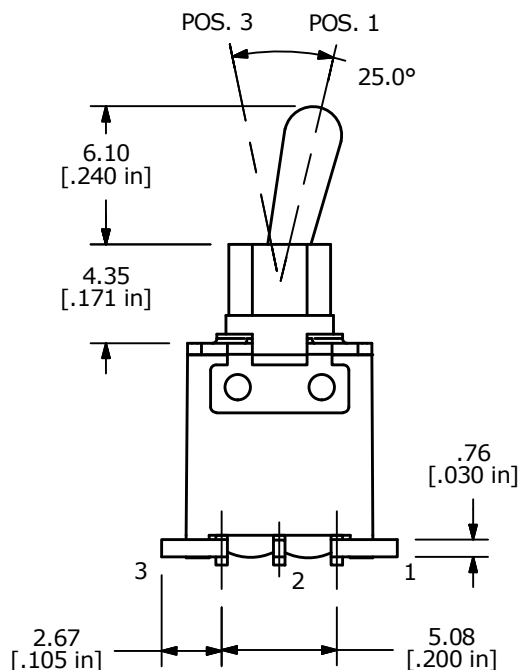

E-SWITCH®

|     |        |                     |         |     |
|-----|--------|---------------------|---------|-----|
| E   | 22359  | REDRAWN AND REVISED | 6/20/16 | MJR |
| D   | 16058  | UPDATE DIMENSIONS   | 5/30/06 | CT  |
| REV | PCR NO | DESCRIPTION         | DATE    | BY  |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 200BWMSP1T2A1SM6RE

SCALE 3:1

DATE 6/29/1999

DR MM

DWG T833017

REV E