

PxxxxSCX Series


Thyristors Solid Protection Device Bidirectional transient voltage suppressors

Features

- For surface mounted applications to optimize board space
- Low profile package
- Bidirectional crowbar protection
- Low leakage current : $I = 5\mu A$ max
- Low on-state voltage
- Low Capacitance
- Response Time is $< 1\mu s$
- YD/T 950 IEC 61000-4-5
- YD/T 993 ITU K.20/21
- YD/T 1082 TIA-968-A
- GR 1089 Intra-building
- Solid-state silicon technology
- Meets MSL 1 Requirements
- ROHS compliant



SMB



Schematic Diagram

Ordering Information

Device	Qty per Reel	Reel Size
PxxxxSCX	2500	13 Inch

Maximum Ratings and Electrical Characteristics

Symbol	Parameter		Value	Unit
I_{PP}	Non-repetitive peak pulse current	10/1000 μs	100	A
		5/310 μs	150	
		8/20 μs	400	
V_{PP}	Non-repetitive peak pulse voltage	10/700 μs	6000	V
V_{ESD}	ESD Rating per IEC61000-4-2:	Contact	8	KV
		Air	15	
T_s	Storage temperature range		-40 to +150	°C
T_j	Maximum junction temperature		150	°C

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

*Other voltages may be available upon request.


Electrical Parameters ($T_{amb}=25^{\circ}\text{C}$)

Type	V_{RM}	I_{RM}	V_{BO}	I_{BO}	V_T	I_T	C_O	I_H
	Min.		Max.	Max.	Max.		Tpy.	Tpy.
	V	μA	V	mA	V	A	pF	mA
P0080SCX	6	5	25	800	4	2.2	100	50
P0220SCX	15	5	35	800	4	2.2	100	50
P0300SCX	25	5	40	800	4	2.2	100	50
P0640SCX	58	5	77	800	4	2.2	100	150
P0720SCX	65	5	88	800	4	2.2	100	150
P0900SCX	75	5	98	800	4	2.2	90	150
P1100SCX	90	5	130	800	4	2.2	90	150
P1300SCX	120	5	160	800	4	2.2	90	150
P1500SCX	140	5	180	800	4	2.2	85	150
P1800SCX	170	5	220	800	4	2.2	85	150
P2000SCX	180	5	220	800	4	2.2	85	150
P2300SCX	190	5	260	800	4	2.2	150	150
P2600SCX	220	5	300	800	4	2.2	150	150
P3100SCX	275	5	350	800	4	2.2	80	150
P3500SCX	320	5	400	800	4	2.2	65	150
P3800SCX	340	5	450	800	4	2.2	32	50
P4200SCX	400	5	540	800	4	2.2	32	50
P4500SCX	420	5	540	800	4	2.2	65	50
P8500SCX	750	5	940	800	4	2.2	25	50

Notes:

- All measurements are made at an ambient temperature of 25°C . I_{PP} applies to -40°C through $+85^{\circ}\text{C}$ temperature range.
- Off-state capacitance (C_O) is measured at 1 MHz with a 2 V bias and is typical value.

Symbol	Parameter
V_{RM}	Stand-off voltage
V_{BR}	Breakdown voltage
V_{BO}	Switching Voltage
I_{BO}	Break over current
I_{RM}	Leakage current at VRM
I_{PP}	Peak pulse current
I_H	Holding current
V_T	On-state Voltage at I_T
C_O	Off-state Capacitance

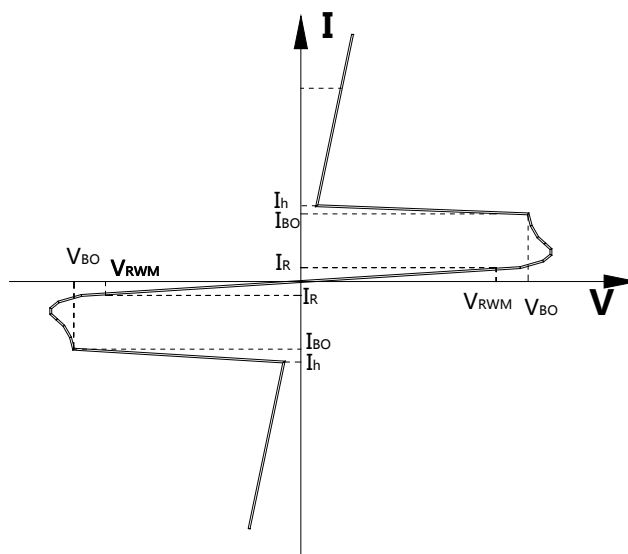

Typical electrical characterist applications

Rating and Characteristics Curves

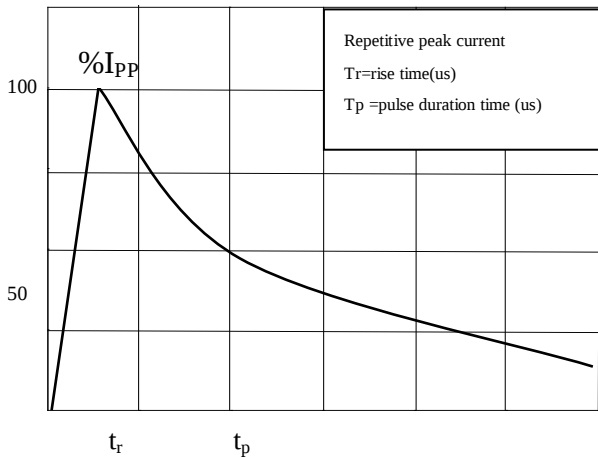


Fig.1 Pulse Waveform (5/310us)

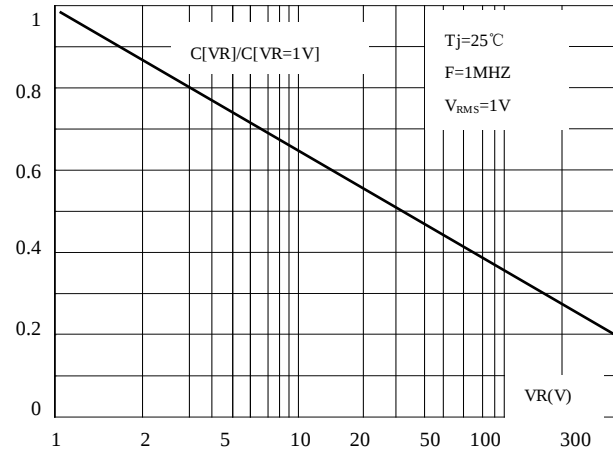


Fig. 2 Relation Variation Of Junction Capacitance Versus Reverse Voltage Applied (Typical Values)

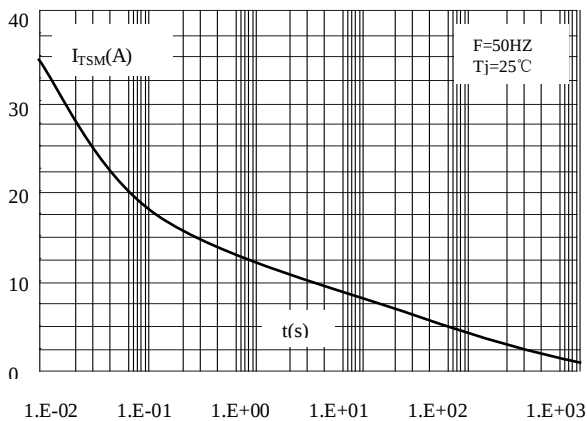


Fig.3 Non Repetitive Surge Peak On-State Current Versus Overload Duration

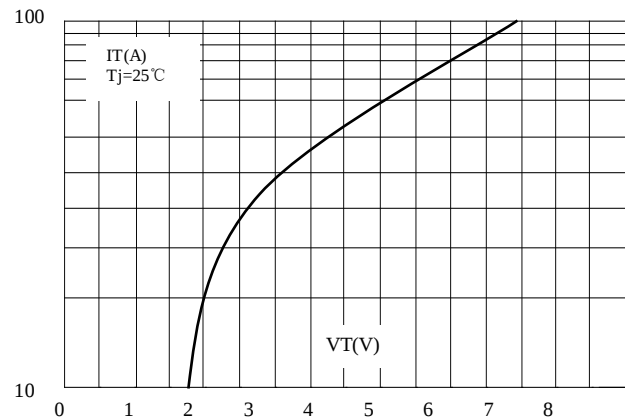


Fig.4 On-State Voltage Versus On-State Current (Typical Values)

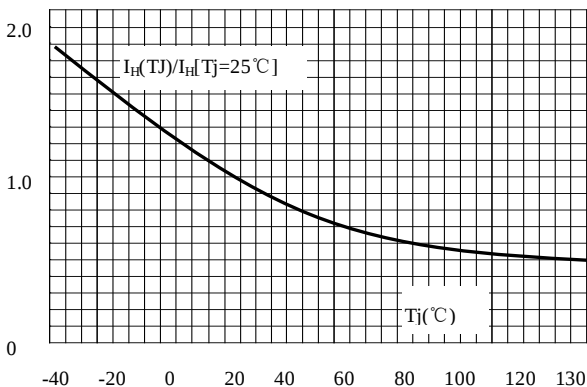


Fig.5 Relative Variation of Hold Current Versus Junction Temperature

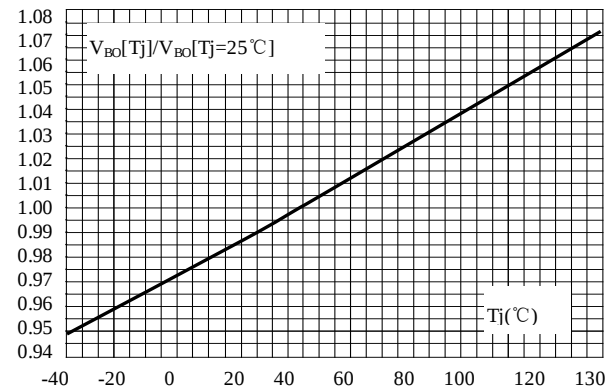


Fig.6 Relative Variation of Break Over Voltage Versus Junction Temperature

Typical electrical characterist applications

Rating and Characteristics Curves

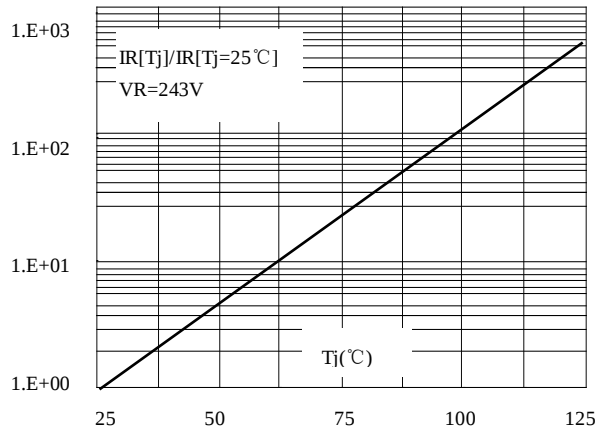


Fig.7 Relative Variation Of Leakage Current Versus Reverse Voltage (Typical Values)


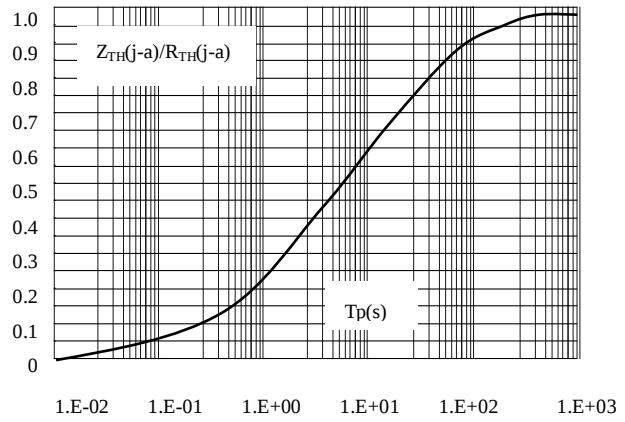


Fig.8 Variation Of Thermal Impedance Junction To Ambient Versus Pulse Duration

SOLDERING PARAMETERS

Reflow Condition		Pb-Free assembly
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150 $^\circ\text{C}$
	-Temperature Max($T_{s(max)}$)	+200 $^\circ\text{C}$
	-Time (Min to Max) (t_s)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L)to peak)		3 $^\circ\text{C}/\text{sec. Max}$
$T_{s(max)}$ to T_L - Ramp-up Rate		3 $^\circ\text{C}/\text{sec. Max}$
Reflow	-Temperature(T_L)(Liquid us)	+217 $^\circ\text{C}$
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_p)		+260(+0/-5) $^\circ\text{C}$
Time within 5 $^\circ\text{C}$ of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6 $^\circ\text{C}/\text{sec. Max}$
Time 25 $^\circ\text{C}$ to Peak Temp (T_p)		8 min. Max
Do not exceed		+260 $^\circ\text{C}$

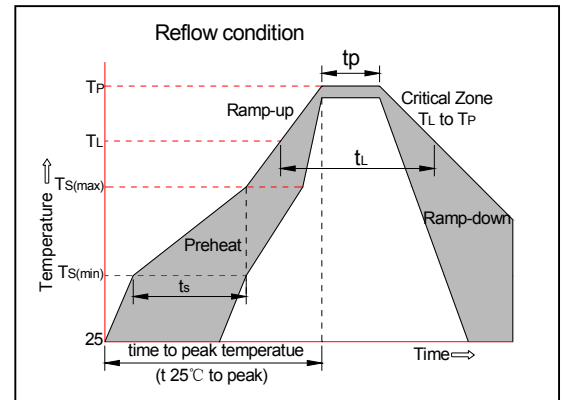


Package information

SMB

SMB Mechanical Data


- Case: SMB
- Case Material: Molded Plastic. UL Flammability
- Classification Rating 94V-0
- Polarity Indicator: Cathode Band (Note: Bi-directional devices have no polarity indicator.)
- Weight: 0.003 ounces, 0.093 gram

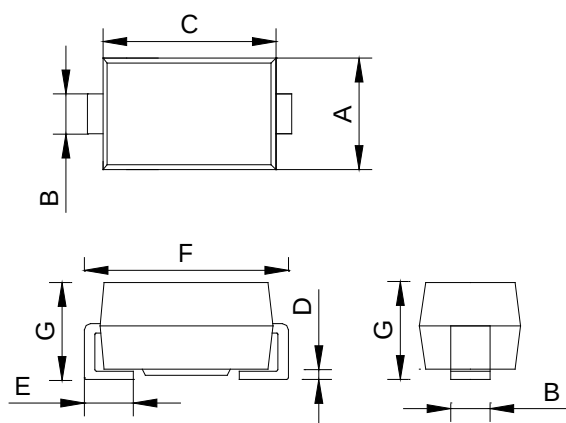

DIM	Millimeters			Inches		
	Min	Nom	Max	Min	Nom	Max
A	3.30	3.62	3.94	0.130	0.142	0.155
B	1.95	2.08	2.20	0.077	0.082	0.087
C	4.06	4.40	4.57	0.160	0.173	0.180
D	0.125	0.20	0.305	0.005	0.008	0.012
E	0.76	1.14	1.52	0.030	0.045	0.06
F	4.95	5.40	5.59	0.194	0.213	0.22
G	2.05	2.30	2.50	0.080	0.090	0.098

SMB


SMB Reel Dim

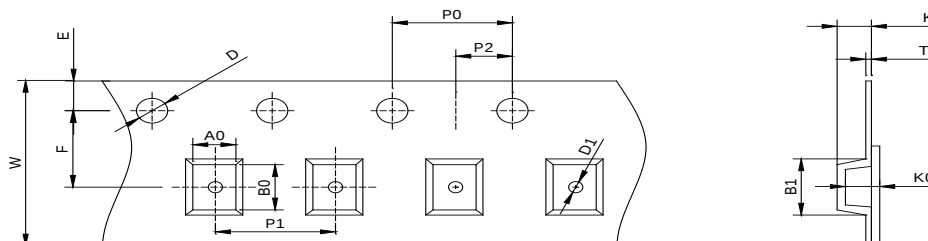

A0	B0	B1	D	D1	E	F	K0	T	W	P0	P1	P2
4.0	5.9	6.1	1.5	1.5	1.75	5.5	3.0	0.50	12.0	4.0	8.0	2.0

Dimension is in mm


Leader and Trailer

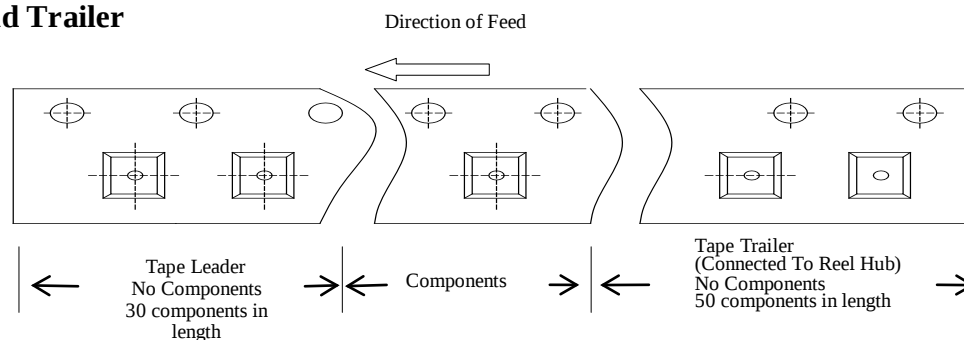


The LEADER is a minimum of 30 components in length and it consists of empty cavities with sealed cover tape

The TRAILER is a minimum of 50 components in length and it consists of empty cavities with sealed cover tape.

Marking Codes

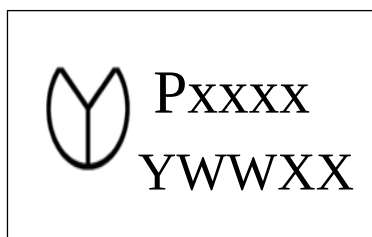

Or

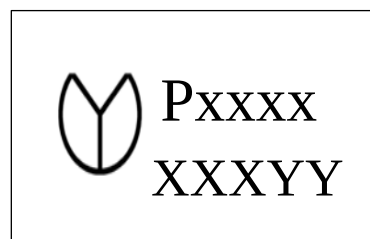**Note:**

- (1) "Pxxxx" is part number, fixed.
- (2) "YWW" is Date code, "XX" is internal code.

Note:

- (1) "Pxxxx" is part number, fixed.
- (2) "XXX" is the last 3 characters of the wafer's Lot No.,
"YY" is internal code.