

1621474

https://www.phoenixcontact.com/us/products/1621474

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

CHARX connect, Mobile AC charging cable with Vehicle Connector and Infrastructure Plug, GB/T, GB/T 20234.2, 16 A / 250 V (AC), housing: black, gray, cable: 5 m, black, straight



Product description

Mobile AC charging cable with vehicle charging connector and infrastructure charging plug for charging electric vehicles with alternating current (AC), compatible with AC GB/T vehicle charging inlets and AC GB/T infrastructure charging sockets at charging stations

Commercial data

Item number	1621474
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	XWBAAF
GTIN	4046356934008
Weight per piece (including packing)	1,600 g
Weight per piece (excluding packing)	1,600 g
Country of origin	DE



1621474

https://www.phoenixcontact.com/us/products/1621474

Technical data

Product properties

Product type	AC charging cable
Product family	CHARX connect
Application	Mobile AC charging cable with Vehicle Connector and Infrastructure Plug
Charging mode	Mode 3
Charging standard	GB/T

Electrical properties

Type of signal transmission	Pulse width modulation
Note on the connection method	Crimp connection, cannot be disconnected
Coding	680 $Ω$ (between PE and CC)
Type of charging current	AC single-phase
Charging power	4 kW
Charging current	16 A

Power contact

Number	3 (L, N, PE)
Rated voltage	250 V
Rated current	16 A

Signal contact

Number	2 (CP, CC)
Rated voltage	30 V AC
Rated current	2 A

Material specifications

Color (Housing)	black (9005)
Color (Handle area)	black (9005)
Color (Actuating element)	silver grey (7001)
Color (Mating face)	black (9005)
Color (Protective cap)	black (9005)
Color (Cable)	black (9005)
Material (Vehicle charging connector)	Plastic
Material (Cable outer sheath)	TPE-U
Material (Contact surface)	Silver

Cable/line

Cable length	5 m
Cable type	Class 6
Cable type	straight
Cable structure	3 x 2.5 mm² + 1 x 0.5 mm²
External cable diameter	10.50 mm ±0.4 mm



1621474

https://www.phoenixcontact.com/us/products/1621474

Outer sheath, material	TPE
Cable resistance	\leq 0.0076 Ω /m (based on a power core, at an ambient temperature of 20°C)
Bending radius	min. 157.5 mm (15x diameter)
Cable length	5 m
External cable diameter	10.50 mm ±0.4 mm
Cable type	Class 6
Cable resistance	\leq 0.0076 Ω /m (based on a power core, at an ambient temperature of 20°C)

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 10000
Insertion force	< 100 N
Withdrawal force	< 100 N

Environmental and real-life conditions

Ambient conditions

Degree of protection (Vehicle charging inlet)	IP55 (plugged in; when plugged in and ready to operate, the degree of protection is only ensued if both plug-in components are original products from Phoenix Contact or suitable standard-compliant products)
Degree of protection (Infrastructure charging plug)	IP55 (plugged in; when plugged in and ready to operate, the degree of protection is only ensued if both plug-in components are original products from Phoenix Contact or suitable standard-compliant products)
Degree of protection (Protective cap)	IP54
Ambient temperature (operation)	-30 °C 50 °C
Ambient temperature (storage/transport)	-40 °C 80 °C
Altitude	5000 m (above sea level)

Standards and regulations

Standards


	Standards/regulations	GB/T 20234.2



1621474

https://www.phoenixcontact.com/us/products/1621474

Drawings

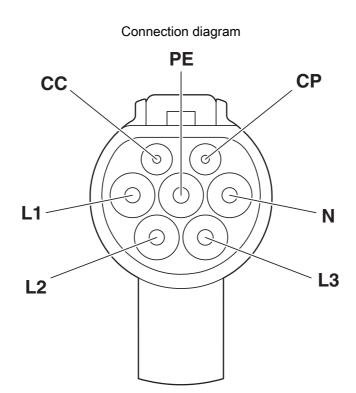


Pin assignment of the Vehicle Connector



1621474

https://www.phoenixcontact.com/us/products/1621474

Schematic diagram

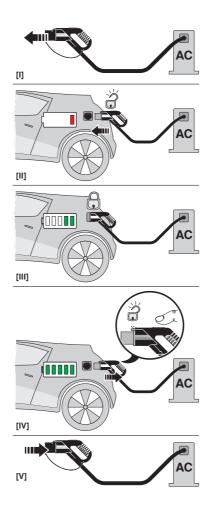

Operating instructions



1621474

https://www.phoenixcontact.com/us/products/1621474

Classifications

UNSPSC

UNSPSC 21.0 39121522



1621474

https://www.phoenixcontact.com/us/products/1621474

Environmental product compliance

China RoHS

Environment friendly use period (EFUP)	EFUP-10
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com