TE Internal #: 8-55825-2


Butt Splice, 16 – 14 AWG Wire Size, 1.25 – 2 mm² Wire Size, Sealable, 4.83 mm [.19 in] Barrel Inside Diameter, 2050 – 5180 CMA

Wire Size, Splices

View on TE.com >



Terminals & Splices > Splices

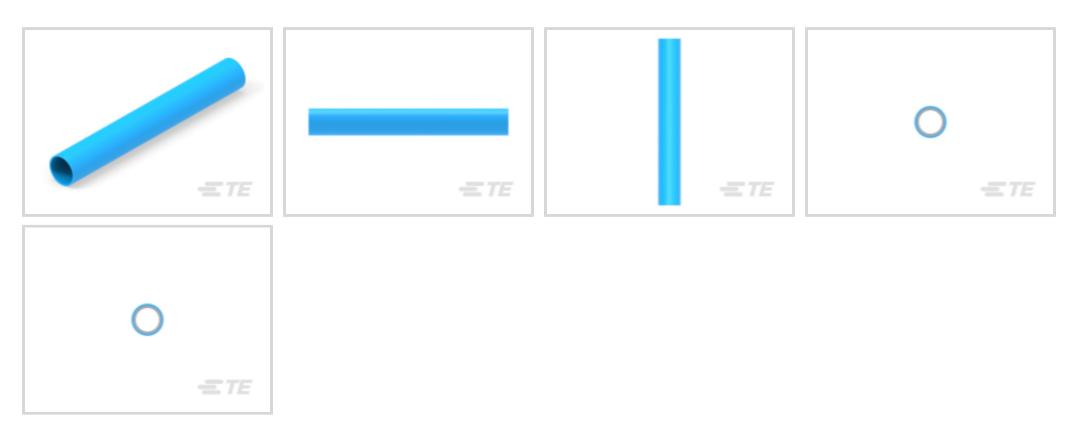

Splice Type: **Butt Splice**Wire Size: **1.25 – 2 mm²**

Sealable: Yes

Compatible Insulation Diameter Range: 4.83 mm [.19 in]

Features

Product Type Features

Splice Type	Butt Splice
Sealable	Yes
Compatible With Discrete Wire Type	Stranded
Wire Insulation Support Retention Type	Insulation Support

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire	
-----------------------------------	---------------	--

Body Features

Insulation Material	Polyolefin
Product Weight	.002 g
Primary Product Color	Blue

Contact Features

Terminal Plating Material	Tin
Contact Base Material	Copper
Barrel Type	Closed

Mechanical Attachment



Wire Insulation Support	With
Dimensions	
Wire Size	2050 – 5180 CMA
Compatible Insulation Diameter Range	4.83 mm[.19 in]
Barrel Inside Diameter	4.83 mm[.19 in]
Product Length	40.79 mm[1.606 in]
Usage Conditions	
Insulation Option	Fully Insulated
Insulation Option Operating Temperature Range	Fully Insulated -55 – 125 °C[-67 – 257 °F]
Operating Temperature Range	
Operating Temperature Range Industry Standards	-55 – 125 °C[-67 – 257 °F]
Operating Temperature Range Industry Standards Government Qualified Splice	-55 – 125 °C[-67 – 257 °F]

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits




as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts









Customers Also Bought















Documents

Product Drawings

16-14 PRE-INSUL SEALED SPLICE

English

CAD Files

Customer View Model

ENG_CVM_CVM_8-55825-2_K.2d_dxf.zip

English

3D PDF

3D

Customer View Model



ENG_CVM_CVM_8-55825-2_K.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_8-55825-2_K.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Instruction Sheets

Instruction Sheet (U.S.)

English