


AD5020 SERIES

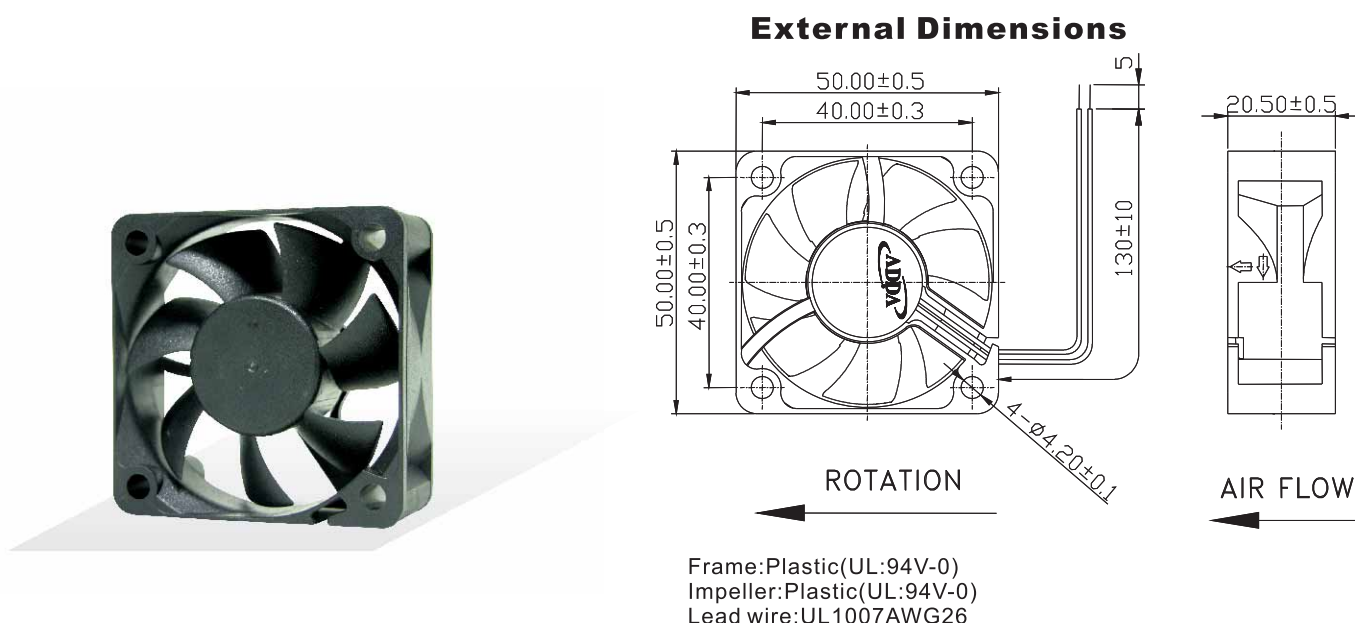

Specifications(Nominal)


*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ※=Sleeve ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Speed (rpm)	Maximum AirFlow		Maximum Pressure		*Noise Level (dB/A)	Weight (g)
50x50x20	AD5012LB-C71	◎ ●	12	0.12	1.44	3600	0.330	11.65	0.076	1.95	24.7	32.0
	AD5012MB-C71	◎ ●	12	0.15	1.80	4300	0.396	14.00	0.108	2.75	30.8	
	AD5012HB-C71	◎ ●	12	0.22	2.64	5000	0.457	16.15	0.140	3.55	34.4	
	AD5012UB-C71	◎ ●	12	0.30	3.60	6000	0.556	19.65	0.203	5.15	40.0	
	AD5024LB-C71	◎ ●	24	0.08	1.92	3600	0.330	11.65	0.076	1.95	24.7	
	AD5024MB-C71	◎ ●	24	0.10	2.40	4300	0.396	14.00	0.108	2.75	30.8	
	AD5024HB-C71	◎ ●	24	0.15	3.60	5000	0.457	16.15	0.140	3.55	34.4	
	AD5024UB-C71	◎ ●	24	0.20	4.80	6000	0.556	19.65	0.203	5.15	40.0	

Specifications subject to change without notice.

The specification for bearing type is for reference only , for more bearing types information, please contact with your ADDA sales representative, thanks!!
 (網頁上呈現產品軸承資訊均以2Ball為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝!!)

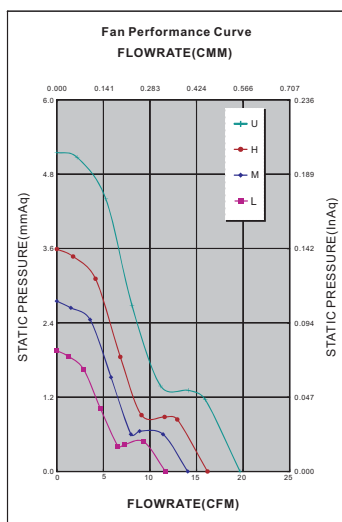

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
	✓	✓	✓							

*Safety approvals

				
✓	✓		✓	✓