

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作



由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

RoHS


由 Autodesk 教育版产品制作

MAPX	MODIFICATION	DRW	DATE

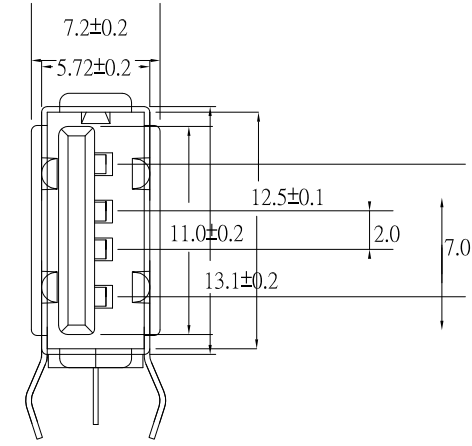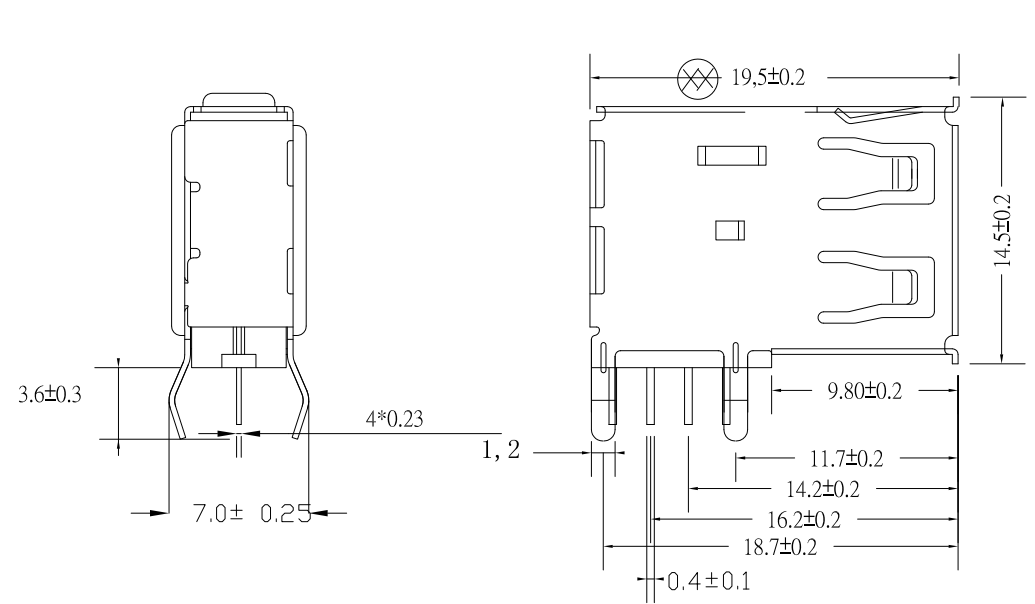

NOTES:
1. MATERIAL SPECIFICATION
1) INSULATION MATERIAL THERMOPLASTIC.
2) SHELL: COPPER ALLOY/SPCC, T: 0.30mm
PLATING: NICKEL
3) TERMINAL: COPPER ALLOY, T: 0.25mm
PLATING: GOLD/TIN PLATED.
2. ELECTRICAL CHARACTERISTIC:
1) INSULATION RESISTANCE: 1000MΩ MIN.
2) CONTACT RESISTANCE: 30mΩ MAX.
3) WITHSTANDING VOLTAGE: 500V AC.
3. MECHANICAL CHARACTERISTICS:
1) INSERTION FORCE: 3.57Kgf MAX.
2) EXTRACTION FORCE: 1.02Kgf MIN.
ORDERING INFORMATION

保存环境：干燥常温环境，避免接触酸性和潮湿气候

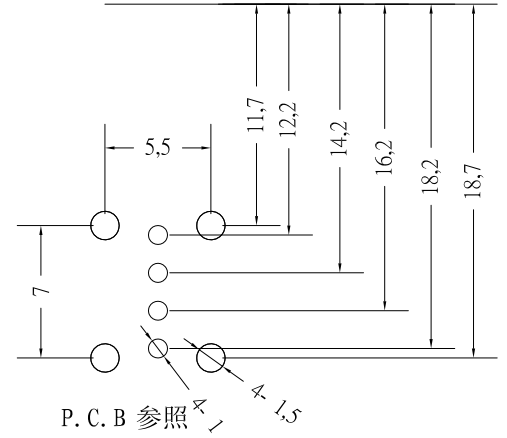

产品图 PRODUCT CHART DWG		深圳市精拓金电子有限公司 Shenzhen Jing Tuo Jin Electronics Co., Ltd.							
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	许榕强	制图料号 PRODUCT PART NO.	906-952A101CD10200		
X.	±0.25	X.	±5°	比例 SCALE	郭志富	产品名称 PRODUCT NO.	AF侧插长体铜壳弯脚有卷边白胶 PBT-带后塞 (LYD)		
.X	±0.20	.X	±2°	日期 DATE	黄国荣	角法 VIEW	版本 VER	AO	
.XX	±0.15	.XX	±1°						
.XXX	±0.10	.XXX	±0.5°						