

# BLT-T2-320-UT - Type 2 surge arrester



2906100

<https://www.phoenixcontact.com/us/products/2906100>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Type 2 surge arrester for universal mounting in lights and cable connection boxes. Specifically for insulation class II with optical fault indication. Installation in branch or through wiring. Version: 230 V AC

## Your advantages

- Optimal additional protection of the building installation for longer service life and increased availability of the end devices
- Optimal protection of the power supply for longer service life and increased availability of the LED lighting
- Excellent level of information provided, thanks to shutdown function for the load circuit in the event of an error
- Simple condition monitoring without voltage on the device with a mechanical/visual status indicator
- Flexible installation, thanks to mounting via integrated elongated holes
- Specifically for insulation class II with double or reinforced insulation
- Flexible installation
- Fixed via integrated elongated holes
- Compact design
- Optical status indicator
- Stub or through-wiring connection
- Double or reinforced insulation
- Universal use for street, tunnel or object lighting
- L' signalizes the failure of the surge protective device due to disconnection of the power supply to the lights

## Commercial data

Item number	2906100
Packing unit	10 pc
Minimum order quantity	1 pc
Product key	CL1361
Catalog page	Page 77 (C-4-2019)
GTIN	4055626058078
Weight per piece (including packing)	39 g
Weight per piece (excluding packing)	39 g
Country of origin	CN

# BLT-T2-320-UT - Type 2 surge arrester



2906100

<https://www.phoenixcontact.com/us/products/2906100>

## Technical data

### Product properties

Product type	Surge arrester
IEC test classification	II / III
	T2 / T3
EN type	T2 / T3
IEC power supply system	TT
	TN-C
	IT
Type	Installation module
Surge protection fault message	optical

### Insulation characteristics

Protection class	II
Overvoltage category	III
Pollution degree	2


### Electrical properties

Nominal frequency $f_N$	50 Hz (60 Hz)
Nominal voltage $U_N$	100 V AC ... 277 V AC
Dielectric strength	< 6 kV

### Connection data

Connection method	Screw terminal blocks
Screw thread	M3
Tightening torque	0.6 Nm
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>

### Dimensions

Dimensional drawing	
Width	36.5 mm
Height	56 mm
Depth	34 mm

### Material specifications

Color	light grey (RAL 7035)
Flammability rating according to UL 94	V-0
CTI value of material	600
Insulating material	PA 6.6

# BLT-T2-320-UT - Type 2 surge arrester



2906100

<https://www.phoenixcontact.com/us/products/2906100>

Material group	I
Housing material	PA 6.6

## Protective circuit

Mode of protection	L-N
Direction of action	1L-N
Nominal voltage $U_N$	100 V AC ... 277 V AC
Nominal frequency $f_N$	50 Hz (60 Hz)
Maximum continuous voltage $U_C$	320 V AC
Rated load current $I_L$	16 A
Nominal discharge current $I_n$ (8/20) $\mu$ s	5 kA
Maximum discharge current $I_{max}$ (8/20) $\mu$ s	10 kA
Combination wave $U_{OC}$	10 kV
Short-circuit current rating $I_{SCCR}$	3 kA
Voltage protection level $U_p$	$\leq 1.3$ kV
Residual voltage $U_{res}$	$\leq 1.3$ kV (at $I_n$ ) $\leq 1.3$ kV (at $U_{OC}$ )
TOV behavior at $U_T$	400 V AC (5 s / withstand mode) 528 V AC (120 min / safe failure mode)
Response time $t_A$	$\leq 25$ ns
Max. backup fuse with V-type through wiring	16 A (MCB B/C)
Max. backup fuse with branch wiring	16 A (MCB B/C)

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	$\leq 2000$ m (amsl)
Permissible humidity (operation)	5 % ... 95 %

## Standards and regulations

Standards/specifications	IEC 61643-11
Note	2011
Standards/specifications	EN 61643-11
Note	2012

## Mounting

Mounting type	4 mm screw
---------------	------------


# BLT-T2-320-UT - Type 2 surge arrester

2906100


<https://www.phoenixcontact.com/us/products/2906100>

## Drawings

Circuit diagram

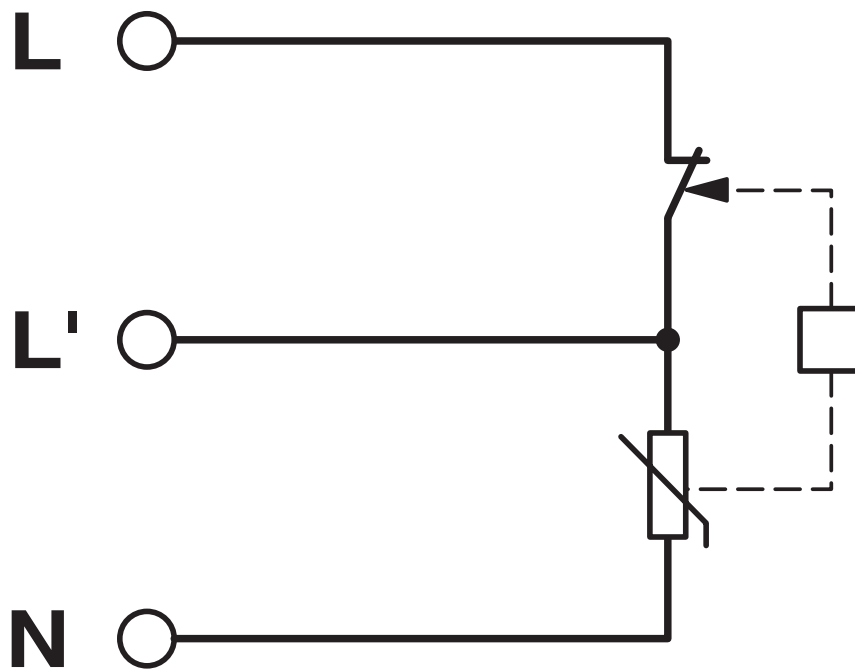

Dimensional drawing

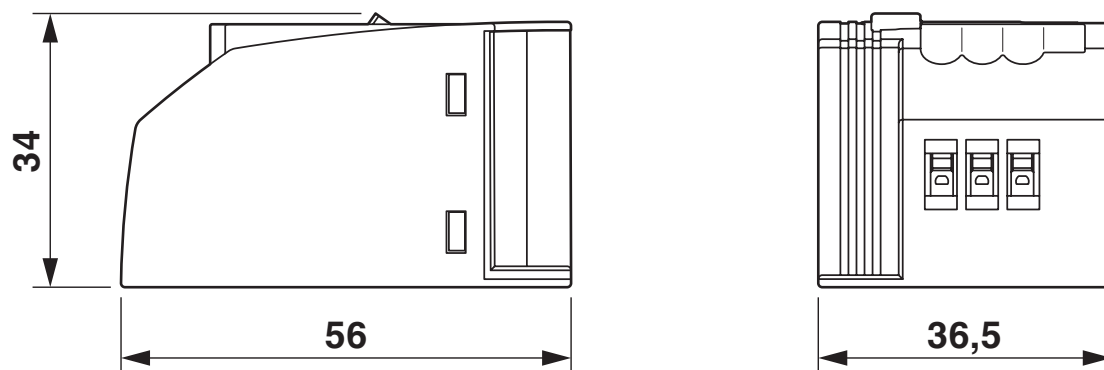


# BLT-T2-320-UT - Type 2 surge arrester

2906100

<https://www.phoenixcontact.com/us/products/2906100>



Drilling plan/solder pad geometry

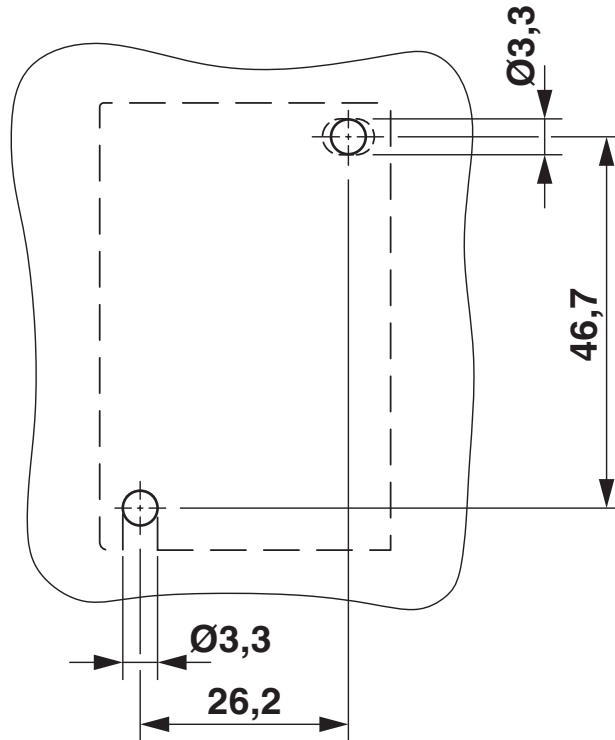

# BLT-T2-320-UT - Type 2 surge arrester



2906100

<https://www.phoenixcontact.com/us/products/2906100>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2906100>



**IECEE CB Scheme**

Approval ID: NL-36565



**EAC**

Approval ID: RU C-DE.\*09.B.00169

**CCA**

Approval ID: NTR-NL 7418



**KEMA-KEUR**

Approval ID: 2179938.01

**UAE-RoHS**

Approval ID: 23-10-88350

# BLT-T2-320-UT - Type 2 surge arrester



2906100

<https://www.phoenixcontact.com/us/products/2906100>

## Classifications

### ECLASS

ECLASS-11.0	27130805
ECLASS-13.0	27171202

### ETIM

ETIM 9.0	EC000941
----------	----------

### UNSPSC

UNSPSC 21.0	39121600
-------------	----------

# BLT-T2-320-UT - Type 2 surge arrester



2906100

<https://www.phoenixcontact.com/us/products/2906100>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%



# BLT-T2-320-UT - Type 2 surge arrester

2906100

<https://www.phoenixcontact.com/us/products/2906100>



## Accessories

### SZS 0,6X3,5 VDE - Screwdriver

1212602

<https://www.phoenixcontact.com/us/products/1212602>



Screwdriver, slot-headed, VDE insulated, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)