
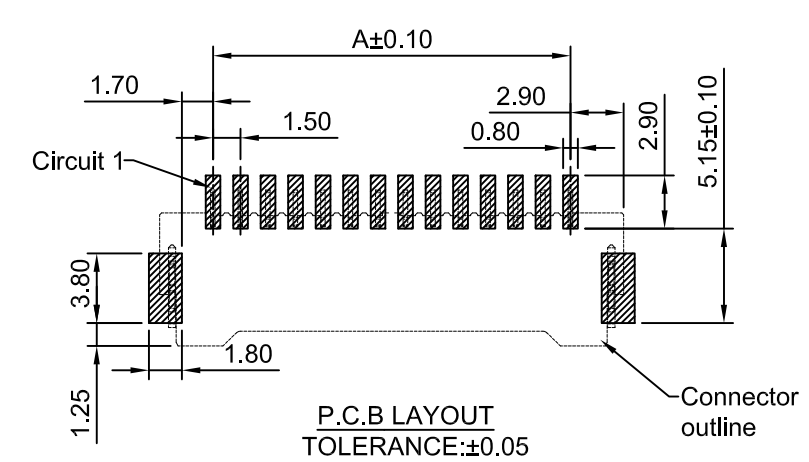
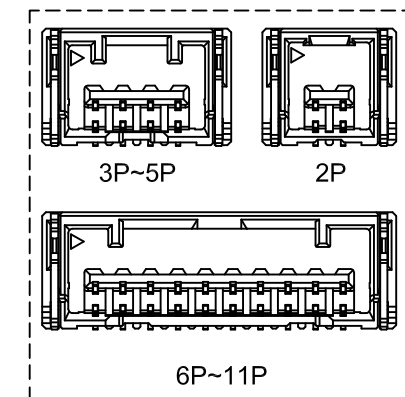
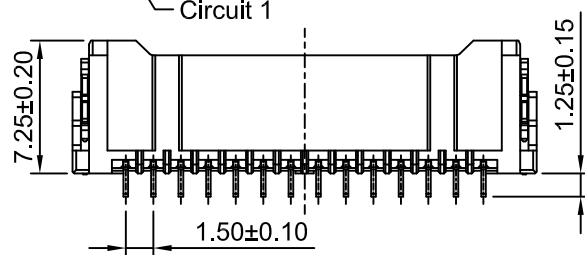

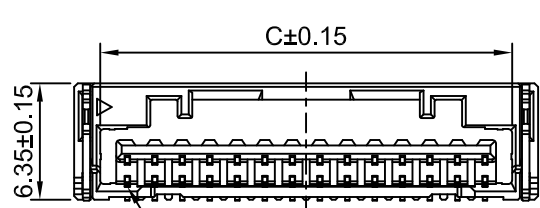
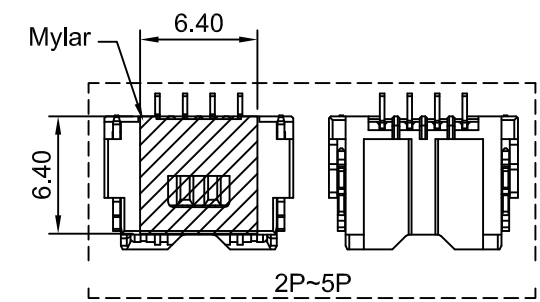


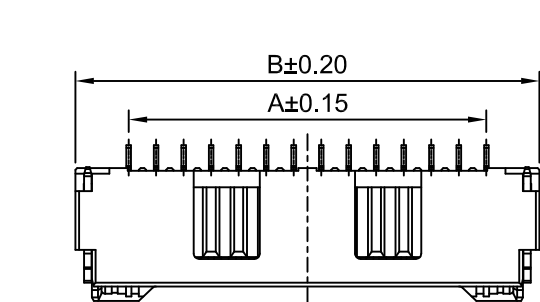

Ordering Information:

A1501WRA-S-XP - ***
1 2

1.Part No.

2.Material:

(Blank):LCP,UL94V-0

GWT:LCP,UL94V-0,IEC 60335-1,5th Edition
Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 2A AC,DC (AWG #24)

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Phosphor Bronze/Tin over Nickel

Solder Tabs Material: Brass/Tin over Nickel

Wafer Material: LCP,UL94V-0(Beige)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A1501WVA-S-2P	1.50	7.30	4.45
A1501WVA-S-3P	3.00	8.80	5.95
A1501WVA-S-4P	4.50	10.30	7.45
A1501WVA-S-5P	6.00	11.80	8.95
A1501WVA-S-6P	7.50	13.30	10.45
A1501WVA-S-7P	9.00	14.80	11.95
A1501WVA-S-8P	10.50	16.30	13.45
A1501WVA-S-9P	12.00	17.80	14.95
A1501WVA-S-10P	13.50	19.30	16.45
A1501WVA-S-11P	15.00	20.80	17.95
A1501WVA-S-12P	16.50	22.30	19.45
A1501WVA-S-13P	18.00	23.80	20.95
A1501WVA-S-14P	19.50	25.30	22.45
A1501WVA-S-15P	21.00	26.80	23.95

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE
mm	2.5:1	1 of 1	1.50mm PITCH RIGHT-ANGLE WAFER - SMD TYPE
DRAWN	CHK'D	APPR	
Chengblao Ye	Dlankul Wan	Jack Yin	

A2	CHANGE THE DRAWING	2023.05.11	General Tolerances x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°	THIRD ANGLE PROJECTION 	DRAWING NO.	REV
A1	CHANGE THE DRAWING	2021.07.23				
A0	NEW RELEASE	2017.04.17				
REV	DESCRIPTION	DATE				

A1501WRA-S-XP	A2
---------------	----