


REVISION HISTORY			
REV	DATE	BY	DESCRIPTION
H	18JUN2024	BVM/SAK	PRN: P2024-1044

D

C


B

A

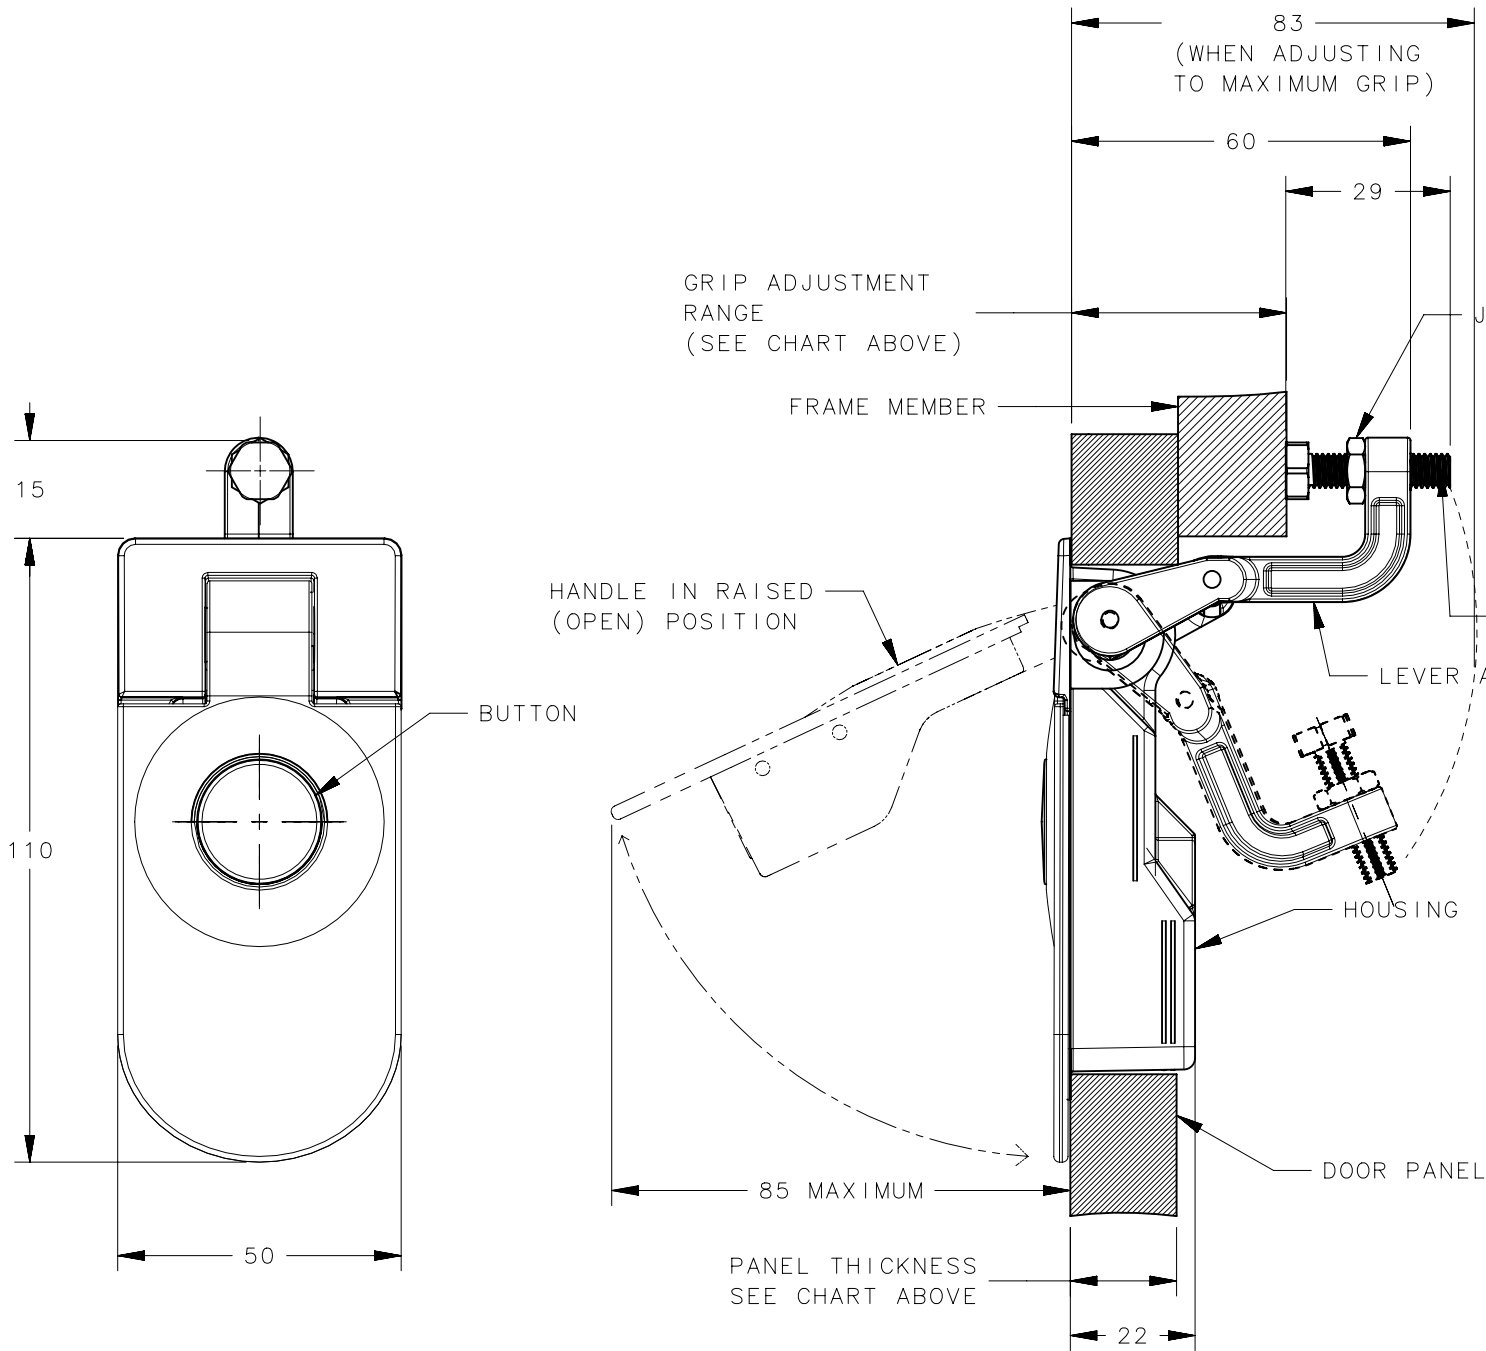

MOUNTING AND
ADJUSTMENT SCREWS
ARE M6 THREAD

* SHORT LEVER GRIP RANGE AVAILABLE FROM 1 TO 14 MM.
REFERENCE DRAWING NUMBER J-C5-1
MEDIUM LEVER GRIP RANGE AVAILABLE FROM 14 TO 29 MM.
REFERENCE DRAWING NUMBER J-C5-2

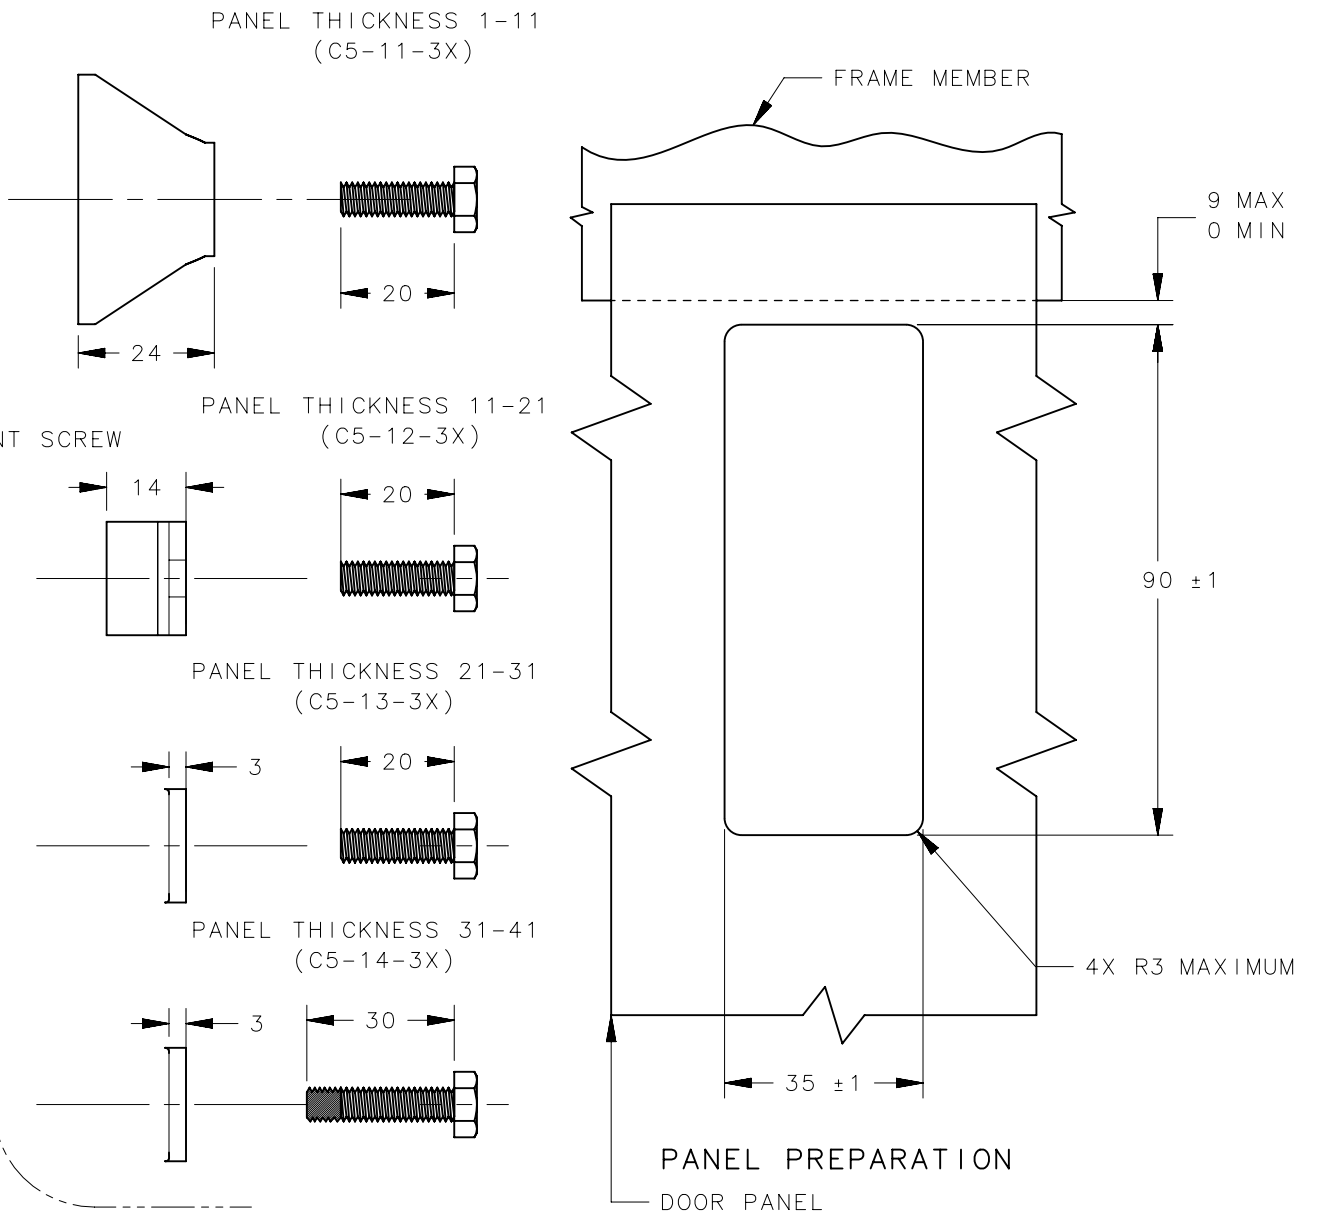

NOTES:

A. MATERIAL AND FINISH:

- HOUSING, HANDLE , BUTTON AND PAWL:
DIE CAST ZINC, BLACK POWDER COAT WITH STEEL HARDWARE,
- LEVER AND CRANK:
DIE CAST ZINC, COATED WITH CLEAR CHEMICAL PROTECTIVE FILM,
- BLACK TORSION SPRING:
302 STAINLESS STEEL, PASSIVATED,
- ROLL PIN: 420
STAINLESS STEEL, PASSIVATED,
- O-RING:
BUNA-N, NATURAL
- ADJUSTING SCREW, JAM NUT, MOUNTING BRACKET AND SCREW:
1010 STEEL, ZINC PLATE CHROMATE PLUS SEALER

31-41	29-45	C5-14-35
21-31		C5-13-35
11-21		C5-12-35
1-11		C5-11-35
PANEL THICKNESS	LONG LEVER GRIP* RANGE	ASSEMBLY PART NUMBER

THIRD ANGLE PROJECTION				
	MILLIMETERS [IN]			
	TOLERANCES UNLESS OTHERWISE NOTED			
	ALL DIMENSIONS WITHOUT TOLERANCES ARE FOR REFERENCE ONLY.			
PROPRIETARY ITEM EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.	PER ASME Y14.5M-2009		DRAWN BY JGK	
SIZE A3		SYSTEM NX	DWG NO. J-C5-3	DATE 19JUN1992
		SCALE 0.75:1	SHEET 1 OF 1	

southco®
CONNECT • CREATE • INNOVATE

DESCRIPTION
C5 SEALED LEVER LATCH

SCALE 0.75:1