

ROHS

REV.

ECN. #

DESCRIPTION

DATE

A0





NEW RELEASE

04/12/22

A1

ADD MARKING

05/25/22

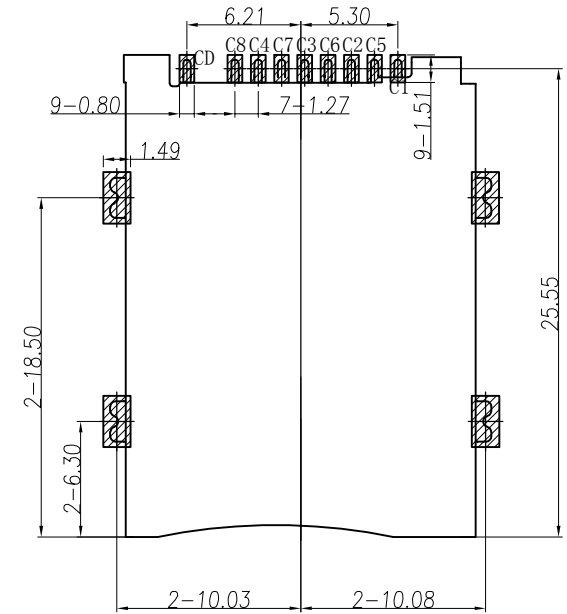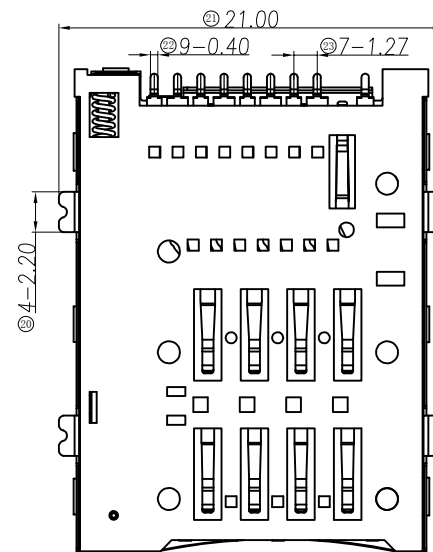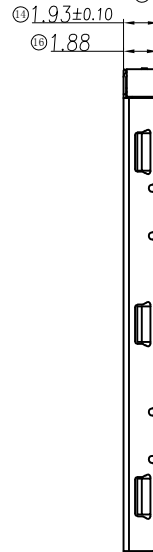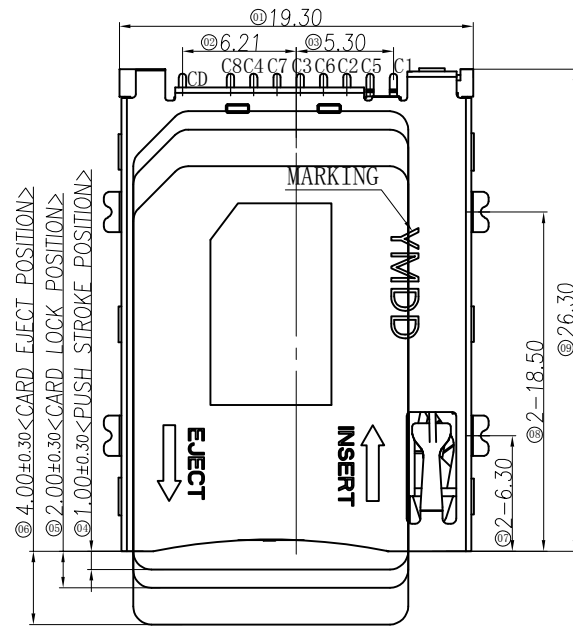

RECOMMENDED PCB LAYOUT

TOLERANCE: ± 0.05

SMT SOLDER AREA

Notes:

- Material:
Housing: High Temperature Thermoplastic
Terminal: Copper Alloy
Shell: Stainless Steel
- Plating:
Terminal: 50u" Ni Underplated Overall
1.5u" Plated On Contact Area
50u" Tin Plated On Solder Area
Shell: 30u" Ni Underplated Overall
G/F Plated On Contact Area And Solder Area
- Technical Speciality:
Rated Voltage: 30V
Current Rating: 0.5A
Insulation Resistance: 1000M Ω Min.
Contact Resistance: 100m Ω Max.
Withstanding Voltage: 500V DC For 1 Minutes.
Operating Temperature: -40°C ~ +75°C Humidity 80% R.H Max.


MARKING NOTES:

Y M DD


01-31: DAY

A-Q: MONTH

0-9: YEAR



Card specifications

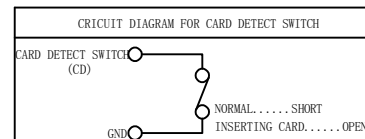

PIIN/NO	ASSIGNMENT	MILLIMETERS	INCH
C1	VCC	X. ° ±2°	X. ° ±2°
C2	RST	.X ±0.30	.X ±0.012
C3	CLK	.XX ±0.20	.XX ±0.008
C4	RESERVED	.XXX ±0.10	.XXX ±0.004
C5	GND		
C6	VPP		
C7	I/O		
C8	RESERVED		
CD	Detect Switch		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd.




东莞市金比莱五金塑胶科技有限公司

DongGuan JinBiLai Metal Plastic Technology Co., Ltd

TITLE	1.93H Push-Push SIM Card	DR		
PART NO.	102014893	CHKD		
PRO J.	PAGE 1/2	UNITS mm	APPD	
SIZE	A4	SCALE 1:1	DIS NO.	SM016-100<客户图>


Direction of use →

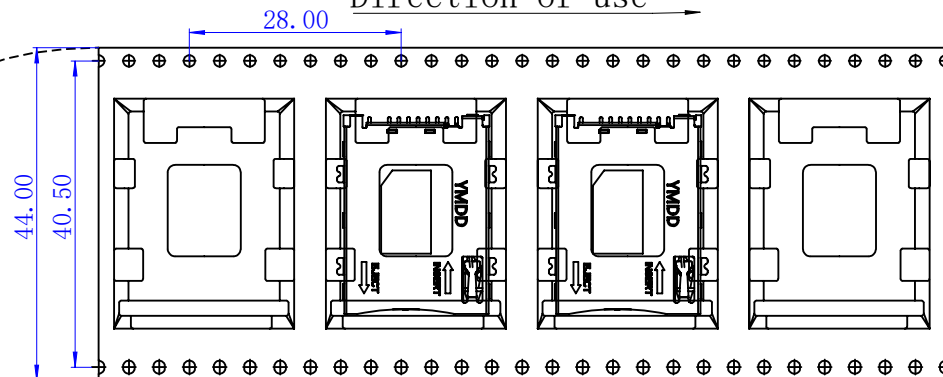

Carrier Tape

Direction of use →


DETAIL B



DETAIL B

NOTES:

- 1、Packing quantity per plate: 500PCS/Plate
- 2、Loading and packing method

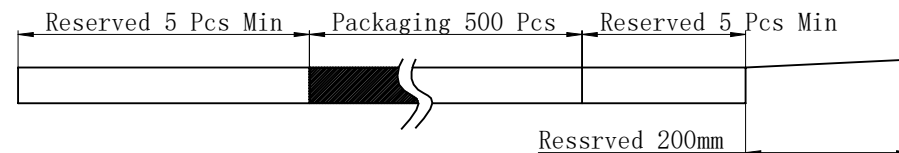

- 3、Total packaging: 3000PCS/Box

The bottom and top of the carton
Pad it with a piece of pearl cotton

BOX

350*350*340mm

6-REEL

packaging tape

label

Part Number	Description	Quantity
303020178	Carrier band (Lucent , PET W=44 PH=28,T=0.3)	85.68m
303040009	Box (K=K,T=7.0,350*350*340)	1PCS
303060001	PE Bag (T=0.08mm , 730*760*730)	1PCS
303070015	Self-adhesive (W=37.5)	86.88m
303110001	Beam (K=K , T=7.0,95*95*290)	4PCS
303130001	Pearl Wool (340*340*18)	2PCS
303180031	REEL (BLUE , 13Inches*24mm , ϕ330)	6PCS
102014893	1.93H PUSH-PUSH SIM CARD<SM016-100>	3000PCS

MILLIMETERS	INCH	东莞市金比莱五金塑胶科技有限公司 DongGuan JinBiLai Metal Plastic Technology Co.,Ltd					
X. ° ±2°	X. ° ±2°						
.X ±0.30	.X ±0.012						
.XX ±0.20	.XX ±0.008						
.XXX ±0.10	.XXX ±0.004						
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd		TITLE	1.93H Push-Push Sim Card	DR			
		PART NUM.	102014893	CHKD			
		PRO J.	PAGE 2/2	UNITS mm	APPD		
		SIZE	A4	SCALE 1:1	DIS NO.	SM016-100<客户图>	