

LTCC 低通滤波器 (Low Pass Filter)

HT-LFCN-1700+

Features

- Low insertion loss.
- Good rejection.
- LTCC Construction.
- temperature stable.
- Small size.



Applications

- Harmonic rejection.
- VHF/UHF transmitters/receivers.
- Lab use.

Pad Connections

RF IN	1
RF OUT	3
GROUND	2,4

Outline Drawing

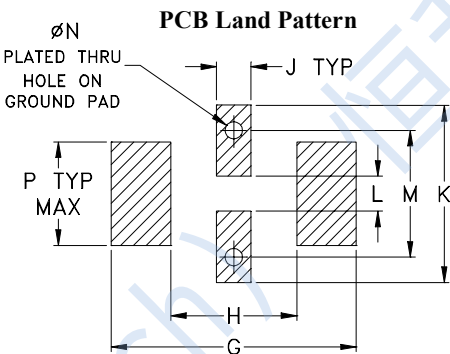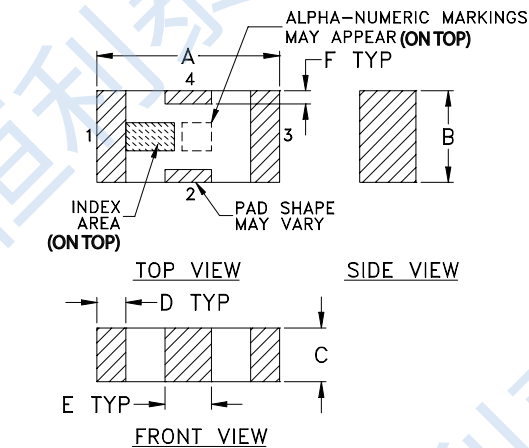



Suggested Layout,
Tolerance to be within ± 0.002

Outline Dimensions : inch mm

A	B	C	D	E	F	G
.126	.063	.037	.020	.032	.009	.169
3.20	1.60	0.94	0.51	0.81	0.23	4.29

H	J	K	L	M	N	P	wt
.087	.024	.122	.024	.087	.012	.071	grams
2.21	0.61	3.10	0.61	2.21	0.30	1.80	.020

Functional Schematic

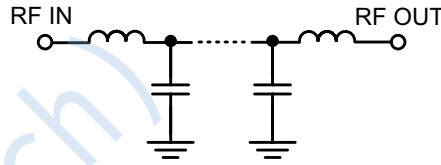



50 Ω
DC to 1700MHz

Electrical Specifications(1) at 25°C


Parameter		Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Insertion Loss	DC-1700	—	—	1.2	dB
	Freq. Cut-Off	2050	—	3.0	—	dB
	VSWR	DC-1700	—	1.2	—	: 1
Stop Band	Rejection Loss	2375	20	—	—	dB
		2500-6500	—	30	—	
		7000	—	20	—	
	VSWR	2375-7000	—	20	—	: 1

1. In Application where DC voltage is present at either input or output ports, coupling capacitors are required.

Typical Performance Data at 25°C

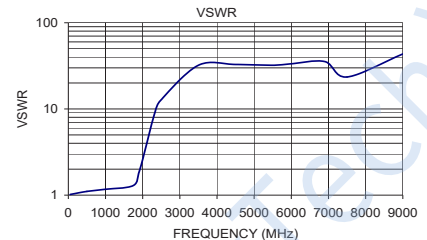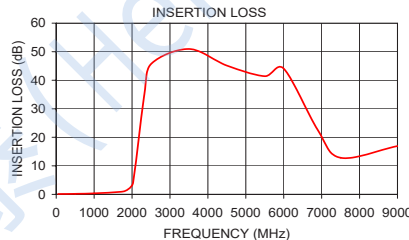

Suggested PCB Layout

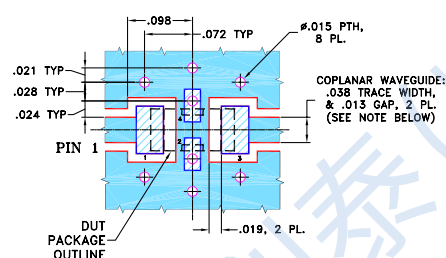

NOTES: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH THICKNESS .020" $\pm$.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Maximum Ratings

Operating Temperature	-55°C to +125°C
Storage Temperature	-55°C to +125°C
RF Power Input*	10W at 25°C

*Permanent damage may occur if any of these limits are exceeded.