


# Actuator

704.210.708

Distribution by DigiKey



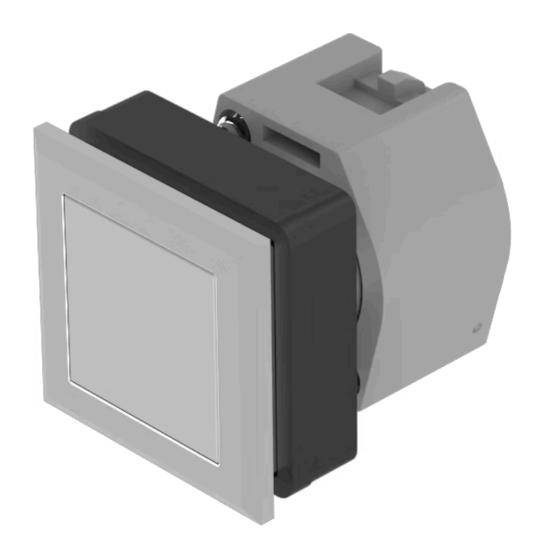



## Your product:



## 704.210.708 Actuator

_	_	_		-
-	к	u	N	

Front bezel material: Plastic

Front bezel colour: Silver

Front dimension: 35 mm x 35 mm

Front form: square

#### **MOUNTING**

**Mounting cut-out:** 30 mm x 30 mm

Design: flush

## **OPERATING-/INDICATION PART**

Lens optics: transparent

Lens illumination: non illuminative

Lens colour: Colourless

Lens shape: flush

Lens material: Plastic

## **ELECTRICAL CHARACTERISTICS**

Standards: The switches comply with the "Standards for low-voltage switching devices" DIN

EN 60947-1

## **MECHANICAL CHARATERISTIC**

**Operating Travel:** ca.  $5.8 \text{ mm} \pm 0.2 \text{ mm}$ 

**Mechanical lifetime:** ≤3 Mio. cycles of operation

Switching action: Momentary

Operating force: 6.2 N

**Weight:** 0.051 kg

### **AMBIENT CONDITION**

**Operating temperature:**  $-40 \, ^{\circ}\text{C} \, ... + 55 \, ^{\circ}\text{C}$ 

Storage temperature:  $-40 \, ^{\circ}\text{C} \dots + 85 \, ^{\circ}\text{C}$ 

**IP Protection:** IP65 front side

### **OTHER**

**Short Description:** Actuator, 30 mm x 30 mm, 35 mm x 35 mm, flush, non illuminative, Colourless,

Plastic, transparent, square, Silver, Plastic, Momentary

Housing colour: Black

Housing material: Plastic


max. number of switching

elements:

3

Hints: Max. 3 switching elements can be clipped on

Mounting cut-outs:




A = Screw terminal

B = Push-in terminal (PIT)

C = Plug-in terminal 6.3 mm x 0.8 mmD = Double plug-in terminal 6.3 mm x 0.8

mm

Wiring diagrams:



**Dimension drawings:** 

