


Feature -


DPST , two buttons in line ,
vertical PCB mount

Application -


office equipments
measuring instruments
audio , TV , VCRs
many types of electronic equipments

SPECIFICATIONS



SWITCH SPECIFICATIONS	
POLE - POSITION	DPST
CONTACT RATING	12 V DC , 50 mA
CONTACT RESISTANCE	100 mΩ MAX. 5 V DC ; 1 A , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 100 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 100 V AC for 1 Minute
OPERATING FORCE	160 ± 50 gf
OPERATING LIFE	500,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C
TOTAL TRAVEL	0.25 ± 0.10 mm

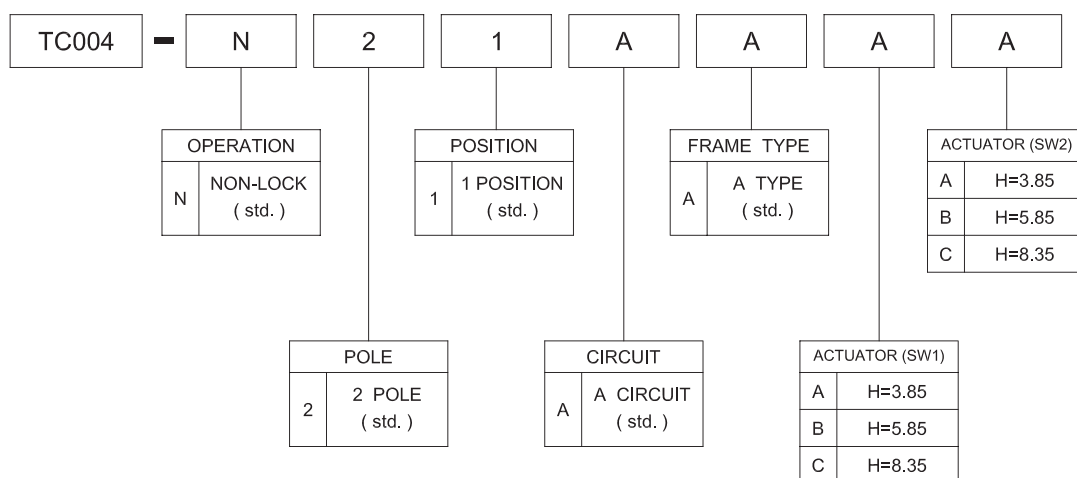HOW TO ORDER


TC004-N21AAAC

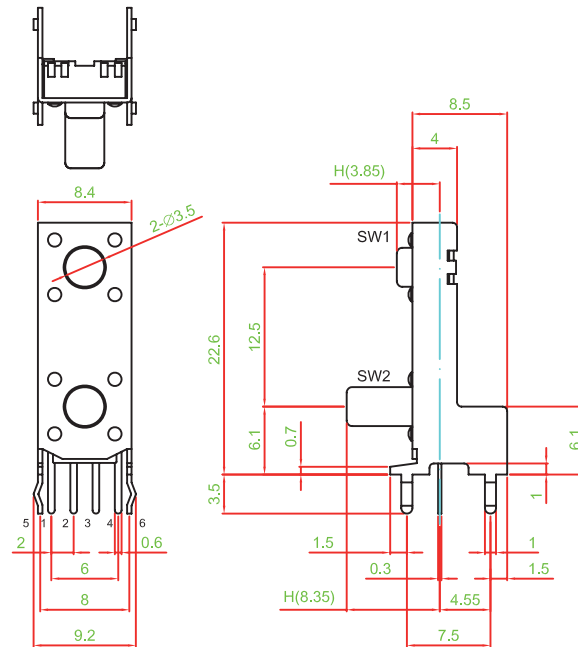

► P.C.B LAYOUT



■ ACTUATOR : PA66
 ■ SPRING PLATE : STAINLESS STEEL
 ■ TERMINAL : BRASS SILVER PLATING
 ■ BASE FRAME : PA66
 ■ FRAME : STEEL PLATE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Well Buying:](#)

[TC004-N21AAAC](#)