




Terminals & Splices > Quick Disconnects

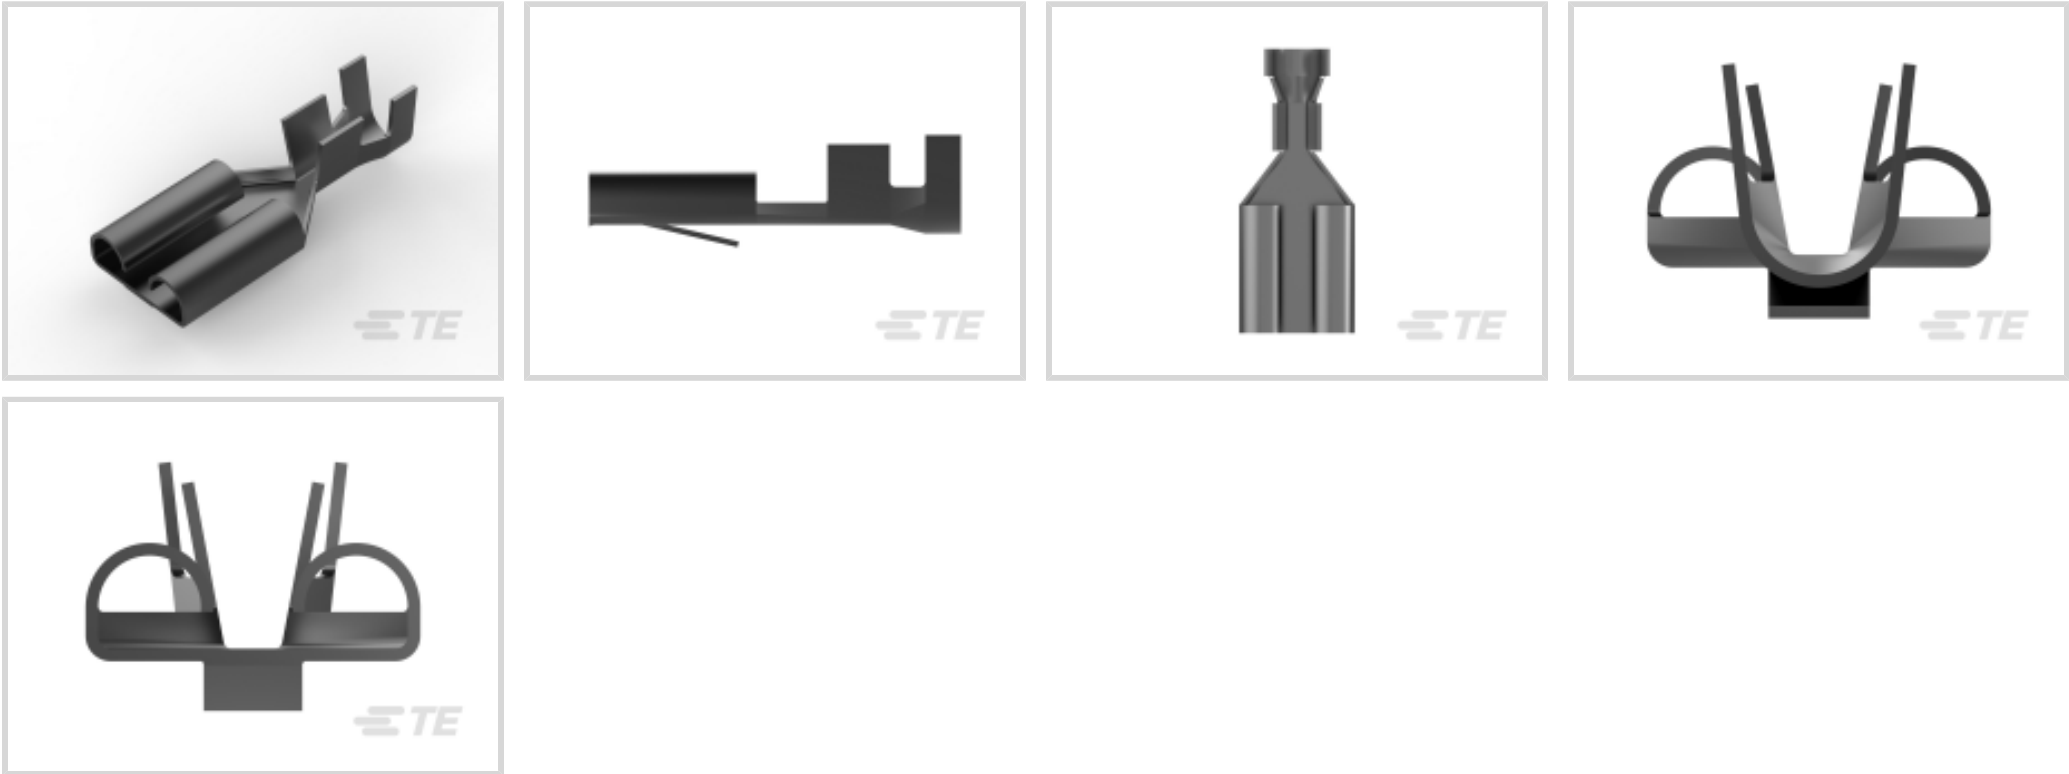

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **4 – 5.2 mm²**

Mating Tab Width: **9.53 mm [.375 in]**

Mating Tab Thickness: **1.22 mm [.048 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	9.53 mm[.375 in]
Mating Tab Thickness	1.22 mm[.048 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Locking Lance

Dimensions

Terminal Material Thickness	.41 mm[.016 in]
Product Length	26.42 mm[1.04 in]
Compatible Insulation Diameter Range	4.1 – 5.3 mm[.161 – .209 in]
Wire Size	4 – 5.2 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Packaging Features

Packaging Quantity	2000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part



numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 280755-4 FF 375 REC 6-10MM2 TPPB	 TE Part # 280756-4 FF 375 REC 3-6MM2 TPPB	 TE Part # 280756-2 FF 375 REC 3-6MM2 TPBR	 TE Part # 280755-2 FF 375 REC 6-10MM2 TPBR
 TE Part # 281091-2 FF 375 REC 6-10MM2 TPBR	 TE Part # 160914-2 FF 250 REC 4-6MM2 TPBR	 TE Part # 160914-4 FF 250 REC 4-6MM2 TPPB	 TE Part # 280074-2 FF 375 TAB 6-10MM2 PTBR
 TE Part # 151667-4 FF 375 REC TERMINAL 11-10 AWG PBR	 TE Part # 1-180453-2 FF 312 REC 1-2.5MM2		

Also in the Series | FASTIN-FASTON 375

Crimp Terminal Housings(9)	Insertion & Extraction Tools(1)	Quick Disconnects(19)

Customers Also Bought



TE Part #1-969489-1
6POS MQS REC COD A

TE Part #3371890001
ES-CAP-NO.1-C1-0-30MM

TE Part #770251-3
UMNL II SOK PTPPHBZ LP 20-14

TE Part #280755-2
FF 375 REC 6-10MM2 TPBR

TE Part #1355081-1
MQS RETAINER

TE Part #368501-1
070 MLC PLUG HSG 4P

TE Part #173631-1
MC/O REC CONTACT REEL

TE Part #2328653-1
LANGUETTE 6,3 NG1

TE Part #1310963001
ACW0219-0.50-0(NS)

TE Part #6137703001
ACW0219-0.50-92(NS)

Documents

Product Drawings
FF 375 REC 4-6MM2 TPBR

English

CAD Files
3D PDF

3D

Customer View Model
ENG_CVM_CVM_151667-2_AD.2d_dxf.zip

English

Customer View Model
ENG_CVM_CVM_151667-2_AD.3d_igs.zip

English

Customer View Model
ENG_CVM_CVM_151667-2_AD.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



1654742_HOUSEHOLD_APPLIANCES_RAST5

English

Product Specifications

Application Specification

English