
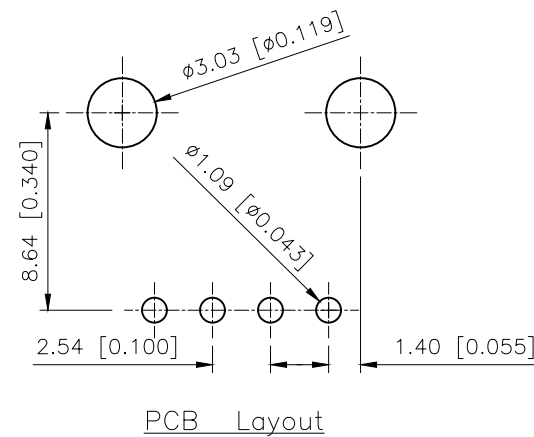
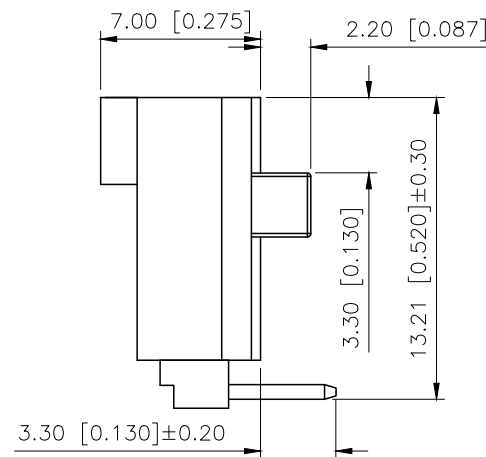
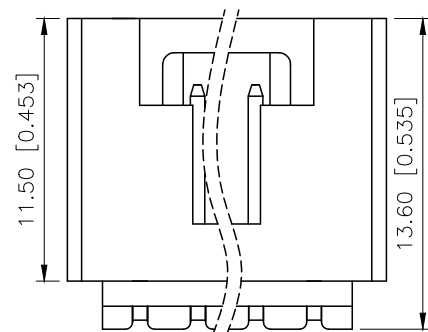
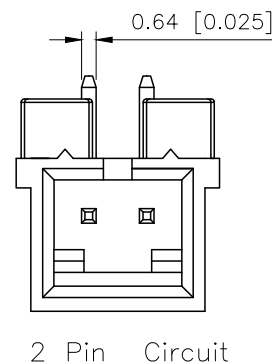
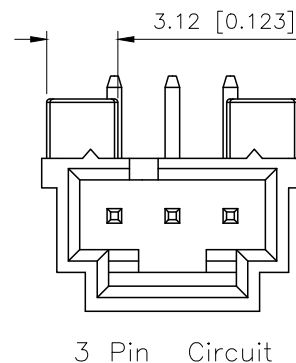


	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.19	阿树

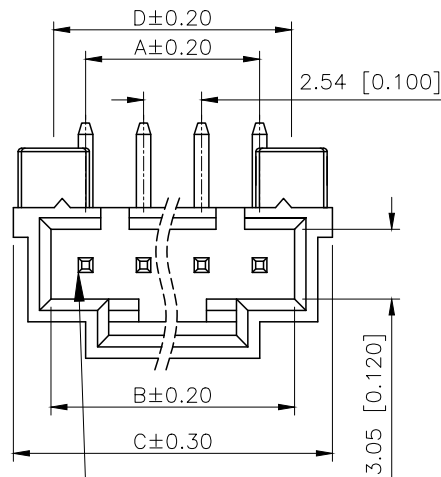

■ SPECIFICATIONS


- Voltage rating:250V AC/DC
- Current rating:3A AC/DC
- Withstanding Voltage:1500V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤20mΩ

PART NO.:

X9556 W R-XX S-9T V01
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
②Category:W—Wafer
③Welding Board Angle:R—Stright 90°
④Row No.Pin No:XX-02~15Pin
⑤Special NO:RB—Reverse bending
⑥Material:9T—PA9T UL94V-0
⑦Planting: V01—Gold Flash

Poles	Dimensions(mm)			
	A	B	C	D
02	2.54	5.58	8.89	5.33
03	5.08	8.13	11.43	7.87
04	7.62	10.67	13.97	10.41
05	10.16	13.21	16.51	12.95
06	12.70	15.75	19.05	15.49
07	15.24	18.29	21.59	18.03
08	17.78	20.83	24.13	20.57
09	20.32	23.37	26.67	23.11
10	22.86	25.91	29.21	25.65
11	25.40	28.45	31.75	28.19
12	27.94	30.99	34.29	30.73

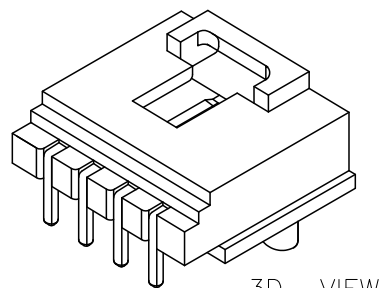

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	

XKLB 星城
Connection

X9556WR-XXS-9TV01	PA9T	X9635W	X9556H
PART NO	Material	Material(Pin)	Suitable XKB Housing

DESIGN	阿树	VIEW: 	MODEL TYPE: 2.54mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X9556WR-XXS-9TV01
APPROVED		SIZE: A4	DWG NO.:

SCALE	PAGE	REVISION
N/A	1/1	A1