



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.07.20	阿 树

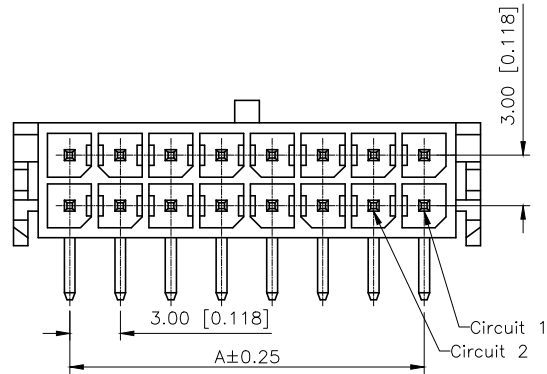

■SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:5A AC/DC
- Withstanding Voltage:1000V AC/minute
- Temperature range:-45°C+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤10mΩ
- After environmental testing: ≤20mΩ

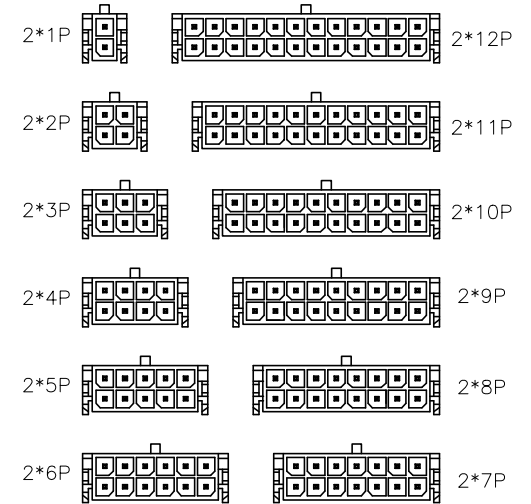



PART NO.:

X3025 W R-2xXX C-LP SN XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

Scale 1:3

- ①Series No
②Category:W-Wafer
③Welding Board Angle:R-Stright 90°
④Row No-Pin No: 2xXX-2x01P~2x12P
⑤Special NO:C-The harpoon
⑥Material:46-PA46 UL94V-0
66-PA66 UL94V-0
LP-LCP UL94V-0
⑦Planting:G*:Gold-Plated Contact *01-2u
SN-Bright tin plating
⑧Color:Blank-natural color

Poles	Dimensions (mm)	
	A	B
2*01	---	6.65
2*02	3.00	9.65
2*03	6.00	12.65
2*04	9.00	15.65
2*05	12.00	18.65
2*06	15.00	21.65
2*07	18.00	24.65
2*08	21.00	27.65
2*09	24.00	30.65
2*10	27.00	33.65
2*11	30.00	36.65
2*12	33.00	39.65

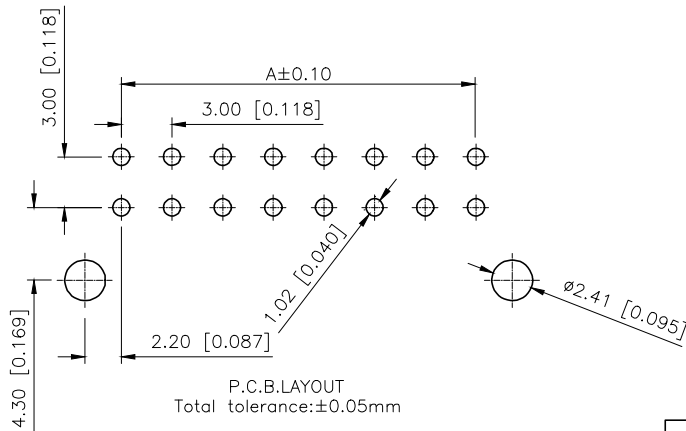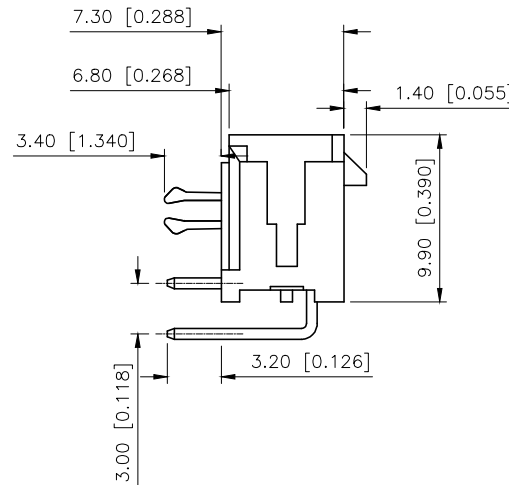

P.C.B.LAYOUT
Total tolerance:±0.05mm

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿 树	VIEW:	MODEL TYPE:
CHECKED		UNIT: mm/in	PART NO.:
APPROVED		SIZE: A4	DWG NO.:

X3025WR-2xXXC-66G02	Nylon 66 UL 94V-0	Brass	Gold flash	X3025H
X3025WR-2xXXC-LPSN	LCP UL 94V-0		Tin-Plated	
X3025WR-2xXXC-46SN	Nylon 46 UL 94V-0			
X3025WR-2xXXC-66SN	Nylon 66 UL 94V-0			
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With XKB Housing

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1