
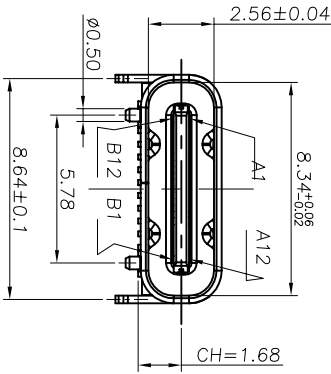

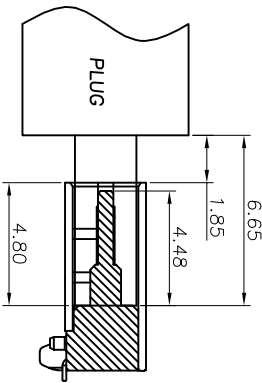



RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS: 0.80MM, DEFAULT TOLERANCE: ±0.05

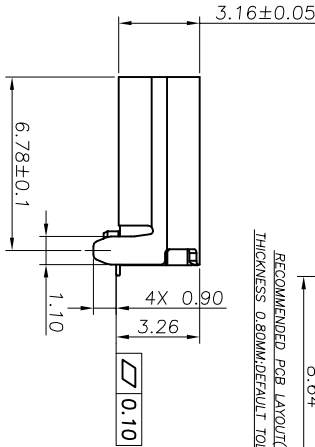

公母对插后尺寸

备注:
1. 材质及电镀: 见附表1

2. 电气性能:

2.1 接触电阻: 30mΩ Max FOR INITIAL.

40mΩ Max AFTER TEST.

2.2 耐电压: 100V AC

2.3 绝缘: 100MΩ Min

2.4 额定电流:

COLLECTIVELY VBUS PIN (A4,A9,B4,B9) ,TOTAL 5A

VCCON PIN (B5) THROUGH GND PIN(A1,A12,B1,B12),1.25A

OTHERS PIN, 0.25A

2.5 工作温度: -40° C ~ 80° C.

3. 机械性能:

3.1 插入力: 5-20N.

3.2 拔出力: 初始值8-20N测试后6-20N

3.3 寿命: 10,000 CYCLES

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SR02
A6	DP1	B7	DP2
A7	DM	B6	CC2
A8	SR01	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

深圳市万骏达电子有限公司
http://www.wanjunda.com

品名 (ITEM NO) TYPE C 16PIN L=7.35MM 后脚

料号 (PART NO) TPC-16P-HT-7.35(3MD)

模号 (MODEL NO)

图号 (DWG NO)
版本 (REV)
日期 (DATE)
设计 (DESIGN)
审核 (CHECKED)
核准 (APPROVED)

单位(UNIT): MM
比例(SCALE)1:1

公差
TOLERANCE UNSPECIFIED
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
X.XX ±0.10
X.X ±0.10
X.X ±0.10