

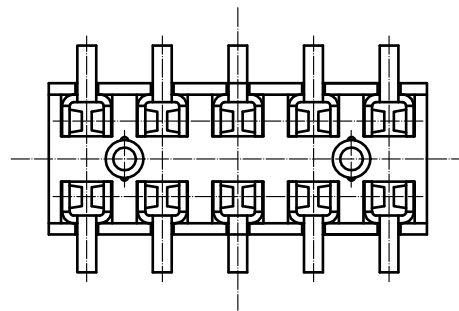
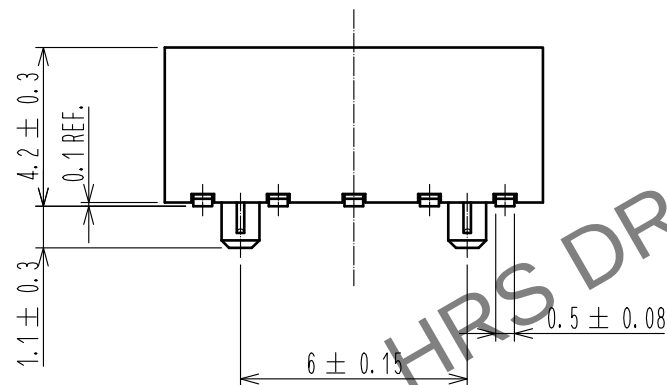
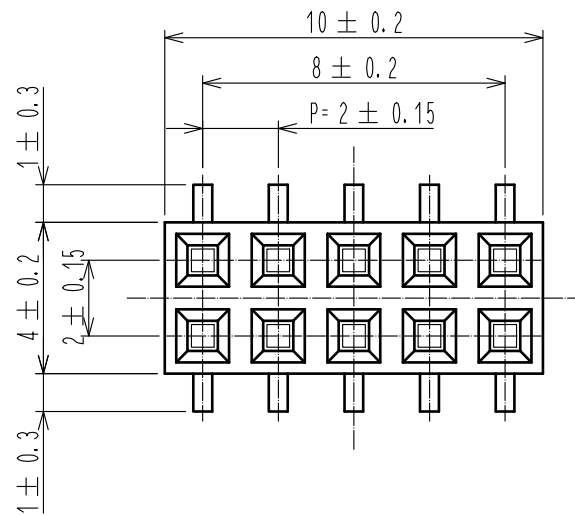



Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

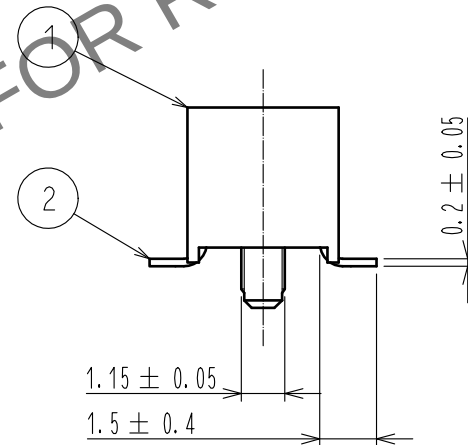

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS:0.2mm)

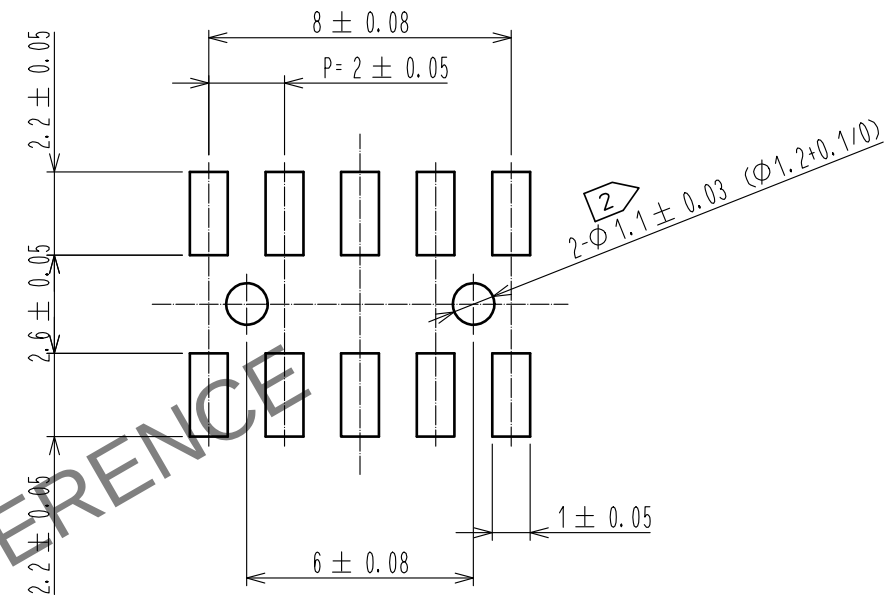

- NOTES 1. LEAD CO-PLANARITY SHALL BE 0.15 MAX.
2 FOR AUTOMATED MOUNTING, RECOMMENDED THROUGH HOLE DIAMETER OF BOSS IS 1.2+0.1/0.

			2		PHOSPHOR BRONZE	CONTACT: GOLD PLATING 0.2μm MIN LEAD : TIN REFLOW PLATING 1μm MIN UNDER : NICKEL PLATING 1μm MIN		
1	POLYPHENYLENE SULFIDE	LIGHT BROWN, UL94V-0						
NO.	MATERIAL	FINISH , REMARKS			NO.	MATERIAL	FINISH , REMARKS	
UNITS mm		SCALE 5:1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		15. 07. 16	DRAWING NO.	EDC-082676-71-21		
		CHECKED : HT. YAMAGUCHI		15. 07. 16	PART NO.	A3A-10DA-2SV(71)		
		DESIGNED : MT. ITANO		15. 07. 16	CODE NO.	CL621-1143-3-71		
		DRAWN : MT. ITANO		15. 07. 16				