



LOC HB	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
			F	1.UPDATE TE LOGO 2.ADD LINE IDENTIFICATION 3.TERMINALS TOLERANCE CLARIFICATION4. VENT HOLE CHANGE	ECO-12-005726	6-APR-12 D.L BH.Y
			G	CHANGE THE VENT HOLE SHAPE FROM RECTANGLE TO CIRCLE ONE	ECO-13-015347	16-DEC-13 XL,Y B,F

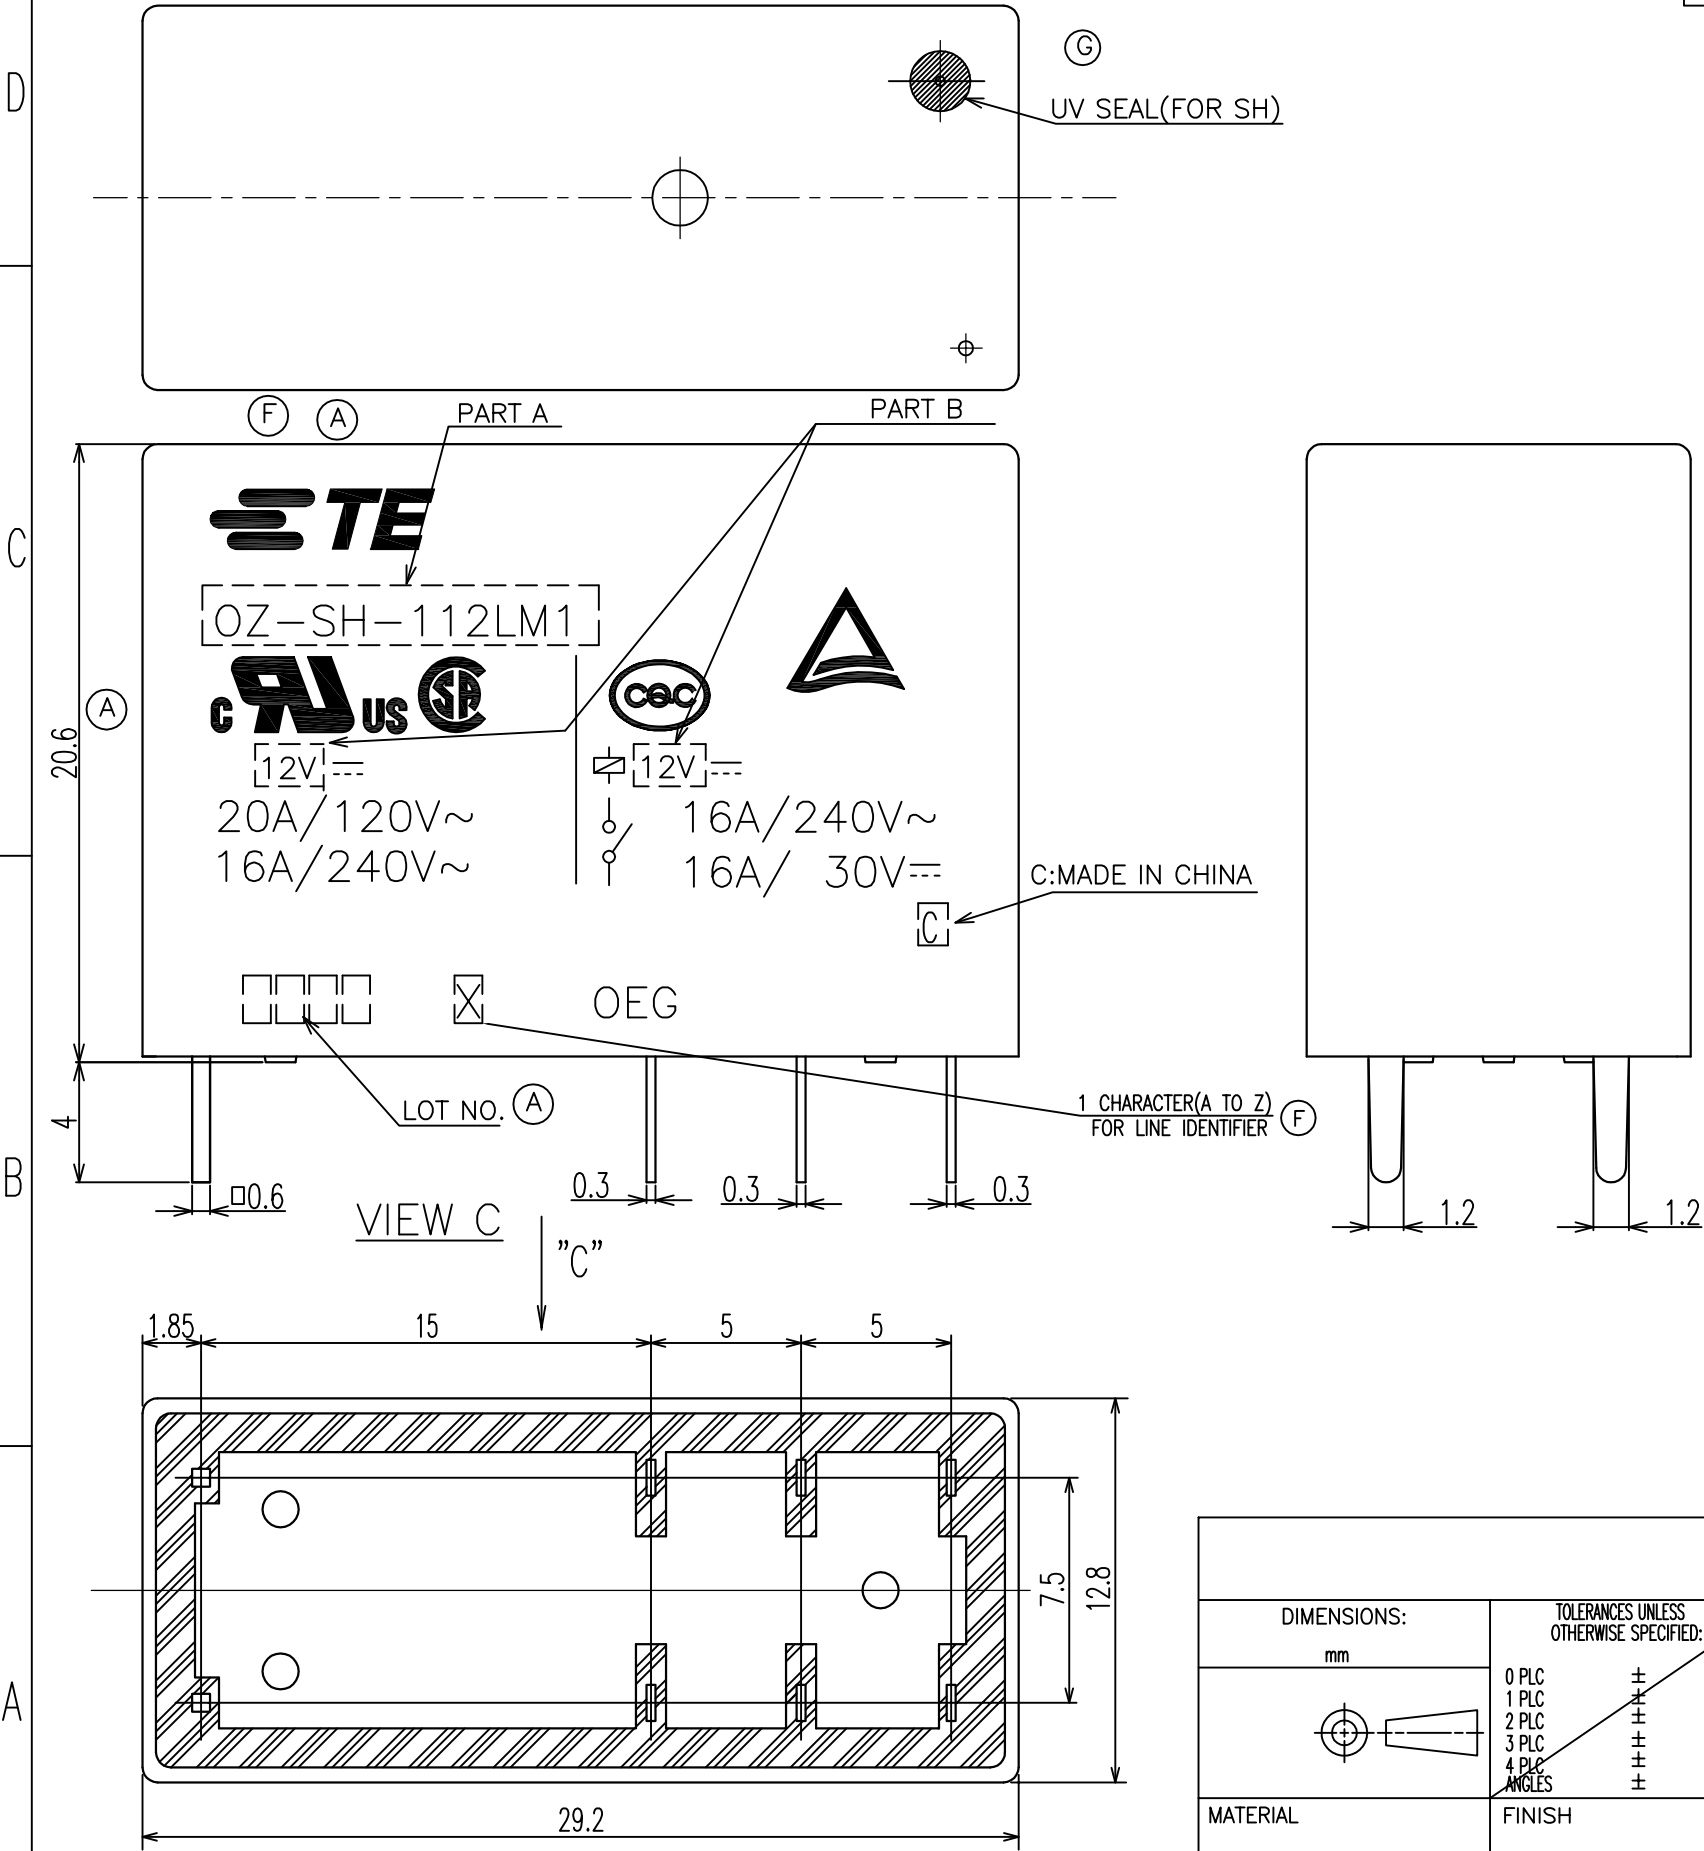


- (A) NOTES:
1.TERMINAL DIMENSION IS NOT INCLUDING SOLDER TIP.
2.LOT NUMBER SYSTEM AS FOLLOWS:



- 3.GENERAL TOLERANCE AS FOLLOWS:

TOLERANCE	
0~0.99mm	±0.1
1mm~2.99mm	±0.2
3mm MIN.	±0.3


- (F) 4.FOR THE TIN-PLATING OF THE PINS:
+0.1mm FOR WIDTH,THICKNESS AND DIAMETER.
+0.5mm FOR LENGTH.

		DWN	SHIMING.CHEN		 TE Connectivity								
		CHK	WAYNE.PENG										
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME								
mm		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		FUNAYAMA.NAOYA		OZ-1T CUSTOMER DRAWING							
				PRODUCT SPEC									
				—									
				APPLICATION SPEC									
				—						—			
MATERIAL		FINISH		WEIGHT	—		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
—		—		—	—		A3	00779	 1440002-4	—			
CUSTOMER DRAWING				SCALE		4 : 1		SHEET		1 OF 2		REV	G


(A1)	1-1440002-1	OZ-SH-124L	24V	OZ-SH-124L
(A1)	1440002-9	OZ-SH-124D	24V	OZ-SH-124D
(A1)	1461252-1	OZ-SH-148L	48V	OZ-SH-148L
(A1)	1440002-6	OZ-SH-112D	12V	OZ-SH-112D
(A1)	1440002-4	OZ-SH-105D	5V	OZ-SH-105D
	1461354-1	OZ-SS-118D	18V	OZ-SS-118D
	3-1440002-1	OZ-SS-148L	48V	OZ-SS-148L
	2-1440002-8	OZ-SS-124L	24V	OZ-SS-124L
	2-1440002-5	OZ-SS-124D	24V	OZ-SS-124D
	2-1440002-3	OZ-SS-112L	12V	OZ-SS-112L
	2-1440002-1	OZ-SS-112D	12V	OZ-SS-112D
	1-1440002-9	OZ-SS-109L	9V	OZ-SS-109L
	1-1440002-8	OZ-SS-109D	9V	OZ-SS-109D
	1-1440002-6	OZ-SS-106L	6V	OZ-SS-106L
	1-1440002-4	OZ-SS-106D	6V	OZ-SS-106D
	1-1440002-3	OZ-SS-105L	5V	OZ-SS-105L
	1-1440002-2	OZ-SS-105D	5V	OZ-SS-105D
	1461717-1	OZ-SH-112L	12V	OZ-SH-112L
	1-1461250-8	OZ-SH-148L	48V	OZ-SH-148L
	1-1461250-6	OZ-SH-148D	48V	OZ-SH-148D
	1-1461250-2	OZ-SH-109L	9V	OZ-SH-109L
	1-1461250-0	OZ-SH-109D	9V	OZ-SH-109D
	0-1461250-8	OZ-SH-106L	6V	OZ-SH-106L
	0-1461250-6	OZ-SH-106D	6V	OZ-SH-106D
	0-1461250-5	OZ-SH-105L	5V	OZ-SH-105L
	0-1461250-3	OZ-SH-105D	5V	OZ-SH-105D
	0-1461250-2	OZ-SH-124L	24V	OZ-SH-124L
	0-1461250-1	OZ-SH-112D	12V	OZ-SH-112D
	0-1440002-7	OZ-SH-112L	12V	OZ-SH-112L
	PART NO	EC TYPE NAME	PART B	PART A


RELAY TYPE

CIRCUIT DIAGRAM(2/1)
(BOTTOM VIEW)

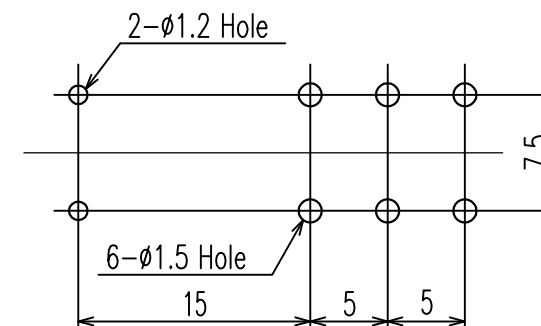

DRILLING DIAGRAM
(BOTTOM VIEW)

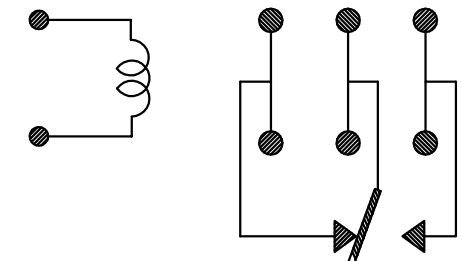

		DWN SHIMING.CHEN	TE Connectivity				
		CHK WAYNE.PENG					
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC± 1 PLC± 2 PLC± 3 PLC± 4 PLC± ANGLES±	APVD FUNAYAMA.NAOYA	NAME OZ-1T CUSTOMER DRAWING				
mm		PRODUCT SPEC —					
		APPLICATION SPEC —					
MATERIAL —		FINISH —	WEIGHT —	SIZE A3	CAGE CODE 00779	DRAWING NO C= 1440002-4	RESTRICTED TO —
		CUSTOMER DRAWING			SCALE 4:1	SHEET 2 OF 2	REV G

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1440002-1](#)