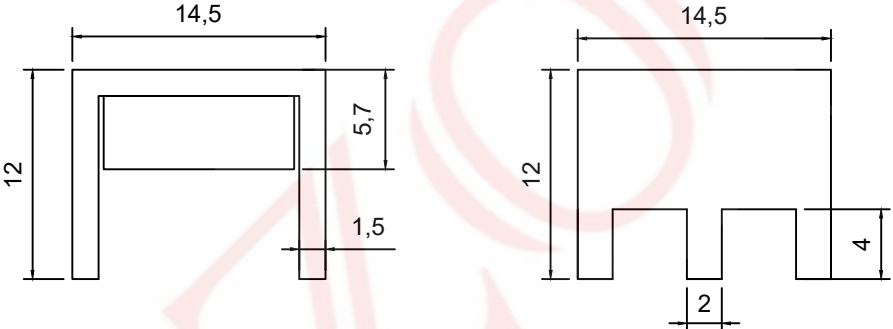
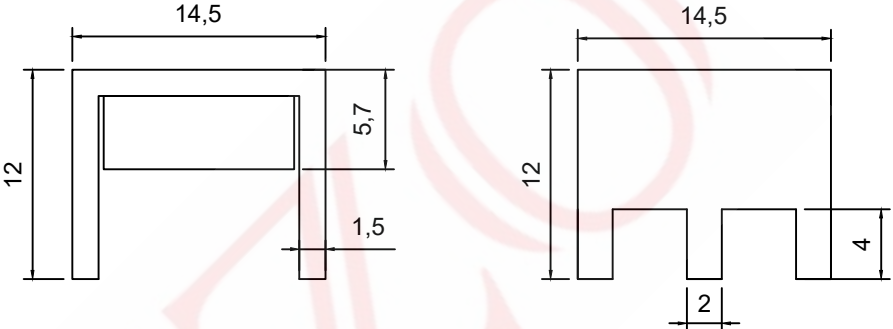
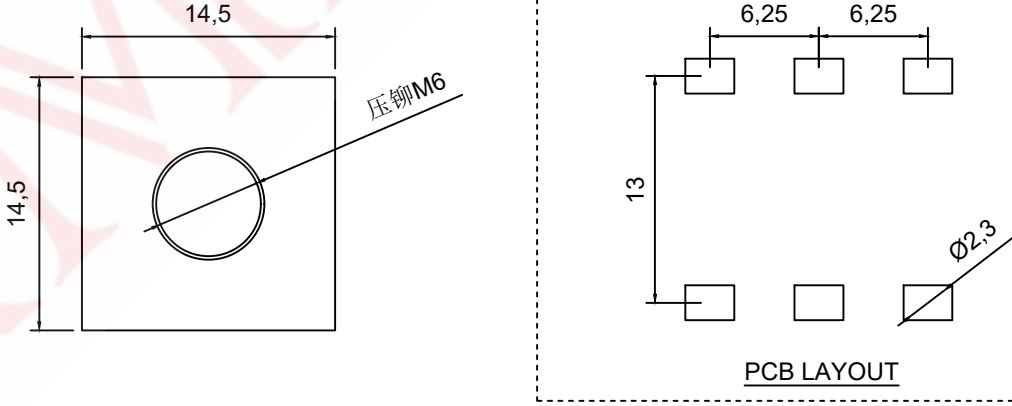



E	1	2	3	4	5	6		7		8	
	SAMZO REAC/ROHS					REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
						A1	NEW	Replace frame			2013.02.12
D	技术要求: Technical requirements: 1.打铜底0.5-1UM,镍底2-2.5UM,哑锡3-5UM。 Copper base 0.5 - 1 UM, nickel base 2 - 2.5 UM, matte tin 3 - 5 UM. 2.不得有脚变形, 毛刺等缺陷。 There shall be no defects such as pin deformation and burrs. 3.插脚尖部符合可焊性要求。 The tip of the insertion pin shall meet the solderability requirements. 4.螺纹需符合通止规要求。 The thread shall meet the requirements of the go and no-go gauge. 5.材质: 紫铜T2。 Material: Red copper T2. 6.过载电流: 120A Overload current:120A 7.牙孔规格 M6 The specification of the threaded hole M6 8.未标注尺寸公差值按GB/T1184-1996H级 Unmarked dimensional tolerance values are in accordance with Grade H of GB/T1184-1996 9.螺丝扭力: 6.0Nm Screw torque: 6.0Nm 10.盐雾试验: 48小时 Salt spray test: 48H										
C											
B	145 80 40 T Y6 Pressing hole specification: M6 Mold number: CST2-059 Pin height: 4.0mm Height above the board: 8.0mm Specification size:14.5*14.5mm										
A	ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COLOR					FIRST VIEW	
	A	Subject	H62(Y2)	1	tin plating						
	A	Gasket	SPCC	1	tin plating					The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM	
						GENERAL TOLERANCE				TITLE: 14.5*14.5*12mm	
						≥0~2<	±0.15	SCALE	1:1	UNIT	mm
						≥2~5<	±0.25	SAMZO COMPONENTS			
A						CHECKED	ZHENGUILAN	2018.06.12	≥0~2<	±0.15	Electronic switch and connector manufacturer
						APPROVED	LILIANJIANG	2018.06.14	≥5	±0.35	
	F										
	1	2	3	4	5	6	7	8			