

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

Series: SMD Helical Antenna





Features:

- 860-930MHz
- Impedance 50 Ohm
- · Plastic support helical antenna
- Size(helix): Length 29.5mm,
- Gain 1.5dBi
- SMD Mounting on PCB
- RoHS Compliant

Applications:

- 868MHz and 915MHz ISM Band Systems
- IoT systems
- Metering, Automation
- Security, surveillance
- · Remote controls, toys

All dimensions are in mm / inches

Issue: 1748

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

Series: SMD Helical Antenna

ELECTRICAL SPECIFICATIONS

Antenna Type	Helical
--------------	---------

Frequency 860-930MHz

Nominal Impedance 50 Ω

VSWR Max 2.5

Radiation Pattern Omni

Gain 2 dBi

Efficiency 50%

Polarization Linear

Power Withstanding 2W

MECHANICAL SPECIFICATIONS

Overall Length 29.5mm

Weight 2.52g

Antenna Color / Material White

Fix system SMD+Glue

Recommended Glue Resinlab EP1320LV Black

Solder Paste Thickness Min 0.15mm

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature -40° C~+85 ° C

Storage Temperature -40 ° C ~+85° C

RoHS Compliant Yes


OTHER SPECIFICATIONS



Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

Series: SMD Helical Antenna

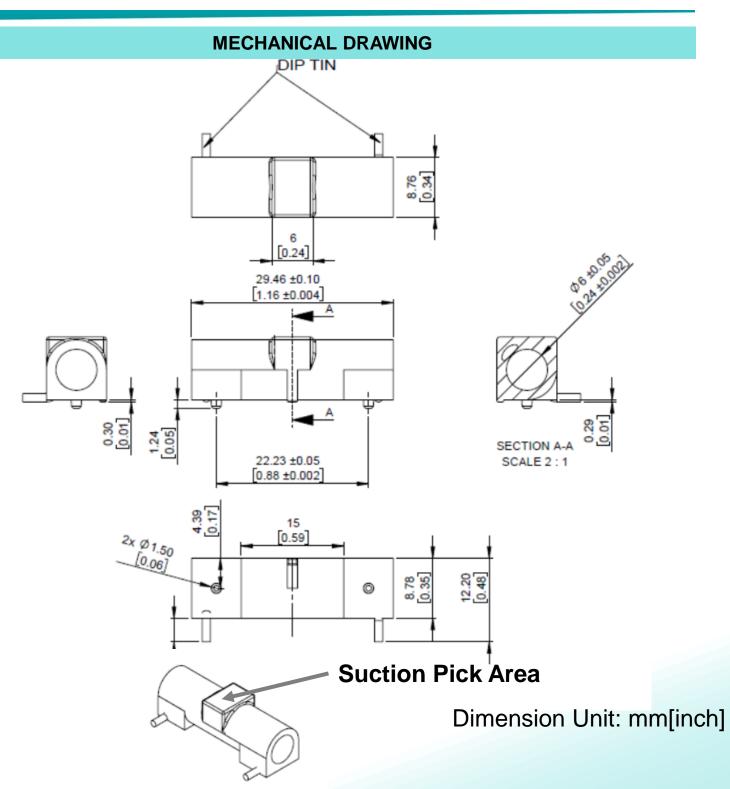

Issue: 1748





Description: 860-930MHz Embedded Helical Antenna


PART NUMBER: W3136

Series: SMD Helical Antenna

FIX SYSTEM RECOMMENDATION

Fix system

- 1. SMD process
- 2. Solder paste thickness: minimum 0.15mm
- 3. Glue is required, Recommended Glue: Resinlab EP1320LV Black, usage and position see below recommended area.

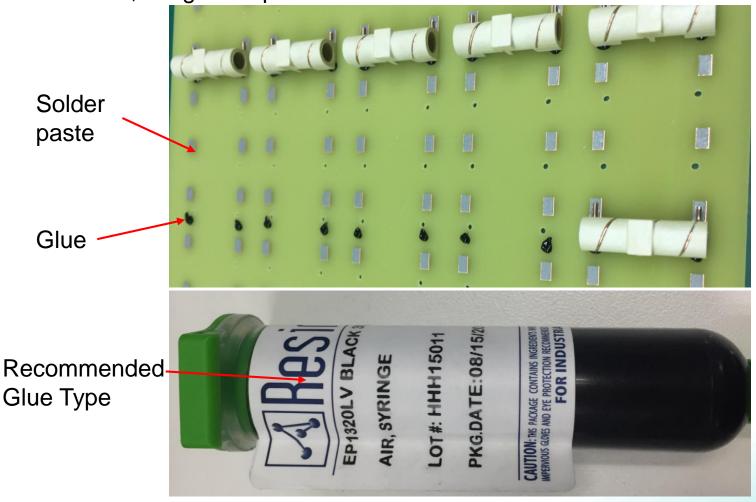







Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136


Series: SMD Helical Antenna

FIX SYSTEM RECOMMENDATION

Fix system

1. Glue position on PCB for recommendation

Glue position on PCB for recommendation

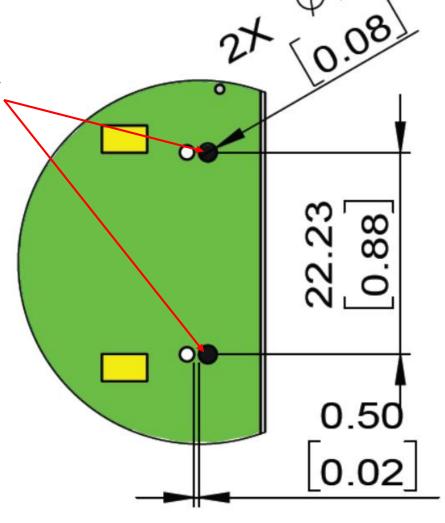



Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

Series: SMD Helical Antenna

FIX SYSTEM RECOMMENDATION Solder effect Back view of glue area

Issue: 1748




Description: 860-930MHz Embedded Helical Antenna


PART NUMBER: W3136

Series: SMD Helical Antenna

TEST SETUP

PWB Layout for W3136 SMD Helical Antenna

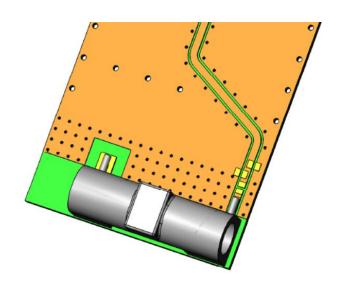

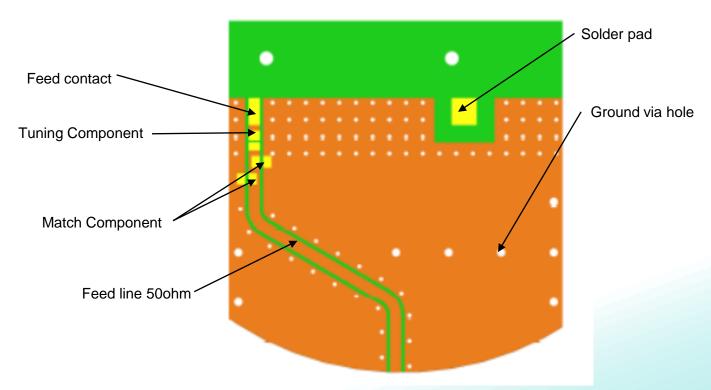

Issue: 1748

ROHS




Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

Series: SMD Helical Antenna

TEST SETUP

PWB ground clearance area (Top):40x9.5mm PWB ground clearance area (Bottom):40x9.5mm

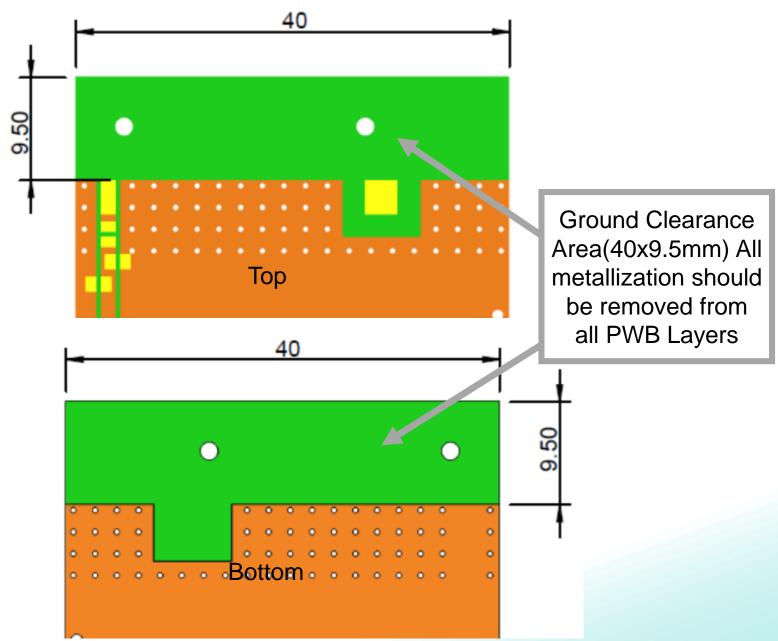

Issue: 1748

ROHS




Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

Series: SMD Helical Antenna

TEST SETUP

PWB Pad dimension in top copper

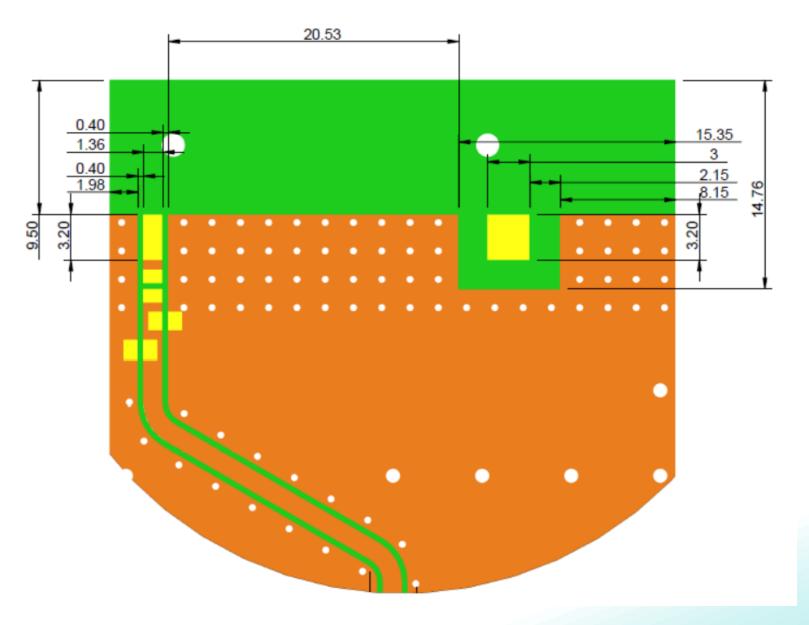






Description: 860-930MHz Embedded Helical Antenna


PART NUMBER: W3136

Series: SMD Helical Antenna

TEST SETUP

PWB Layout, Pulse PWB size:121x40mm, Thickness 1.0mm, other size boards can be used depending on customer size.

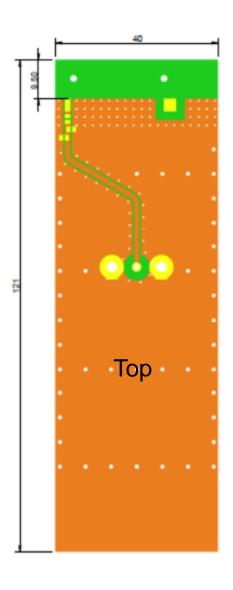

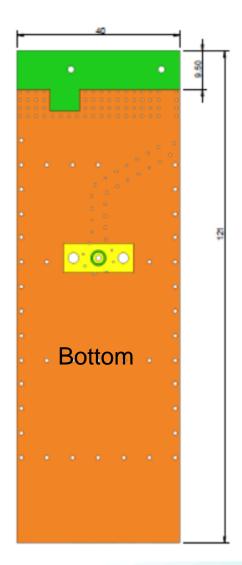




Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

Series: SMD Helical Antenna

TEST SETUP

PWB Layout, Pulse PWB size:121x40mm, Thickness 1.0mm, other size boards can be used depending on customer size.

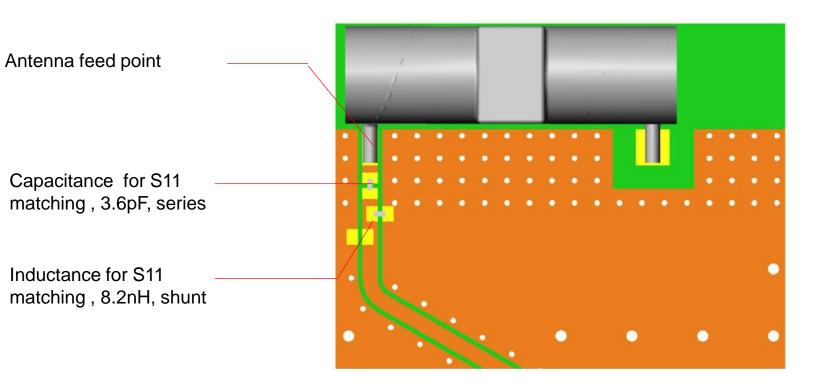

Note: Exact matching and tuning components value depend on application, board size, cover etc.




Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

Series: SMD Helical Antenna

CHARTS

Measured on the 121x40mm test board with tuning and matching circuit

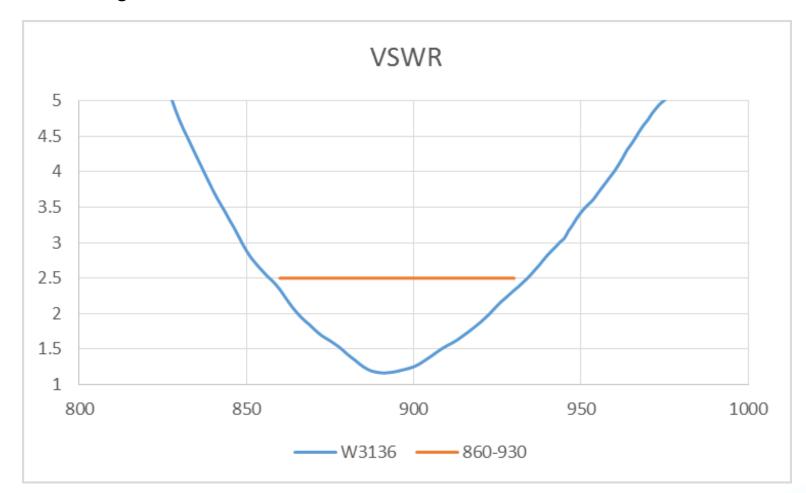






Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

Series: SMD Helical Antenna

CHARTS

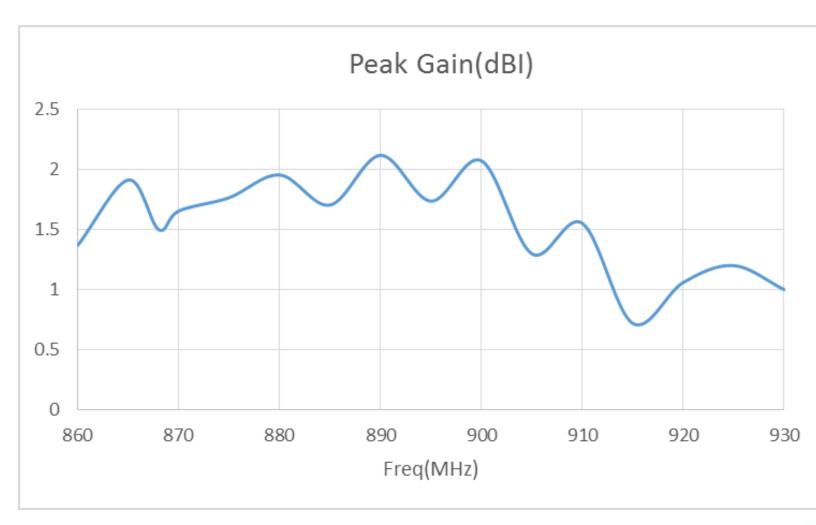




Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

Series: SMD Helical Antenna

CHARTS

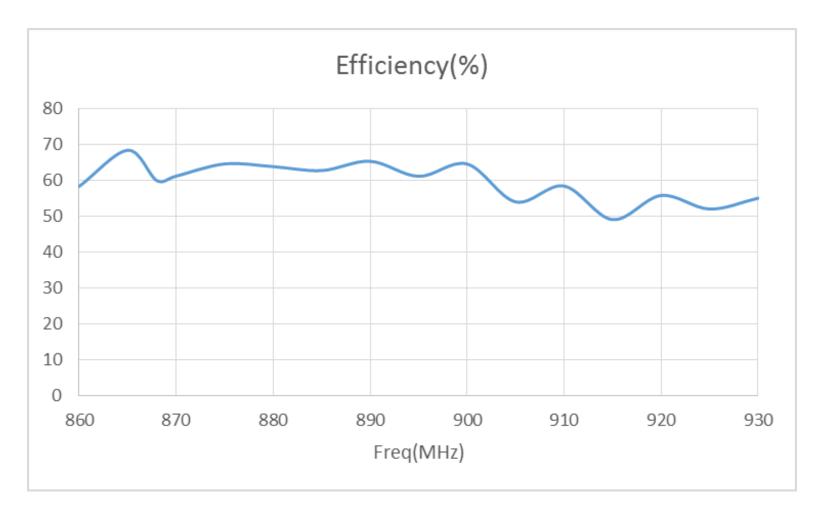




Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

Series: SMD Helical Antenna

CHARTS

Typical radiation pattern in free space

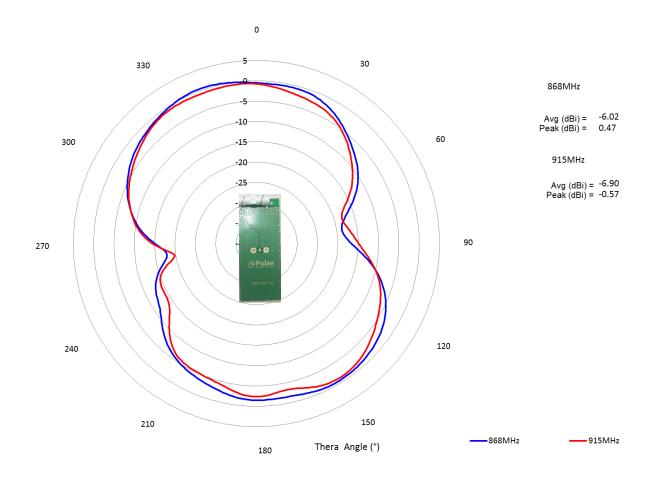




Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

Series: SMD Helical Antenna

CHARTS

Typical radiation pattern in free space

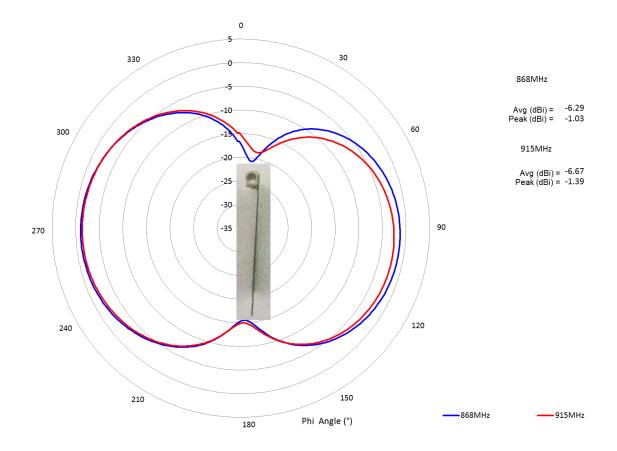



Description: 860-930MHz Embedded Helical Antenna


PART NUMBER: W3136

Series: SMD Helical Antenna

Recommendation for reflow soldering process

Printing stencil thickness 0,15 - 0,25 mm is recommended for the solder paste. The maximum soldering temperature should not exceed 260°C. The temperature profile recommendations for reflow soldering process is presented in the Figures 1 and 2. The reflow profile presented in figure 1 describes minimum reflow temperatures. The reflow profile presented in figure 2 describes maximum reflow temperatures. located at the center of the coverage area.

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 30 sec
5	Peak temperature in reflow	230 ℃ for 10 seconds
6	Temperature gradient in cooling	Max -5 °C/s

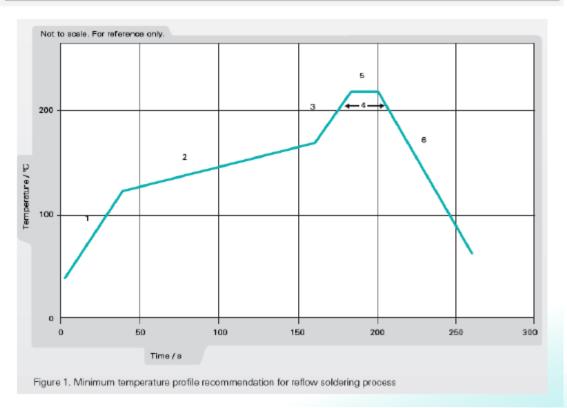



Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

Series: SMD Helical Antenna

Recommendation for reflow soldering process

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 60 sec
5	Time above 230 °C	Max 50 sec
6	Time above 250 °C	Max 10 sec
7	Peak temperature in reflow	260 ℃ for 5 seconds
8	Temperature gradient in cooling	Max -5 °C/s

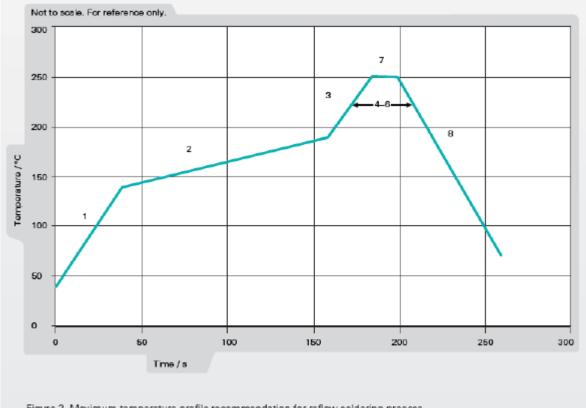


Figure 2. Maximum temperature profile recommendation for reflow soldering process





Description: 860-930MHz Embedded Helical Antenna


PART NUMBER: W3136


Series: SMD Helical Antenna

PACKAGING

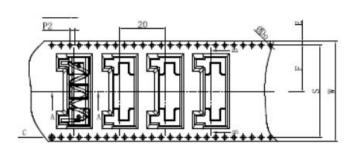







All the size design with reference to the EIA - 481 - C - 2003.

6. Loading within 250 mm length maximum curvature is less than



230PCS

13"/44

200PCS

Total PCS

Package Q

Reel

+ / - 0.2 mm. 2. Material specifications: PS black antistatic, thickness of Manufacture Data

> 3.13 inches (100) axis reel package length: 4.6 m. (the front air bag length: 0.33 m, parts packing length: 4 m, after a period of empty packet length: 0.33

4.13 inches (100) axis reel packaging components to the total number of stars: 230, (the front air bag star count: 15, actual packing parts the number: 200, after a period of empty bag star

Total 200 PCS In Reel

Reel Size: 330MM[13INCH]

Total 2 PCS Reel In Package Box

Package Box Size:350x350x120mm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse: