
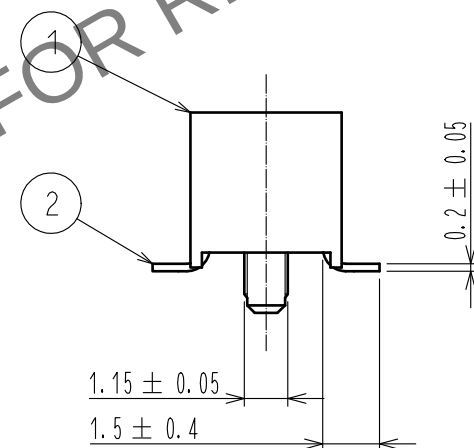
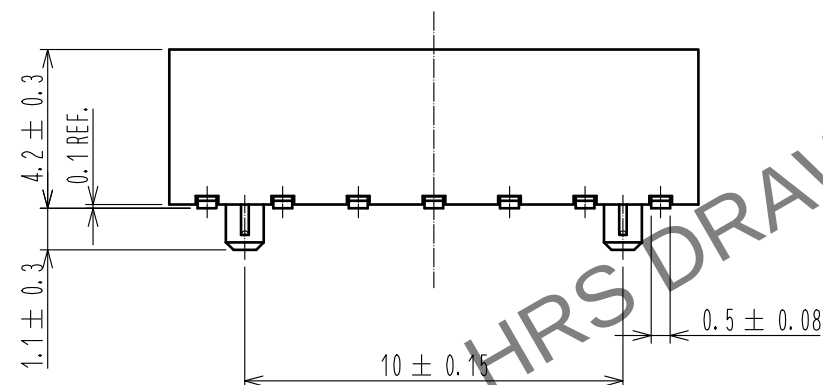
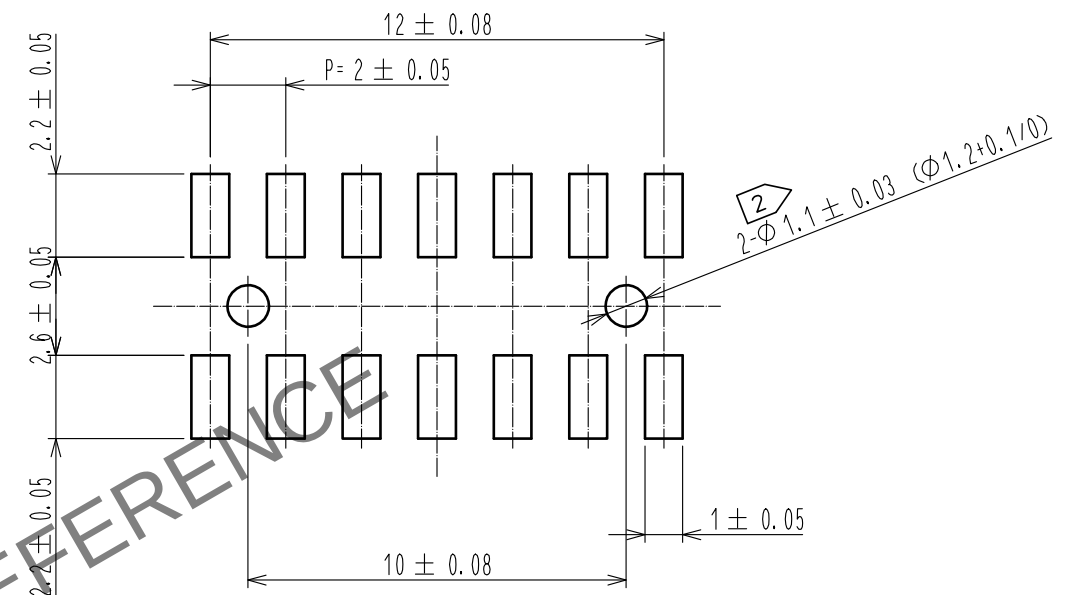


RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS:0.2mm)

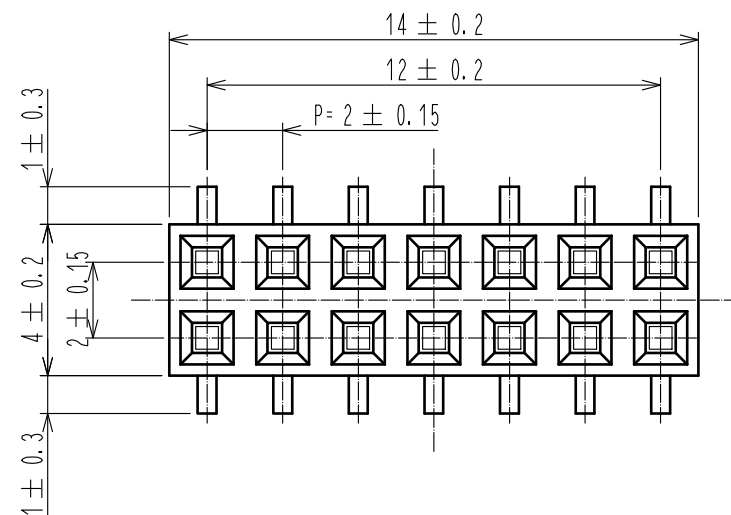

NOTES 1. LEAD CO-PLANARITY SHALL BE 0.15 MAX.
2. FOR AUTOMATED MOUNTING, RECOMMENDED THROUGH HOLE DIAMETER OF BOSS IS 1.2+0.1/0.

				2		PHOSPHOR BRONZE		CONTACT : GOLD PLATING 0.2μm MIN LEAD : TIN REFLOW PLATING 1μm MIN UNDER : NICKEL PLATING 1μm MIN	
1	POLYPHENYLENE SULFIDE	LIGHT BROWN, UL94V-0							
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 5:1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		15. 07. 16	DRAWING NO. EDC-082678-71-21				
		CHECKED : HT. YAMAGUCHI		15. 07. 16	PART NO. A3A-14DA-2SV(71)				
		DESIGNED : MT. ITANO		15. 07. 16	CODE NO. CL621-1145-9-71				
		DRAWN : MT. ITANO		15. 07. 16					