
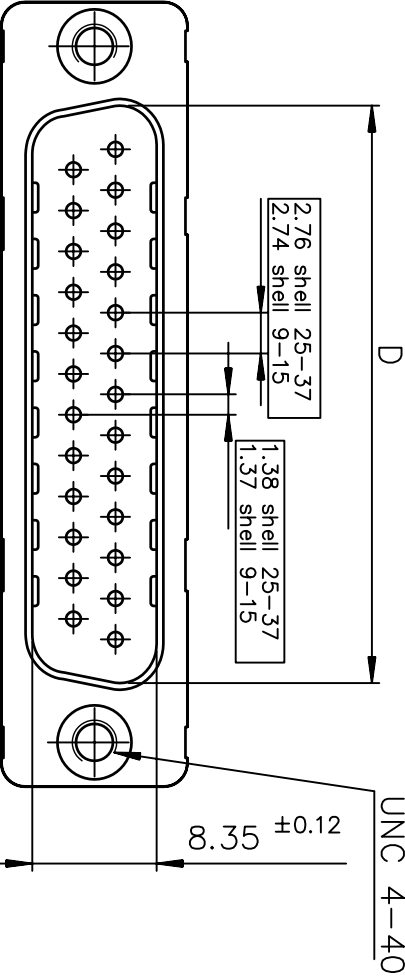


PC card drilling dimensions(after plating) _____
(thickness 1.60±0.20mm)

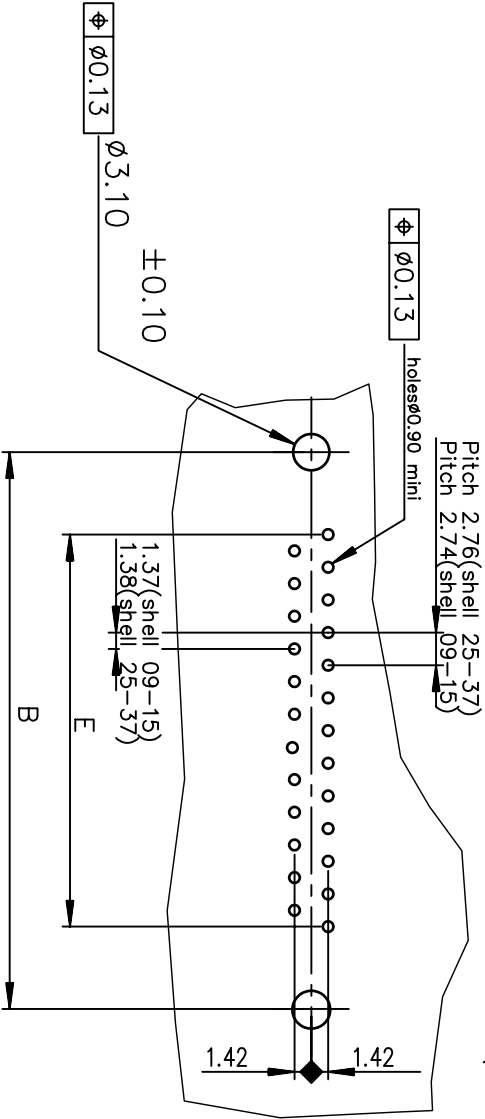

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A.PV00
15	39.14	33.32	25.18	25.12	19.18	D15P24A.PV00
25	53.03	47.04	39.12	38.84	33.12	D25P24A.PV00
37	69.32	63.50	55.68	55.30	49.68	D37P24A.PV00

Plating: 4 ---> flash AU
Plating: 6 ---> 0.76» AU

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A.PV00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24A.PV00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24A.PV00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24A.PV00LF

Plating: 4 ---> flash AU
Plating: 6 ---> 0.76» AU

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

www.fciconnect.com				surface	ISO 1302	tolerance std	ISO 406 ISO 1101	projection	mm	Scale
				TOLERANCES UNLESS OTHERWISE SPECIFIED						2
Dr	LELEON	1992-09-14	ANGULAR	LINEAR		0.X	±0.1	size	A3	
Eng	PESSON	1992-09-14		0.XX		±0.1		ECN	109-0268	
Chr	NIRMAL GEORGE	2009-11-24	0.XX' ±2"	Product family		±0.1		Spec ref	-	
Appr	SUDHIR VARMA	2009-11-24		D-SUB						
rev	ecn no	dr	date							
C	-	JAR	2002/09/10							
D	LS05-001	MPE	2005/03/09							
E	LS05-0056	MPE	2005/06/27							
F	LS06-0097	LGO	2006/07/29							
G	109-0268	NG	2009-11-24							
-	-	-	-							

		MALE CONNECTOR DELTA D ST		Rev.
straight,solder type for		C01-8646-0098		G
catalog no		CUSTOMER		sheet 1 of 1



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[D09P24A6PV00LF](#) [D37P24A4PV00LF](#)