
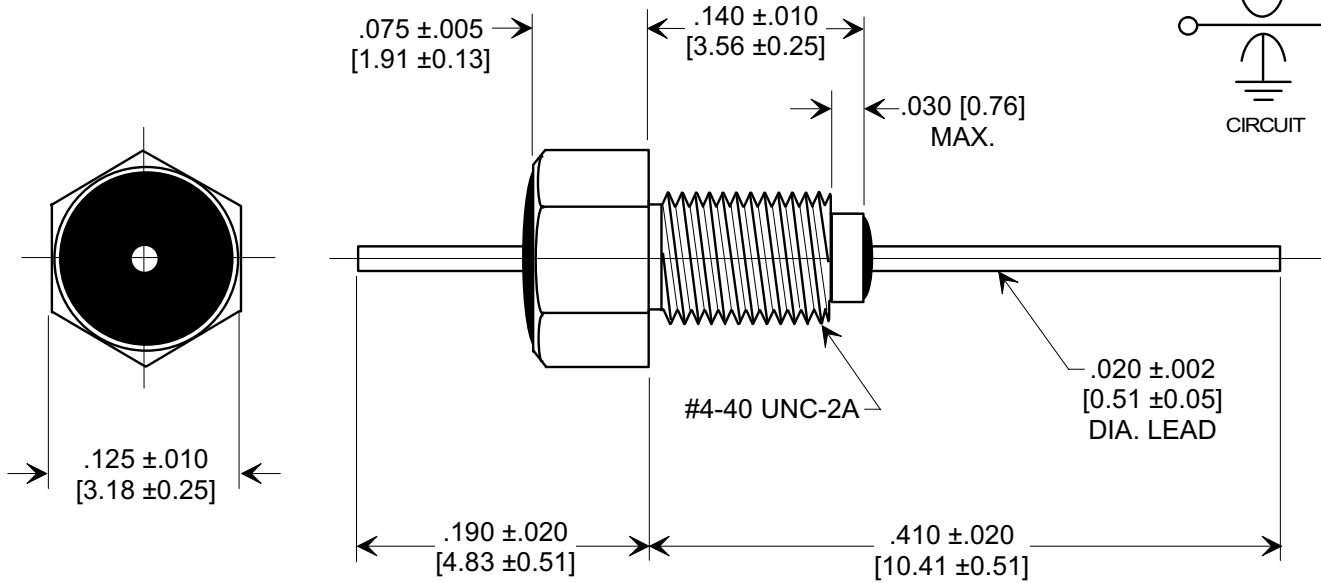




MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.



MOUNTING HARDWARE

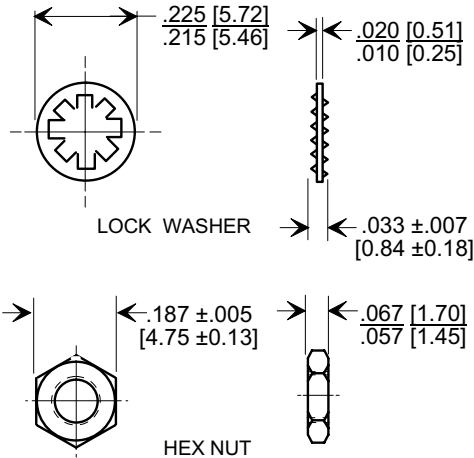

NOTES:

1. OPERATING TEMPERATURE RANGE: -55°C TO +125°C.
2. SILVER PLATED CASE, LEAD AND MOUNTING HARDWARE.
3. MAX. RECOMMENDED MOUNTING TORQUE : 2.0 lb. - in.
4. MAX. RECOMMENDED SOLDERING TEMPERATURE : 260°C.
SEE INSTALLATION RECOMMENDATIONS.
5. NUT AND LOCKWASHER INCLUDED.
6. TUSONIX TRADEMARK AND PART VARIATION NUMBER
STAMPED ON HEX FLATS.

10	GMV	300	200	10	----	----	----	5	20
CAP.(pf)	TOLERANCE	+85 °C	+125 °C	DC CURRENT (AMPS)	1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
		DC WORKING VOLTAGE			MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220				

REVISION RECORD	Original Release C.O. 6963	0	-010; DC WAS 5; E.C. 11-20-92 RDN TO COMP FMT. S.M. 07-16-02 20020715-1-19		--TOLERANCES-- Unless Otherwise Specified	Title MINI BUSHING STYLE EMI FILTER			
		1			DECIMAL ±	NOTED			
					ANGLES ±	NOTED	Drawn	S.M. 06-11-02	Scale 8 X
					TUSONIX TUCSON, ARIZONA			Approved J.Mc. 06-11-02	
								A	4403-008

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tusonix / CTS:](#)

[4403-008](#)