



Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings



Terminal Type: **Receptacle**
Connector & Housing Type: **Receptacle**
Number of Positions: **4**
Terminal Orientation: **Straight**
Primary Product Color: **Natural**

Features

Product Type Features

Sealable	No
Connector & Housing Type	Receptacle

Configuration Features

Number of Positions	4
---------------------	---

Body Features

Primary Product Color	Natural
-----------------------	---------

Contact Features

Terminal Type	Receptacle
Terminal Orientation	Straight
Contact Mating Retention	With

Mechanical Attachment

Mating Retention Type	Latch
Mating Alignment	With



Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Housing Features

Housing Material	Polyamide
Centerline (Pitch)	5 mm[.196 in]

Dimensions

Product Length	18 mm[.708 in]
----------------	----------------

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Packaging Features

Packaging Quantity	10000
--------------------	-------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 626056-4
FASTIN-ON .110 HOUSING REC
PRETO/BLACK

TE Part # 925015-1
FF 110 REC HSG 3P NYLON BLACK

TE Part # 626056-5
FASTIN-ON .110 HOUSING
RECEPTACLE RED

TE Part # 881507-9
FASTIN-ON 2.8,TERMINAL,FAM SLD
/UNSLD,CB

Also in the Series | FASTIN-FASTON 110

Automotive Housings(6)

Automotive Terminals(5)

Crimp Terminal Housings(34)

Insertion & Extraction Tools(3)

Quick Disconnects(83)

Customers Also Bought

TE Part #6609069-4
25FC10 J0=F7750

TE Part #207603-1
METRIMATE,STR REL KIT,18P

TE Part #350551-6
UMNL SOK 20-14 AU/PHBZ L/P

TE Part #626065
2 P FASTIN-ON 110 HOUSING TAB
PA66 NAT




TE Part #5677784003
RNF-3000-6/2-6-SP




TE Part #928906-2
FF 110 TAB 20-15 AWG .016 TPPB



TE Part #880651-2
RING TONGUE 1.0-2.5 MM2 0.60X14.60 TPBR

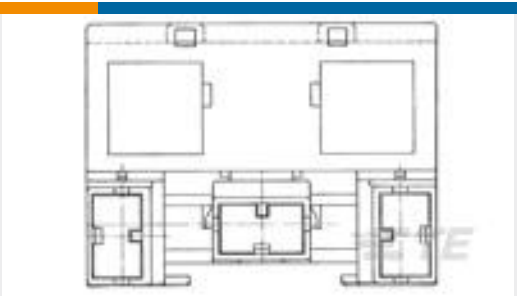

TE Part #927422-1
POSITIVE LOCK 3P HOUSING PA6.6 BLACK

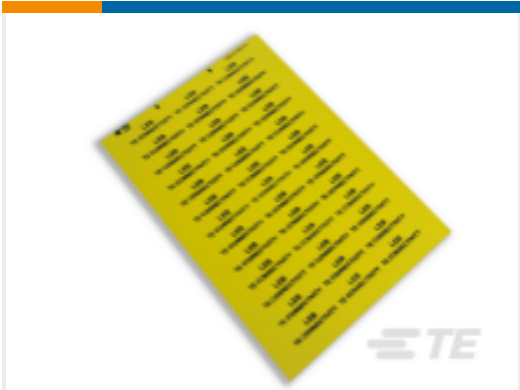

TE Part #3-1768034-2
LEB-3460P-8A

Documents

Product Drawings

FASTIN-ON 110 HOUSING REC PA66 NATURAL

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_626056_J_c-626056-j.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_626056_J_c-626056-j.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_626056_J_c-626056-j.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

FASTIN_FASTON_Product_Line

English

White Paper: Nylon Discoloration

English

Product Specifications

Application Specification

English

626056

Receptacle, Receptacle, 4 Position, Straight, Natural, Polyamide, Contact Mating Retention, FASTIN-FASTON 110, Crimp Terminal Housings

