

FO-55111-A

4

3

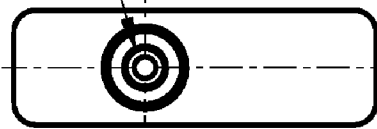
HONEYWELL
PART NUMBER

11SM8849-H58

PRODUCT CODE

TWZ5250

PLASTIC PLUNGER

.020 MAX
PRETRAVEL.33
OPERATING
POSITION.088^{+.002}_{-.001}.098^{+.002}_{-.004} DIA

.250±.010

.342±.010

.296±.010

.156±.010 DIA

.302±.010

.088^{+.002}_{-.001} DIA HOLE

.203±.010

.781±.010

.090±.010

.260±.010

.046 SP

.092

.356±.010

.24

.0

RE

CHARACTERISTICS

4

OPERATING FORCE — — — — 3-5 OZ

RELEASE FORCE — — — — 1 OZ MIN

DIFFERENTIAL TRAVEL — — — .004 MAX

OVERTRAVEL — — — — .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

SEA LEVEL

50,000 FT

INDUCTIVE

3 AMP

2.5 AMP

RESISTIVE

5 AMP

5 AMP

MAXIMUM INRUSH 24 AMP

APPROVALS

KEMA, CE

5A, 250V ~ T85 1E4

05

CE

UL, CSA

5A, 250 VAC

UL

CE

BRAND

L4

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE X ±

ONE PLACE .X ±

TWO PLACE .XX ±

THREE PLACE .XXX ±

FOUR PLACE .XXXX ±

ANGLES ±

THIRD ANGLE PROJ.



4

3