




SPLICE

TE Internal #: 1438254-1
Splice Accessory, 0 Serration, Length 7.62 mm [.3 in], Strip, Open,
Solid / Stranded Wire, Discrete Wire, Uninsulated, SPLICE, Splices
[View on TE.com >](#)

Terminals & Splices > Splices

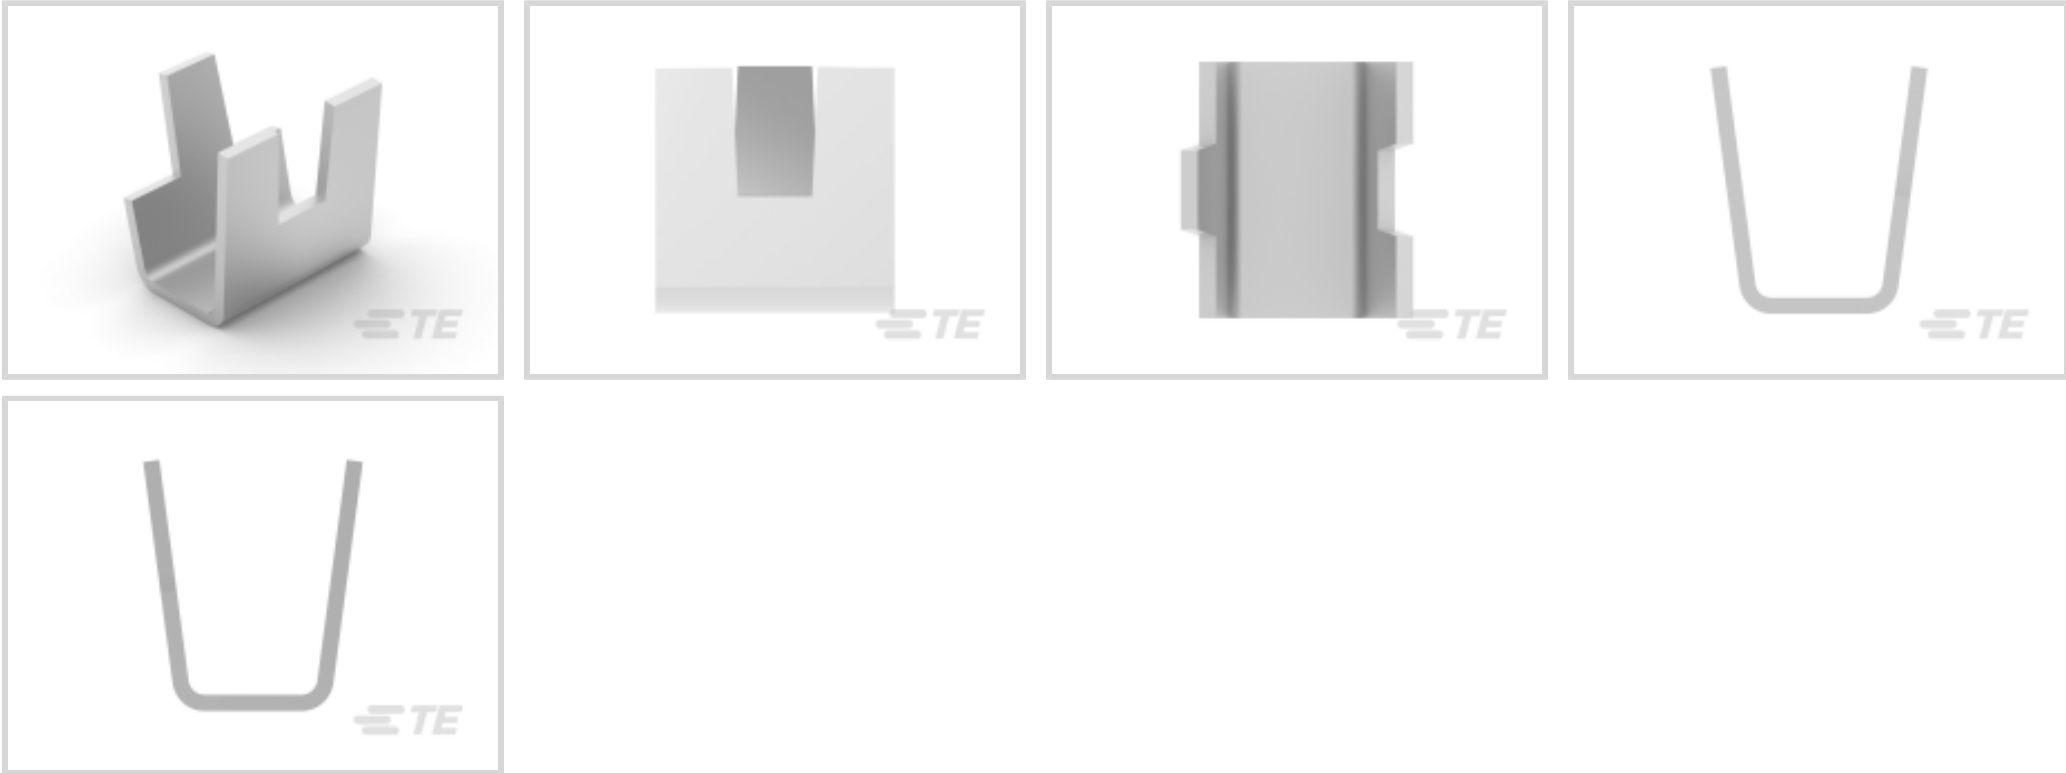

Splice Type: **Splice Accessory**
Sealable: **No**
Compatible Insulation Diameter Range: **5.97 mm [.235 in]**
Terminal Material Thickness: **.51 mm [.02 in]**
Number of Serrations: **0**

Features

Product Type Features

Splice Type	Splice Accessory
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Insulation Support

Configuration Features

Number of Serrations	0
Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Barrel Type	Open
-------------	------

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions

Compatible Insulation Diameter Range	5.97 mm[.235 in]
Terminal Material Thickness	.51 mm[.02 in]



Product Length	7.62 mm[.3 in]
----------------	----------------

Usage Conditions

Insulation Option	Uninsulated
-------------------	-------------

Industry Standards

Government Qualified Splice	No
-----------------------------	----

Packaging Features

Packaging Quantity	15000
Packaging Method	Strip

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Also in the Series | SPLICE



Crimp Wire Pins, Tabs & Ferrules(1)



Splices(64)

Customers Also Bought



TE Part #HDP24-24-23SE
DEUTSCH HDP20 Housings




TE Part #HDC26-24
DUST CAP, 24SZ, REC, BLK, HDP



TE Part #DT06-3S
PLG, 3P, GRY, N



TE Part #W3S-1939
WEDGE LOCK, 3P, PLG, BLU, STD, J1939, DT

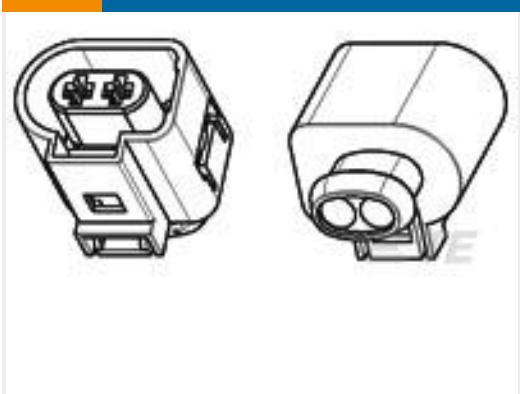

TE Part #1-967412-2
JPT GEH ASSY 2P



TE Part #280755-4
FF 375 REC 6-10MM2 TPPB



TE Part #8509970001
SAS-115-1-1017-1X



TE Part #2098377-2
20P PLUG ASSEMBLY UNSEALED HYBRID B-KEY

Documents

Product Drawings

ID BAND .020 AL

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1438254-1_D_c-1438254-1-d.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1438254-1_D_c-1438254-1-d.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1438254-1_D_c-1438254-1-d.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

1438254-1

Splice Accessory, 0 Serration, Length 7.62 mm [.3 in], Strip, Open, Solid / Stranded Wire, Discrete Wire, Uninsulated, SPLICE, Splices

