
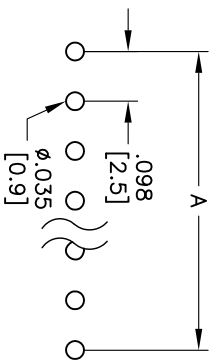
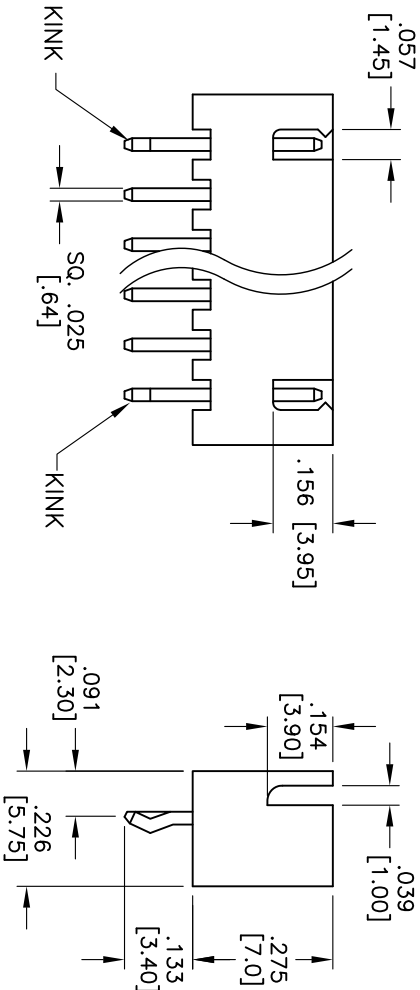


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/13/06	
A		PART REVISION	4/19/06	
B		ADDED DIM.	8/11/09	

APPROVED: _____
 DATE: _____ TITLE: _____

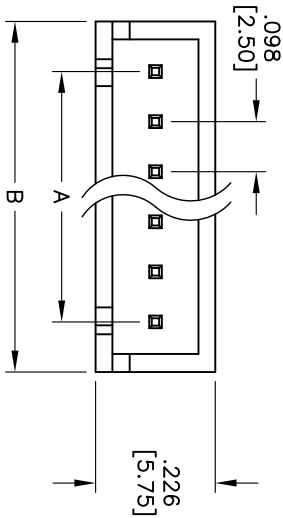

RECOMMENDED PCB LAYOUT

Positions: 2 thru 20
 A = .098 [2.50] x No. of Spaces
 B = .098 [2.50] x No. of Spaces + .196 [5.0]

SPECIFICATIONS:
 Material: Nylon 66 UL 94V-0, White
 Insulator: Nylon 66 UL 94V-0, White
 Contact: Brass
 Plating:
 Tin over Copper underplate overall
 Electrical:
 Operating voltage: 250 VAC max
 Current rating: 3 Amp max
 Contact Resistance: 10M ohms max
 Insulation resistance: 1,000Mohms min.
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

WIRE TO BOARD PITCH: 2.5MM
 WAFER STRAIGHT TYPE W/ KINK

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				TITLE			
INCHES				HOLE			
.X	± .10	ØXX	± .10				
.XX	± .020	ØXX	± .015				
.XXX	± .015	ØXXX	± .010				
APPROVALS				DATE			
DRAWN	LFJ	4/13/06					
CHECKED							
APPROVED							
SIZE	PART NO.	25SH-B-XX-TS		REV.	B		
REF:	SCALE:	NTS	SHEET	1	OF 1		