

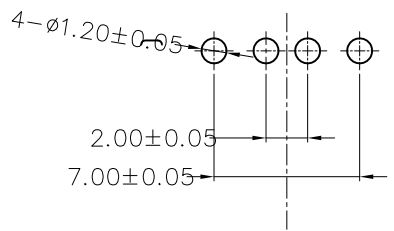
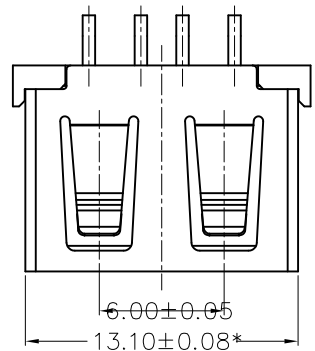

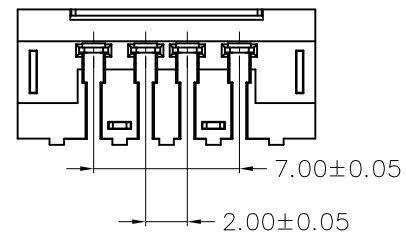


由Autodesk 教育版产品制作

由Autodesk 教育版产品制作



FRONT EDGE OF CONNECTOR
PCB LAYOUT

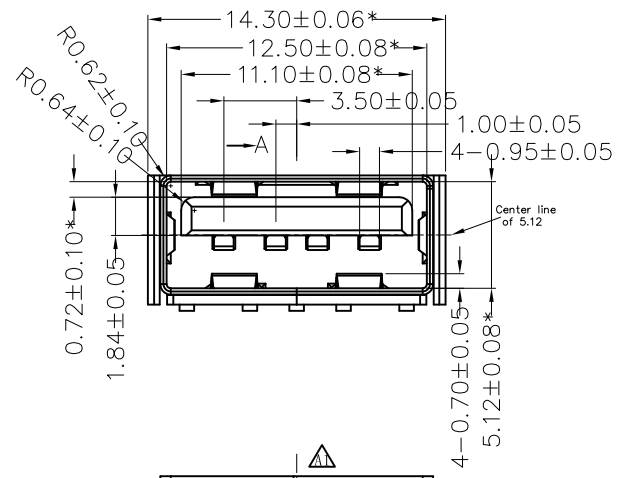

NOTES:

- 1. HOUSING: SEE NOTES.
- TERMINAL: SEE NOTES.
- SHELL: SEE NOTES.

SPECIFICATION:

- 1. ELECTRICAL CHARACTERISTIC:
 - CONTACT RESISTANCE: 30MΩ MAX
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
 - INSULATION RESISTANCE: 1000MΩ MIN
- 2. MECHANICAL CHARACTERISTIC:
 - INSERTION FORCE: 35N(3.57KGF) MAX
 - EXTRACTION FORCE: 10~35N(1.02~3.57KGF) MIN
 - DURABILITY: 1500 CYCLES EXTRACTION FORCE: 10~35N 5000 CYCLES MIN
 - 5000 CYCLES EXTRACTION FORCE: 3~35N
- 3. ENVIRONMENTAL:
 - OPERATING TEMPERATURE: -55℃+85℃
- 4. Contact finish:
 - 01: Selective Gold Flash
 - 02: Selective Gold 3U"
 - 03: Selective Gold 5U"
 - 04: Selective Gold 15U"
 - 05: Selective Gold 30U"

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司							
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	910-461A1012Y10100		
X.	±0.15	X.	±5.*	比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AF10.0C款180度无脚无边铁壳		
.XX	±0.05	.XX	±1.*	日期 DATE	2012.06.15	核准 APPD		角法 VIEW		版本 VER	A0
.XXX	±0.03	.XXX	±0.5*								