


1 2 3 4 5 6 7 8


A

A

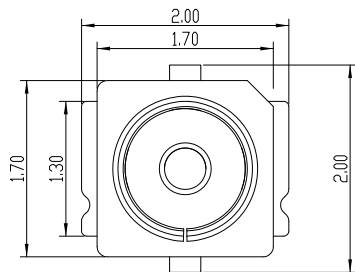


B

B

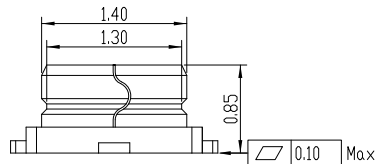

C


C



SECTION A-A


D

D



E

E

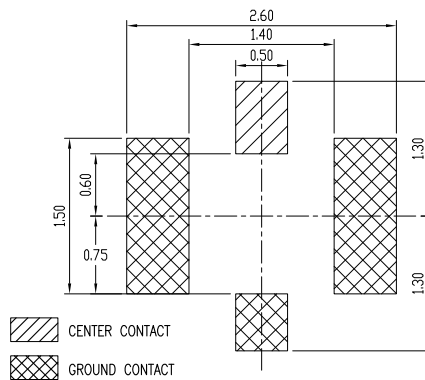

RECOMMENDED PCB LAYOUT
(TOLERANCE:±0.05)

NOTES :

1.0. RATING :

- 1.1. VOLTAGE :60 VAC (R.M.S.)
- 1.2. NOMINAL CHARACTERISTIC IMPEDANCE: 50 Ohm
- 1.3. APPLICABLE FREQUENCY: DC ~ 6GHz
- 1.4. VSWR: 1.3 MAX. (DC~3GHz), 1.5 MAX. (3~6GHz)
- 1.5. TEMPERATURE : -40°C TO +85°C

2.0. ALL DIMENSIONS SHOULD BE CONTROLLED IN FAI.:

3.0. MARKED SHOULD BE CONTROLLED BY QIP.:

F


F




深圳市万骏达电子有限公司

<http://www.wanjunda.com>




品名 (ITEM NO)	IPEX天线座 第三代
料号 (PART NO)	RF-IPEX-SMT-03
模号 (MODEL NO)	

图号 (DWG NO)		单位 (UNIT) : MM
本 (REV)		比例 (SCALE) 1:1
日期 (DATE)		
设计 (DESIGN)		未注公差 TOLERANCE UNSPECIFIED
审核 (CHECKED)		X.X ±0.30
核准 (APPROVED)		X.XX ±0.15
		X.XXX ±0.10
		X" ±5"
		X.X" ±2"






1 2 3 4 5 6 7 8

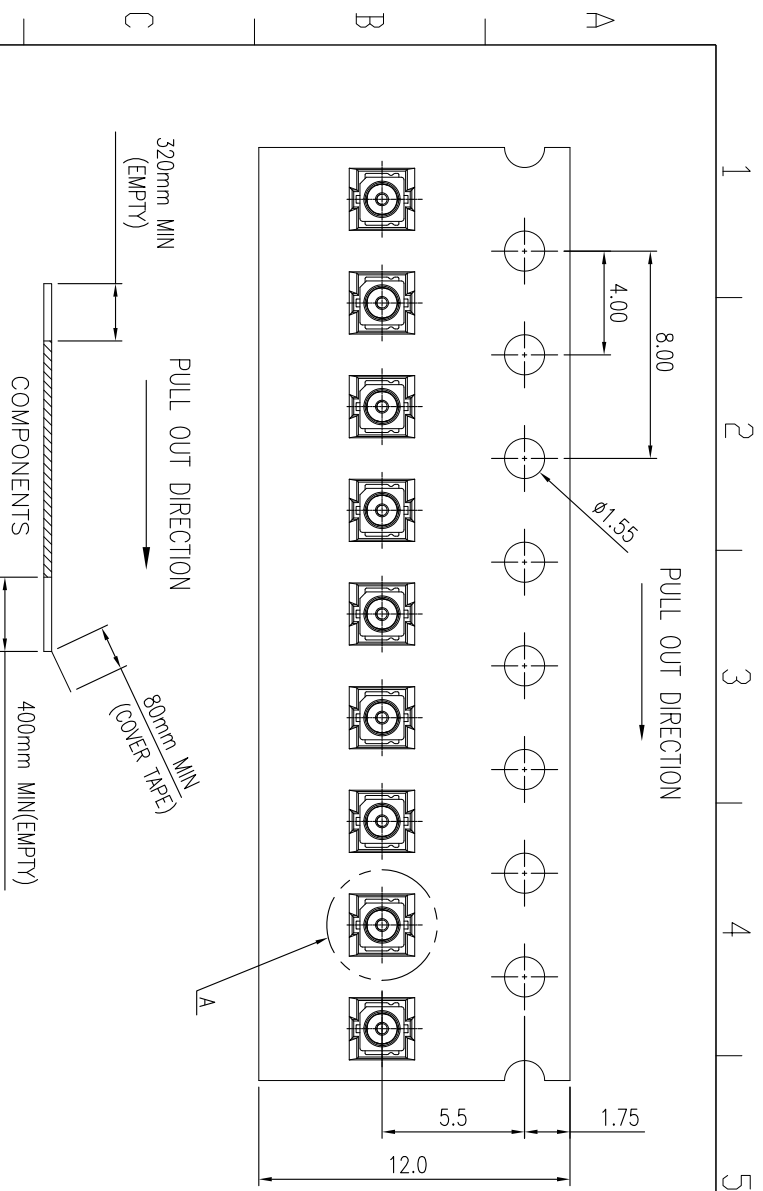

- NOTES:
1. MATERIAL :
 - 1.1 EMBOSSED CARRIER: PET
 - 1.2 COVER TAPE: PET
 - 1.3 SHIPPING CARTON: CORRUGATED FIBER
 2. DIMENSION :
 - 2.1 REEL: W=12.4
 - 2.2 SHIPPING CARTON: L=190, W=190, H=190
 3. QUANTITY :
 - 3.1 PRIMARY PACKING: 3,000PCS/REEL
 - 3.2 SECONDARY PACKING: 10REELS/CARTON(30,000PCS)
 4. WEIGHT :
 - 4.2 NET WEIGHT: 0.176KG/REEL, 1.76KG/CARTON.
 - 4.1 GROSS WEIGHT: 0.176KG/REEL, 2.0KG/CARTON.
 5. PEELING RESISTANCE: 10gf~130gf.

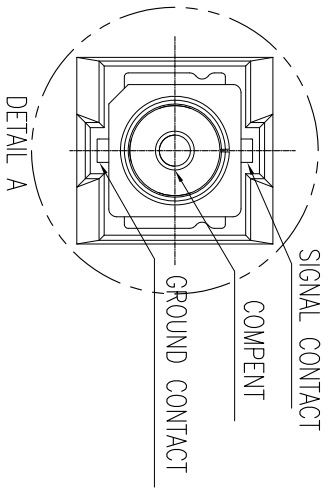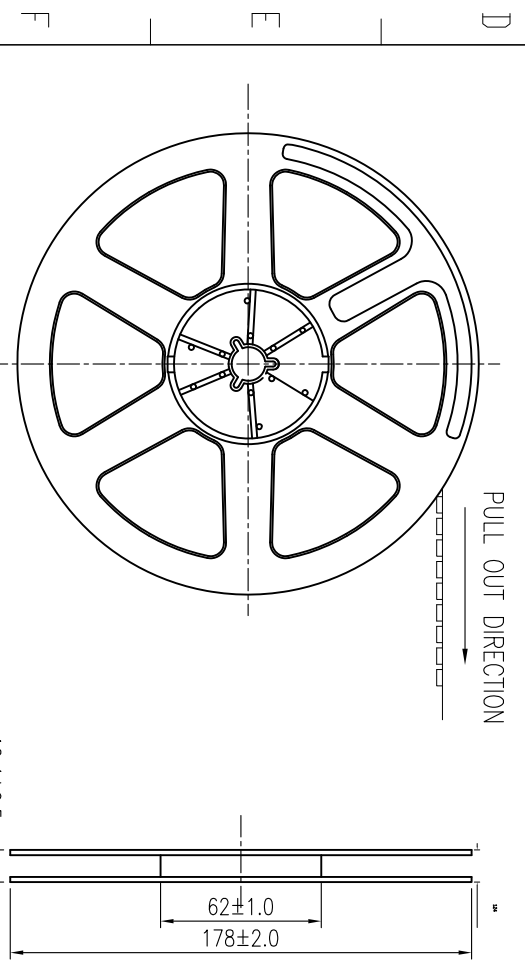

 深圳市万骏达电子有限公司 http://www.wanjunda.com		图号 (DWG NO)		单位 (UNIT) : MM
品名 (ITEM NO)	IPEX三代天线座	本 (REV)		比例 (SCALE) 1:1
料号 (PART NO)		日期 (DATE)		公差 (TOLERANCE) UNLESS OTHERWISE SPECIFIED
模号 (MODEL NO)		设计 (DESIGN)		X.X ±0.30
		审核 (CHECKED)		X.XX ±0.15
		核准 (APPROVED)		X.X ±0.10
				X.X ±2°

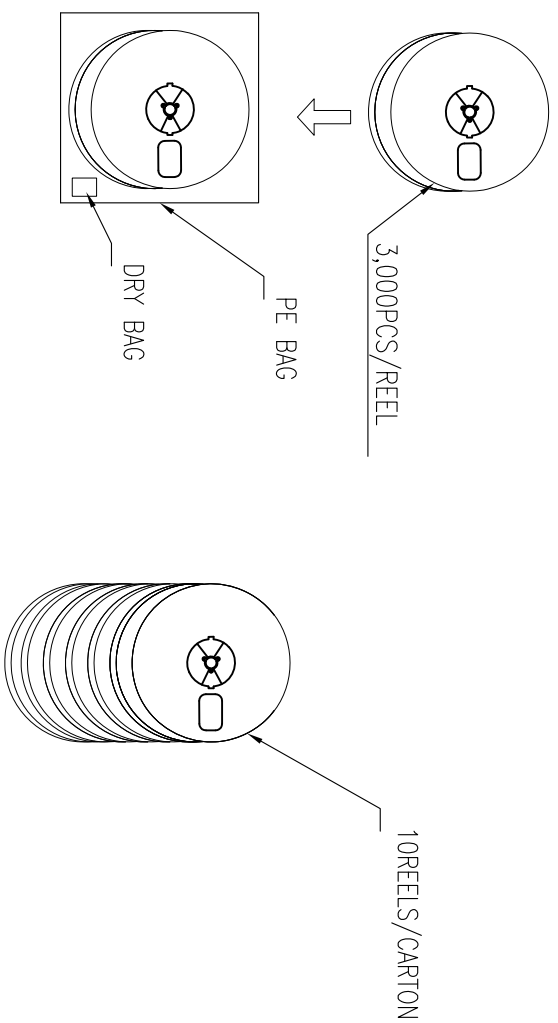

QTY: 30,000 PCS
N. W: 1.76 KGS
G. W: 2.0 KGS
MEAS: 19X19X19CM

 深圳市万骏达电子有限公司 http://www.wanjunda.com				图号 (DWG NO)		单位 (UNIT) : MM
品名 (ITEM NO)	I PEX三代天线座	本 (REV)		比例 (SCALE) 1:1		
料号 (PART NO)		日期 (DATE)		设计 (DESIGN)		公差 (TOLERANCE) UNDESIGNATED
模号 (MODEL NO)		审核 (CHECKED)		核准 (APPROVED)		X.XX ±0.30 X.XX ±0.15 X.XX ±0.10 X.XX ±0.05