




Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

DRAWING FOR PACKING(2:1)



UNREELING DIRECTION
→

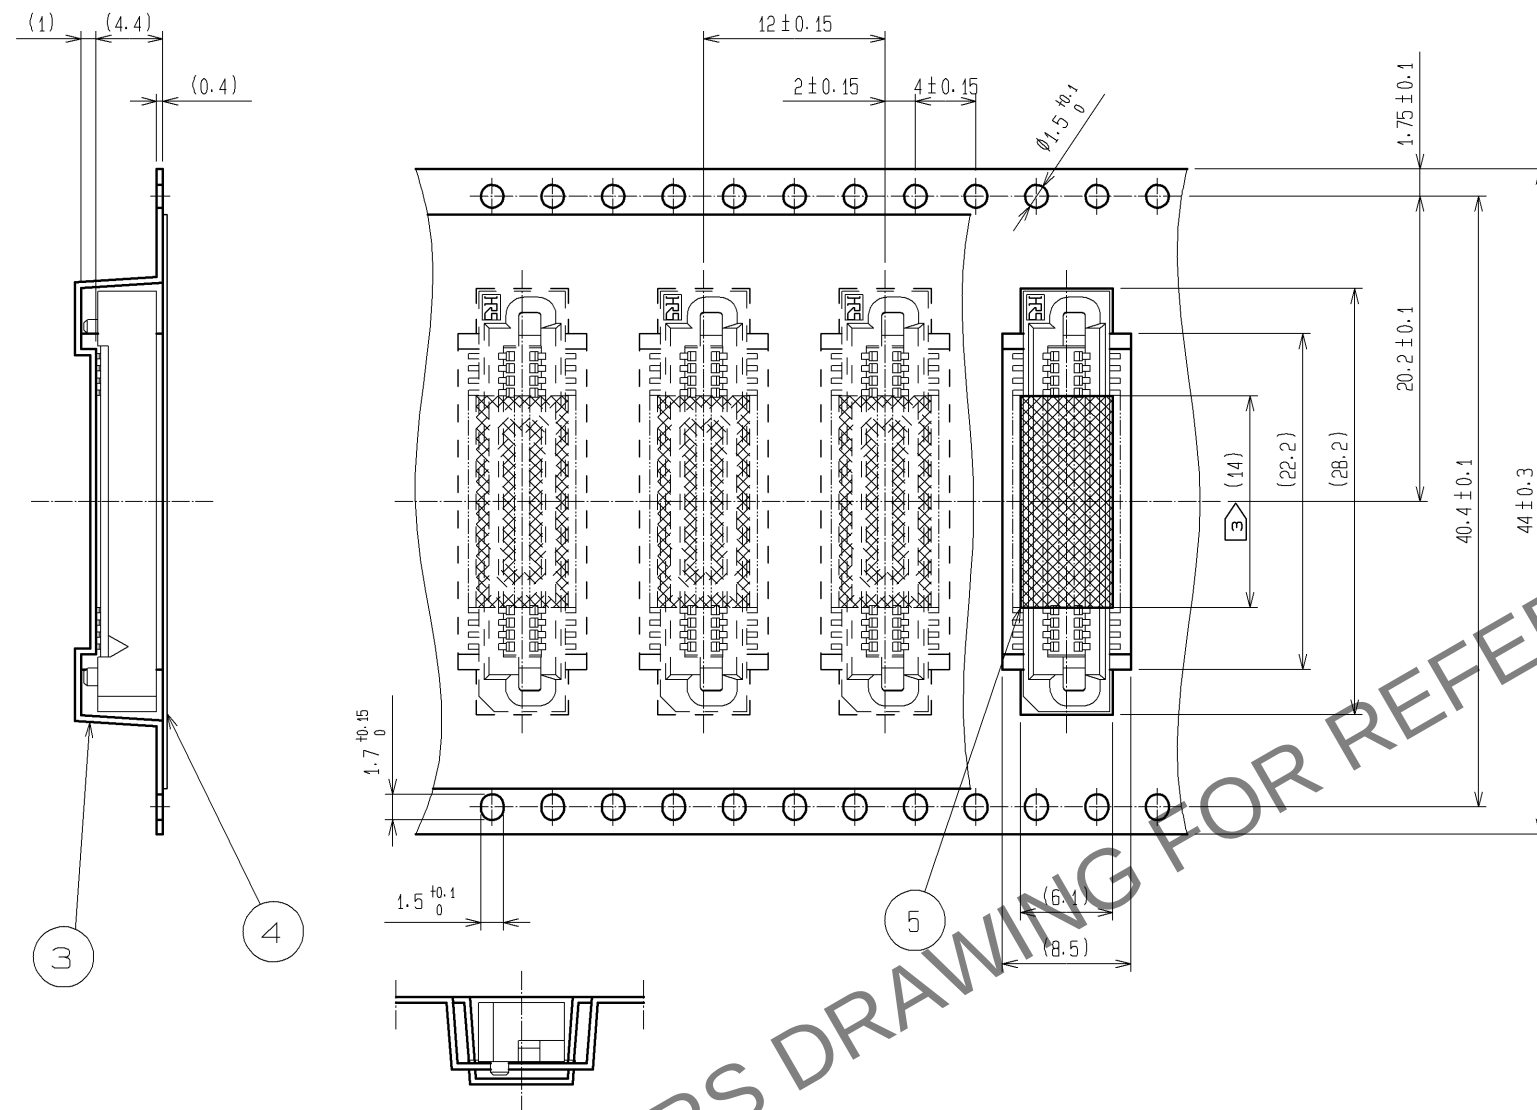

REEL DIMENSION (FREE)

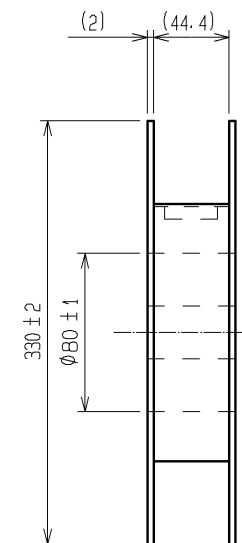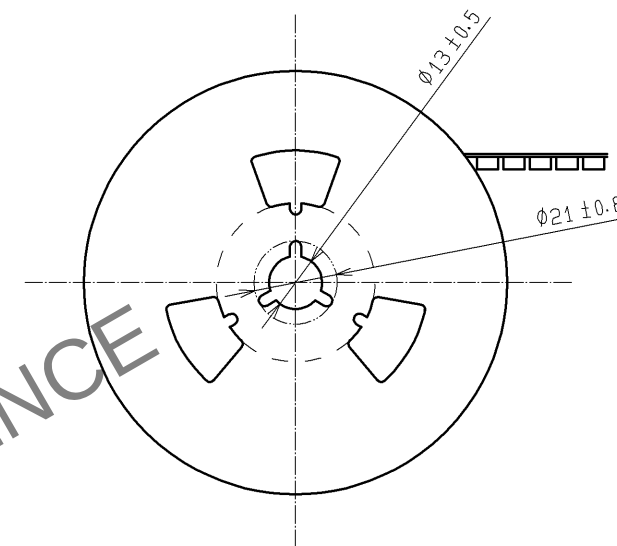

DETAIL OF TAPE FOR VACUUM PICKUP (5:1)

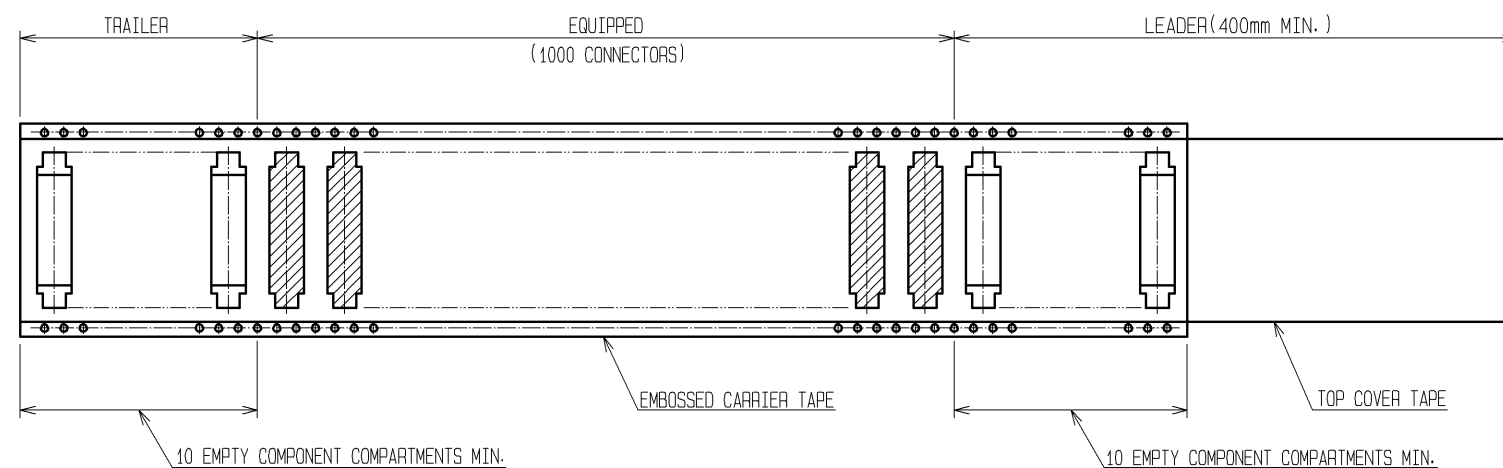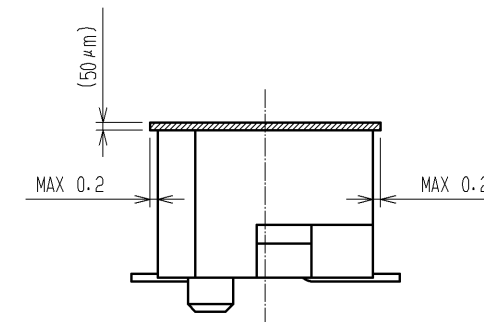


- NOTE 1 1 REEL : 1000 CONNECTORS.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
3 REMOVE THE VACUUM PICKUP TAPE AFTER MOUNTING THE CONNECTOR.

HRS


DRAWING NO.	EDC3-071640-23
PART NO.	FX6-50S-0.8SV(93)
CODE NO.	CL576-0104-6-93

2/2


Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

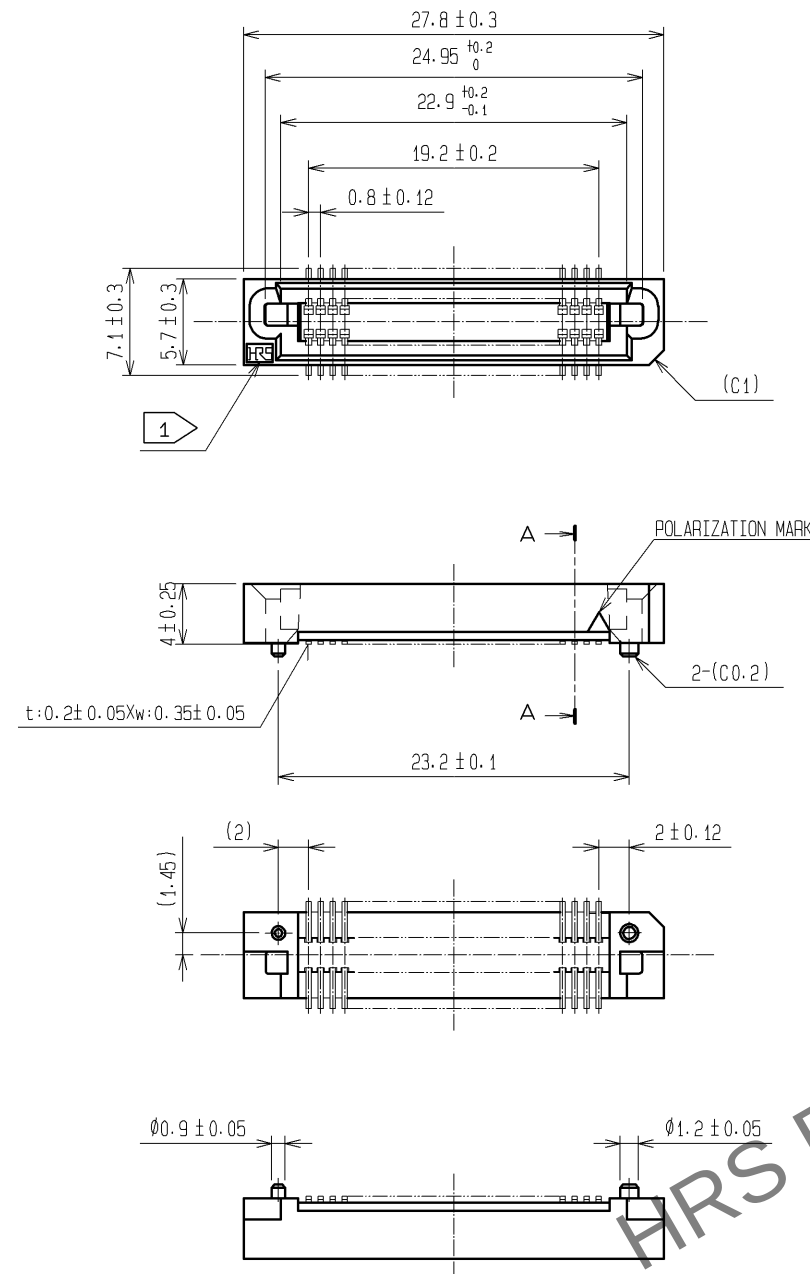


RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

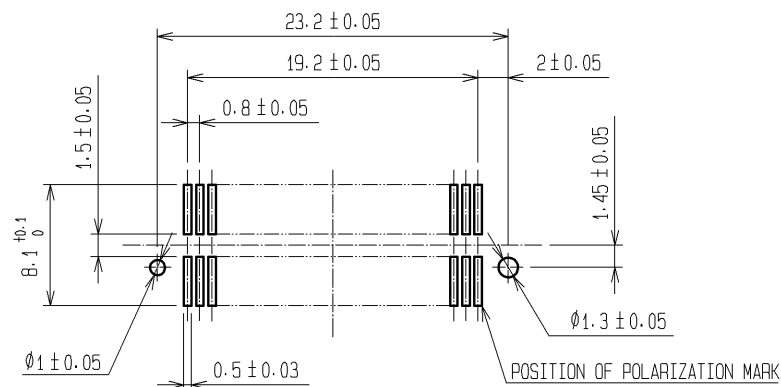

A-A (10:1)

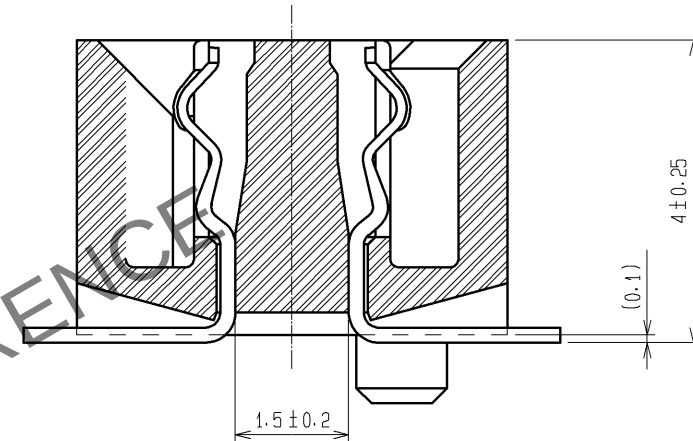

- NOTE
- 1 HRS MARK SHALL BE OPTIONAL.
 - 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 - 3 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.
 - 4 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.
 - 5 FOR MODIFICATION, ETC, PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.						
		LEAD AREA:TIN-PLATING 1μm min.						
		UNDER PLATING:NICKEL 2μm min.						
1	PPS	LIGHT BROWN UL94V-0	5	POLYIMIDE	TAPE FOR VUCUUM PICKUP			
			4	POLYESTER	TOP COVER TAPE			
			3	POLYSTYRENE	EMBOSSED CARRIER TAPE			
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	08.12.22	DRAWING NO.	EDC3-071640-23			
		CHECKED : HT. YAMAGUCHI	08.12.22	PART NO.	FX6-50S-0.8SV(93)			
		DESIGNED : SY. KAMIGA	08.12.19	CODE NO.	CL576-0104-6-93			
		DRAWN : TP. MATSUMOTO	08.12.19					
								12