

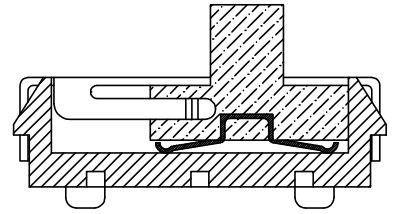
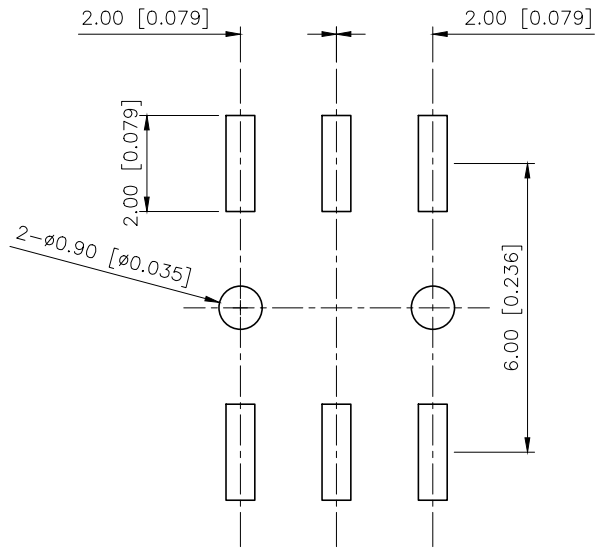
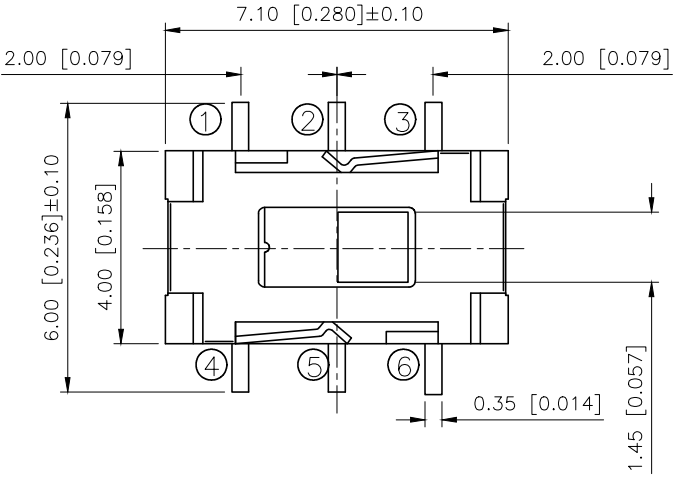


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.21	阿树



NOTE:
Rating:DC 12V 50mA Operating
Force:200±100gf
Lifetime:10 000 Cycles

PCB LAYOUT

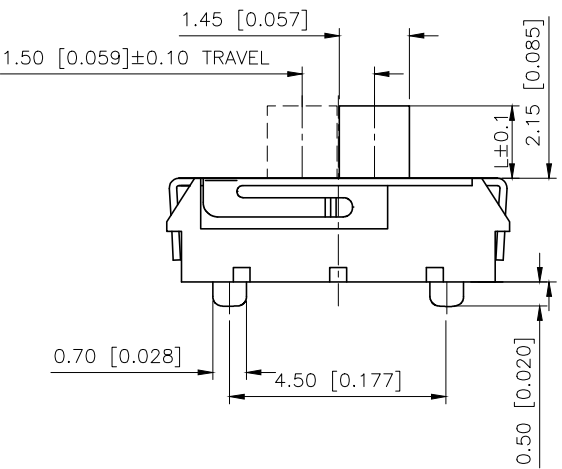

SCHEMATIC

PAPT NO	L
SS-3380S-L0	1.5
SS-3380S-L1	2.0
SS-3380S-L2	3.0
SS-3380S-L3	4.0

5	Terminal	6	Brass (0.30t)	Ag Plated
4	Contact spring	1	Phosphor branze	Ag Plated
3	Base	1	LCP	Black
2	Cover	1	Sus	Natural
1	Keystake	1	PA46	Black
ITEM	PAPT NAME	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	SLIDE SWITCH
CHECKED		UNIT:	mm/in	PART NO.:	SS-3380S-x
APPROVED		SIZE:	A4	DWG NO.:	