

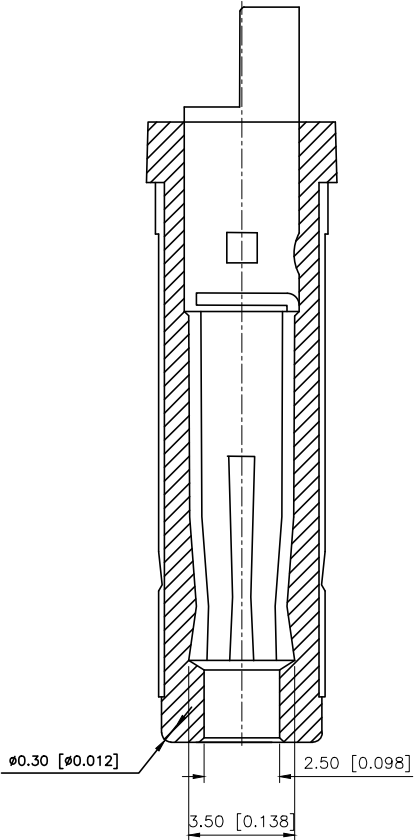


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.07.01	阿树

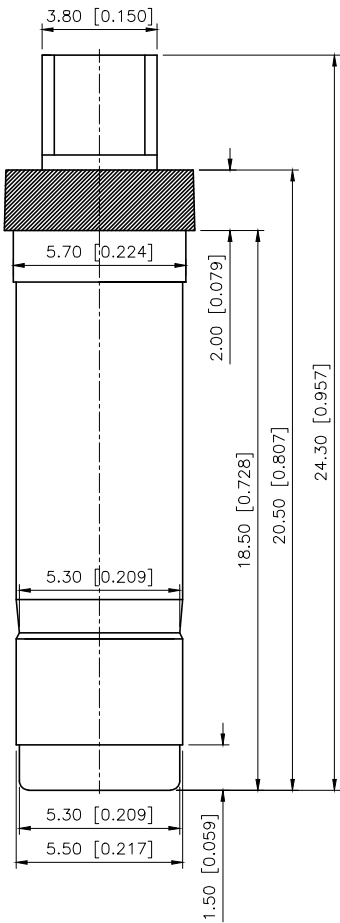

SPECIFICATION
1.Rating : DC 20V 15A;
2.Contact resistance: $\leq 0.03\Omega$;
3.insulation resistance: $\geq 100M\Omega$ (DC500V);
4.Withstand voltage: 500VAC ;
5.Insertion and extraction force: 3-30N;

1	Copper pipe	1	Brass	Ni
2	O-terminal	1	Phosphor copper	Ni
3	Insulators	1	LCP	-
No.	DESCRIPTION	QTY	MATERIAL	PLATING

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW:	
UNIT:	mm/in
SIZE:	A4

MODEL TYPE:	DC PIUG
PART NO.:	DT-2555243
DWG NO.:	

SCALE	PAGE	REVISION
N/A	1/1	A1