


IN0131

Inductive sensor

INE2004DABOA

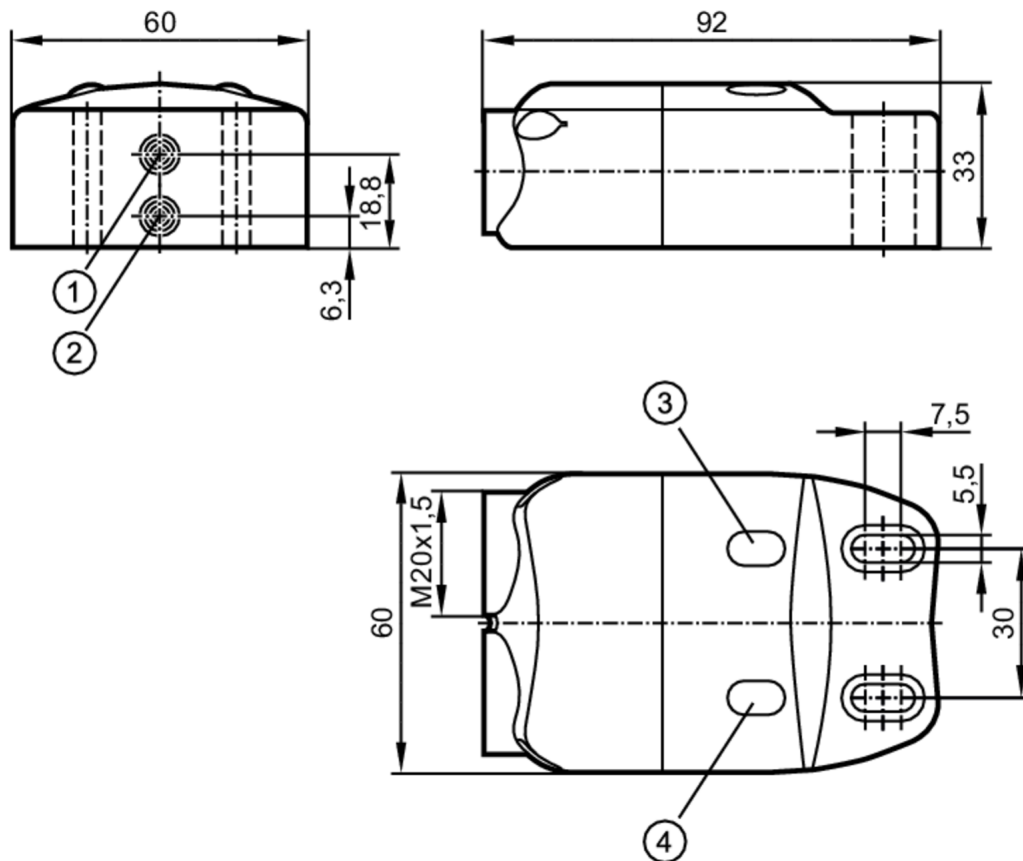

- 1 sensor 1
- 2 sensor 2
- 3 LED OUT 2
- 4 LED OUT 1



Product characteristics

Output function		2 x normally open
Sensing range [mm]		4
Housing		rectangular
Dimensions [mm]		33 x 60 x 92

Electrical data

Frequency AC [Hz]		47...63
Operating voltage [V]		20...250 AC/DC
Current consumption [mA]		< 15
Protection class		II
Reverse polarity protection		yes

Outputs

Output function		2 x normally open
Max. voltage drop switching output DC [V]		6
Max. voltage drop switching output AC [V]		6.5

IN0131



Inductive sensor

INE2004DABOA

Minimum load current	[mA]	5
Max. leakage current	[mA]	2.5 (250 V AC) / 1.3 (110 V AC) / 0.8 (24 V DC)
Permanent current rating of switching output AC	[mA]	250; (350 (...50 °C))
Permanent current rating of switching output DC	[mA]	100
Short-time current rating of switching output	[mA]	2200; (20 ms / 0,5 Hz)
Switching frequency AC	[Hz]	25
Switching frequency DC	[Hz]	50
Short-circuit protection		no
Overload protection		no

Detection zone		
Sensing range	[mm]	4
Real sensing range Sr	[mm]	4 ± 10 %
Operating distance	[mm]	0...3.25

Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis	[% of Sr]	1...15
Switch point drift	[% of Sr]	-10...10

Operating conditions		
Ambient temperature	[°C]	-25...70
Protection		IP 67

Tests / approvals		
EMC		EN 60947-5-2
MTTF	[years]	307
UL approval	Ta	-25...70 °C
	Enclosure type	Type 1
	power supply	Hazardous voltage
	File number UL	E174191

Mechanical data		
Weight	[g]	174.8
Housing		rectangular
Mounting		non-flush mountable
Dimensions	[mm]	33 x 60 x 92
Materials		housing: PA

Displays / operating elements		
Display	switching status	2 x LED, yellow

Electrical connection		
Required protection		miniature fuse to IEC60127-2 sheet 1; ≤ 2 A; fast acting

Accessories		
Items supplied		washers: 2
		cylinder screws: 2 x M5 x 18

Remarks		
Remarks		Recommendation: Check the safe functioning of the unit after a short circuit.



Inductive sensor

INE2004DABOA


Pack quantity

1 pcs.

Electrical connection

terminal strip in the terminal chamber:

Connection

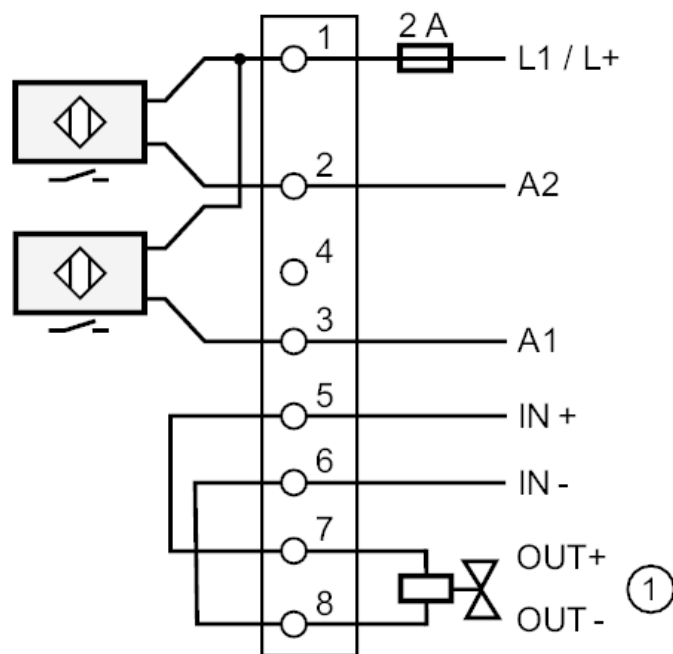

1

Note miniature fuse to IEC60127-2 sheet 1 ≤ 2 A fast acting output solenoid valve