


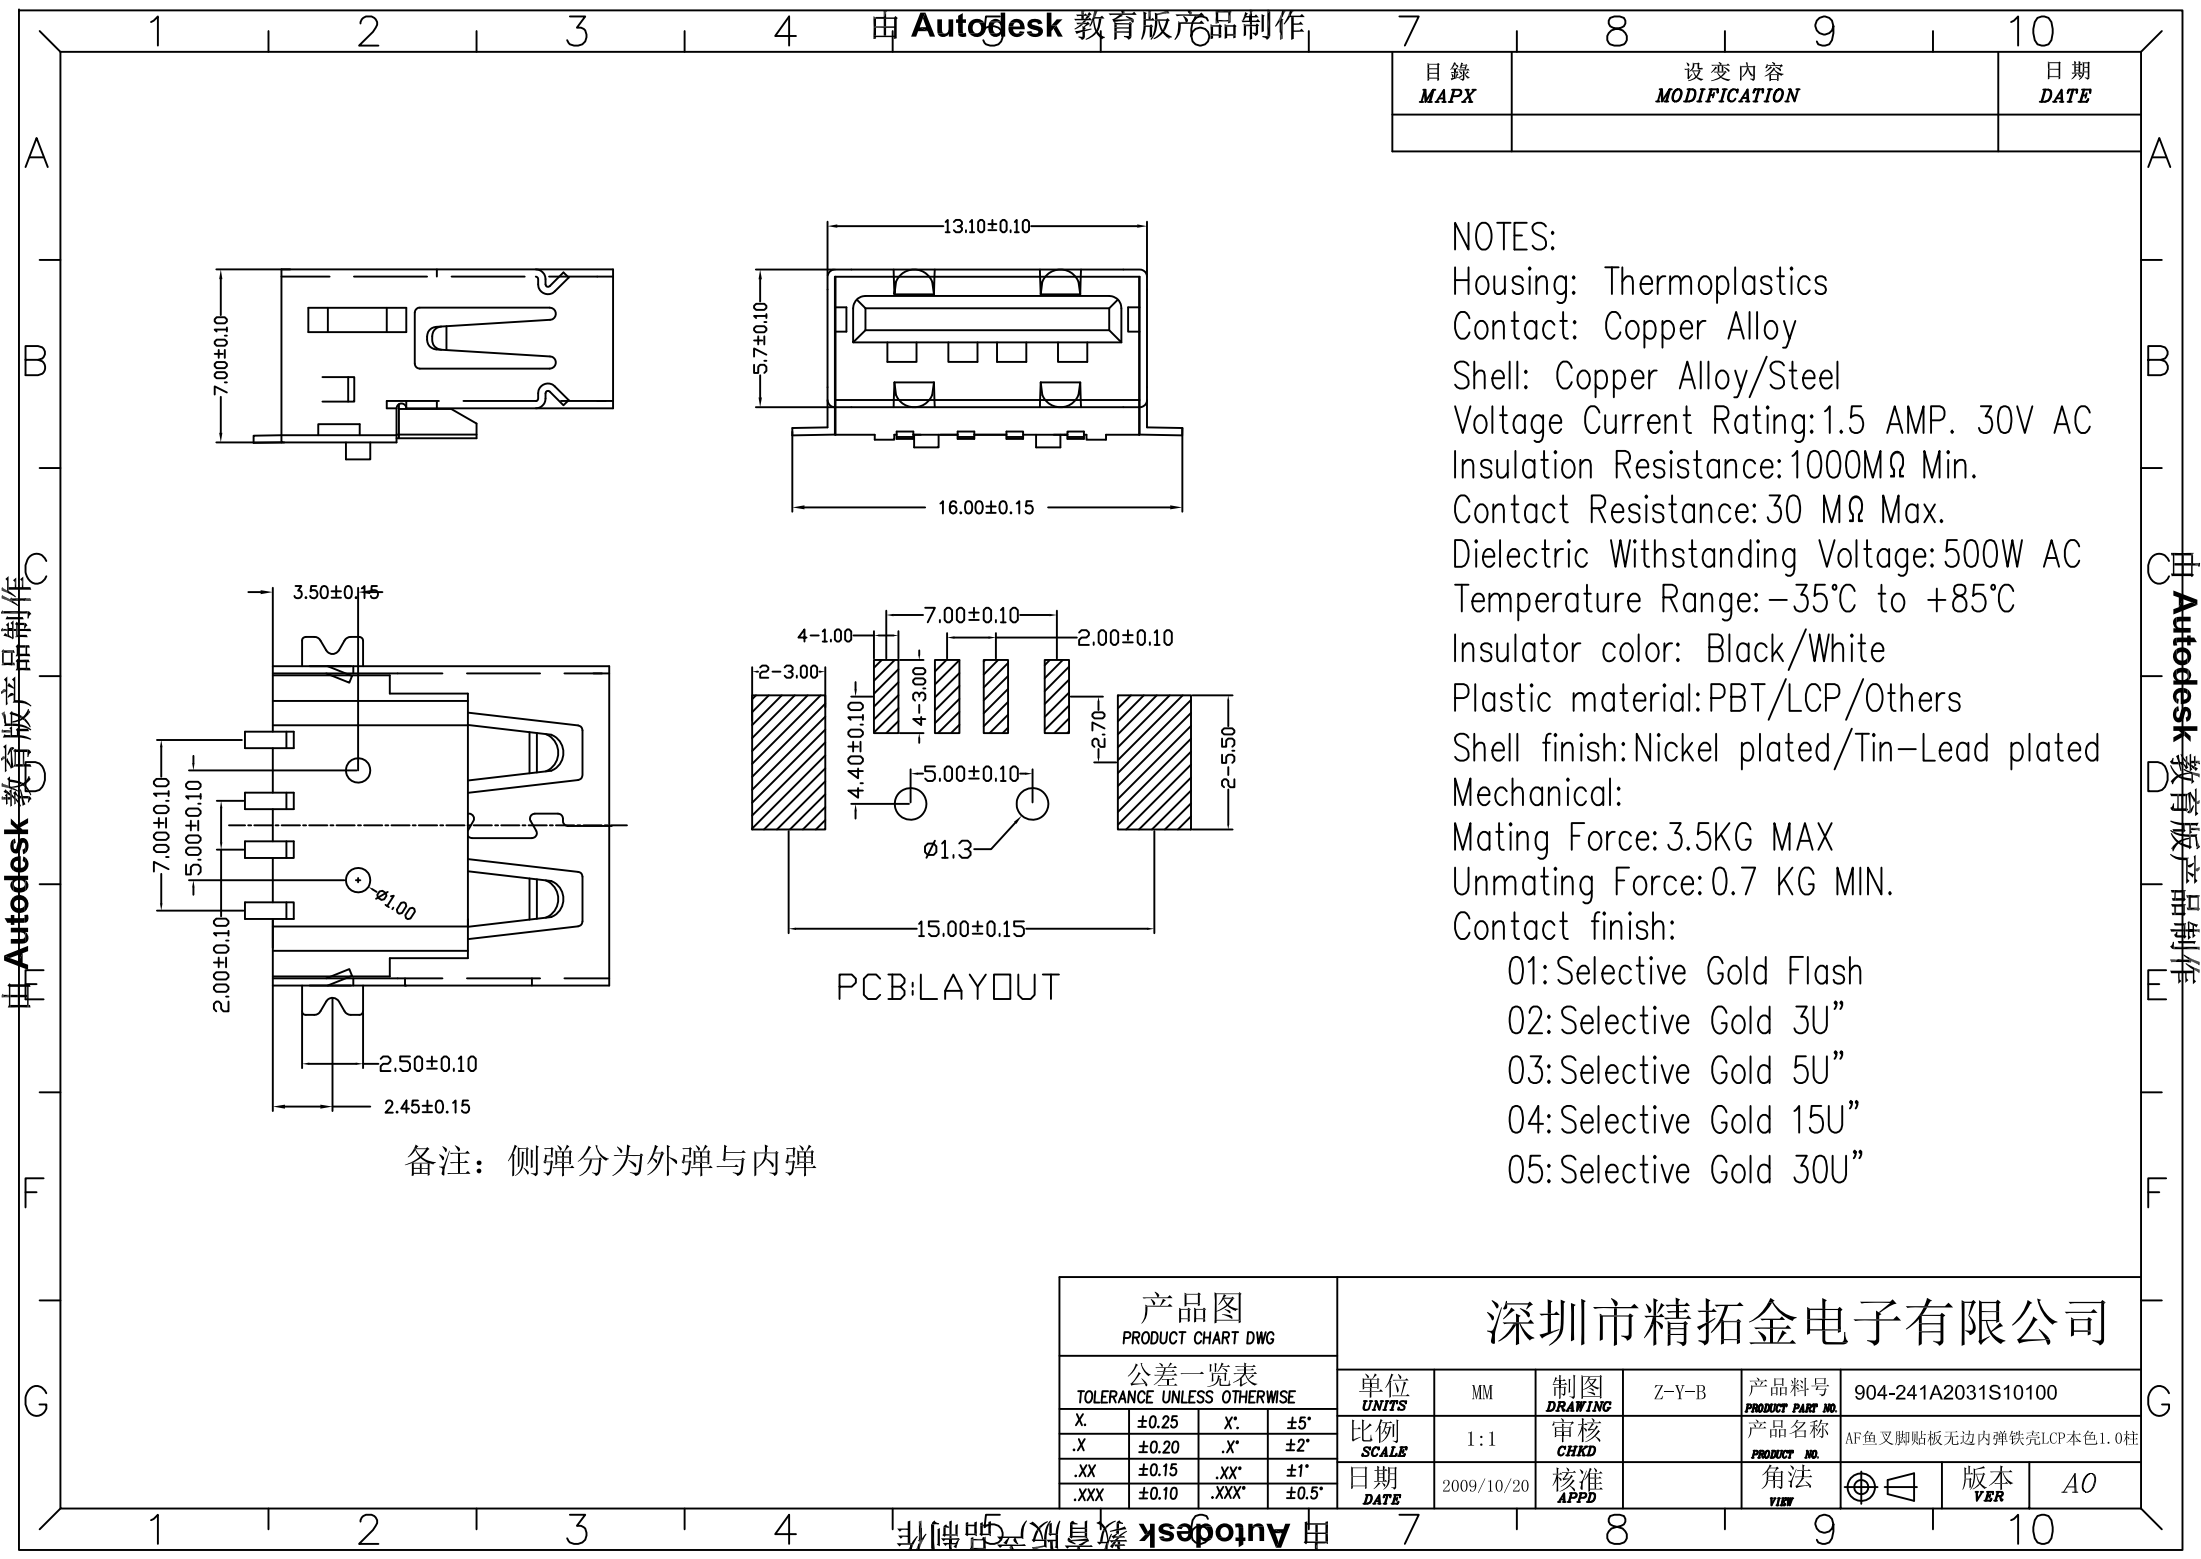

目錄 MAPX	設 變 內 容 MODIFICATION	日 期 DATE

NOTES:

Housing: Thermoplastics

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000MΩ Min.

Contact Resistance:30 MΩ Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range:−35℃ to +85℃

Insulator color: Black/White

Plastic material:PBT/LCP/Others

Shell finish:Nickel plated/Tin–Lead plated

Mechanical:

Mating Force:3.5KG MAX

Unmating Force:0.7 KG MIN.

Contact finish:

01:Selective Gold Flash

02:Selective Gold 3U”

03:Selective Gold 5U”

04:Selective Gold 15U”

05:Selective Gold 30U”

产 品 图 PRODUCT CHART DWG		深 圳 市 精 拓 金 电 子 有 限 公 司						
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	904-241A2031S10100	
X.	±0.25	X'.	±5°	比例 SCALE	1:1	审核 CHKD	产品名称 PRODUCT NO.	AF鱼叉脚贴板无边内弹铁壳LCP本色1.0柱
.X	±0.20	.X'.	±2°	日期 DATE	2009/10/20	核准 APPD	角法 VIEW	⊕ ⊖
.XX	±0.15	.XX'.	±1°				版本 VER	A0
.XXX	±0.10	.XXX'.	±0.5°					