
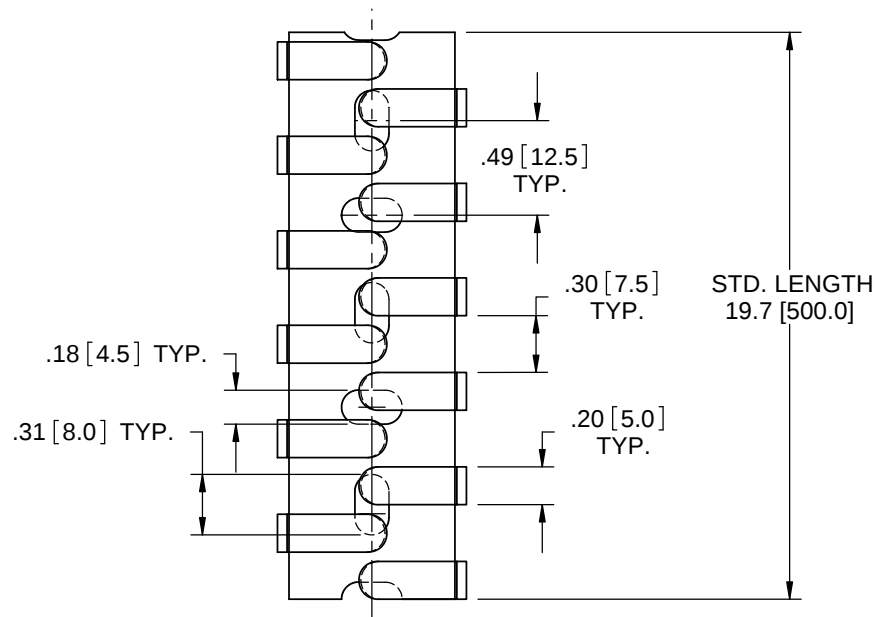


- NOTES:
1. MATERIAL: POLYPROPYLENE (RMS-177).
 2. COLOR: GRAY RAL7040.
 3. SHR CAT INSTALLATION TOOL SERIES CAN BE USED FOR QUICK HARNESS ASSEMBLY
 4. DOUBLE SIDED ADHESIVE TAPE (RMS-93).
 5. SCREW MOUNT CHANNEL IS UL LISTED

PART NO.	EXT. DIM. "A"	MOUNTING METHOD	INT. SECTION IN ² [MM ²]
*RX1313-0	.49 [12.5]	SCREW	.171 [110.0]
*RX1313-4		ADHESIVE	
RX1616-0	.63 [16.0]	SCREW	287 [185.0]
RX1616-4		ADHESIVE	
RX2020-0	.79 [20.0]	SCREW	.496 [320.0]
RX2020-4		ADHESIVE	
RX2525-0	.98 [25.0]	SCREW	.775 [500.0]
RX2525-4		ADHESIVE	
RX3030-0	1.18 [30.0]	SCREW	1.116 [720]
RX3030-4		ADHESIVE	
RX4040-0	1.57 [40.0]	SCREW	2.046 [1320.0]
RX4040-4		ADHESIVE	
RX5050-0	1.97 [50.0]	SCREW	3.162 [2040.0]
RX5050-4		ADHESIVE	

*ONLY ON THESE TWO PARTS,
ALL HOLES HAVE THE SAME ORIENTATION

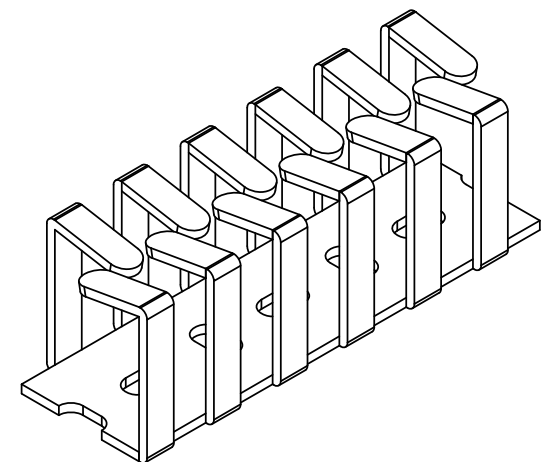

			TITLE: CHANNEL, FLEXIBLE (RICHFLEX)				 		DWG IN IN [MM]									
			CREATED USING SOLIDWORKS		FILE #: RX XXXX-X		DWN: SM		APP: -		FINAL							
G REMOVED V-0 MATERIAL, SEE CO 200625			SK 02/16/11		TOLERANCES UNLESS NOTED		SHEET: 1 OF 2		SHEET SIZE: A		DT: 01/04/05		CHKD: -		PART #		PRINT TYPE	
F SEE CO 200072			SK 11/28/07		.XX=±.010		RE: RICHCO, INC.		RICHCO, INC. ENG@RICHCO-INC.COM (773) 539-4060		SEE TABLE		CA					
E SEE ECN #903 FOR CHANGES			SM 01/04/05		.XXX=±.005													
- SEE ENGINEERING FOR REV A-D			-- ----		FRAC.=±1/64													
REV. DESCRIPTION			ENGR. DATE		ANG.=±1°													

TOLERANCES
UNLESS NOTED
.XX=±.010
.XXX=±.005
FRAC.=±1/64
ANG.=±1°