
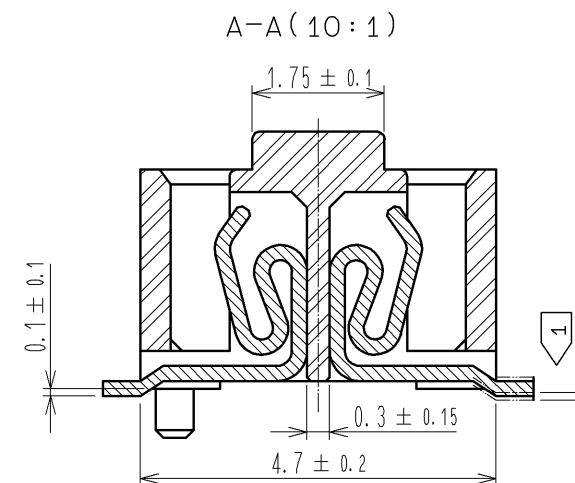
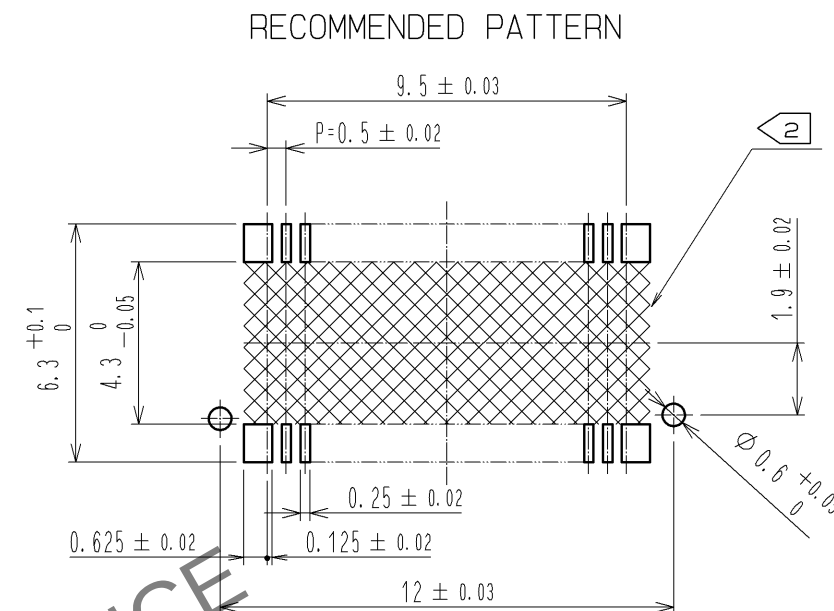
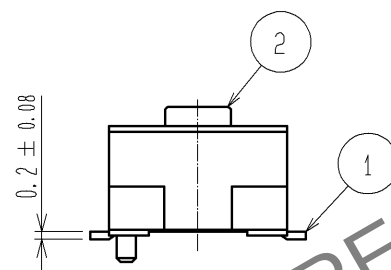
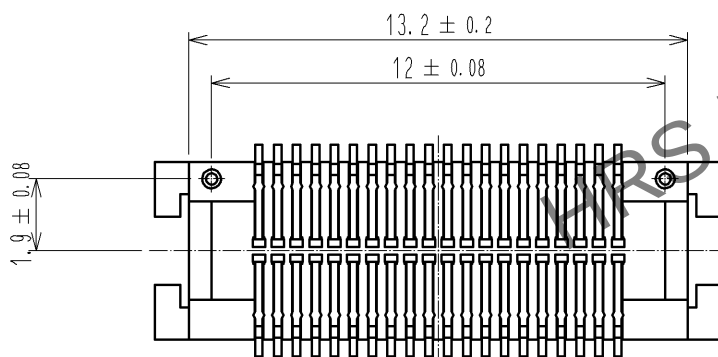
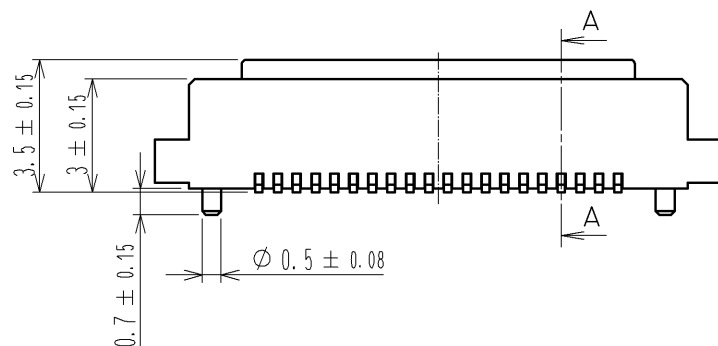


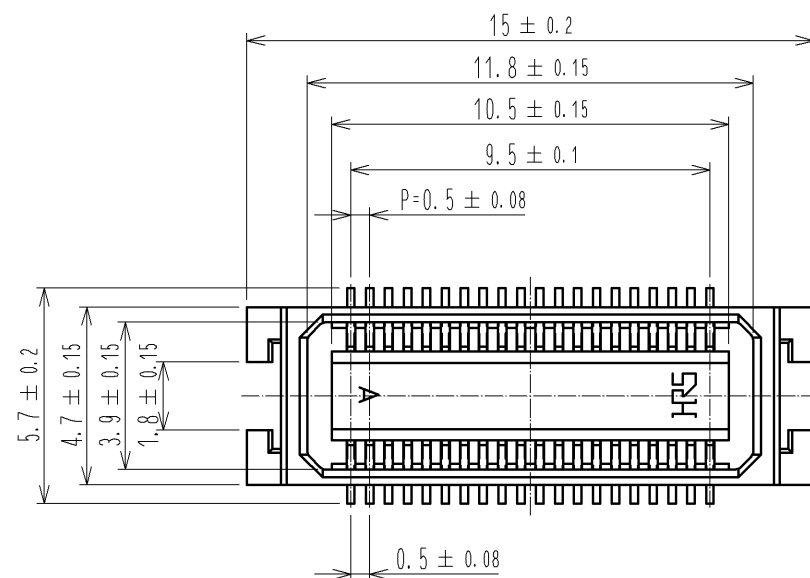



- NOTES 1: LEAD CO-PLANARITY INCLUDE REINFORCED METAL FITTINGS SHALL BE 0.1mm MAX.
2: WHEN A PART MARKED WITH  HAS A PATTERN BUT NO RESIST ON IT. TAKE CARE TO PREVENT THE CONNECTOR FROM TOUCHING IT.

MATED HIGHT (h) (mm)

HEADER NO.	RECEPTACLE NO.	DF17A(3.0)-40DS-0.5V(57)
DF17#(2.0)-40DP-0.5V(57)	5	
DF17#(4.0)-40DP-0.5V(57)	7	

MATED

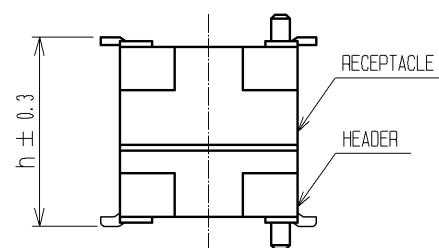

2	POLYAMIDE (PA6T)	WHITE BEIGE . UL94V-0	5	PS	BLACK (PLASTIC REEL)
1	PHOSPHER BRONZE	CONTACT AREA:GOLD PLATED 0.1µm min LEAD AREA:GOLD PLATED 0.02µm min UNDER PLATING : NICKEL 1µm min	4	POLYESTER	CLEAR (COVER TAPE)
			3	A-PET	CLEAR (EMBOSSSED CARRIER TAPE)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
 HIROSE ELECTRIC CO., LTD.		APPROVED : KH. IKEDA 08.11.20	DRAWING NO. EDC3-161648-02		
		CHECKED : TS. MIYAZAKI 08.11.20	PART NO. DF17A(3.0)-40DS-0.5V(57)		
		DESIGNED : TY. YAMASAKI 08.11.19	CODE NO. CL683-0014-1-57		
		DRAWN : TY. YAMASAKI 08.11.19	DATE 1/2		

