


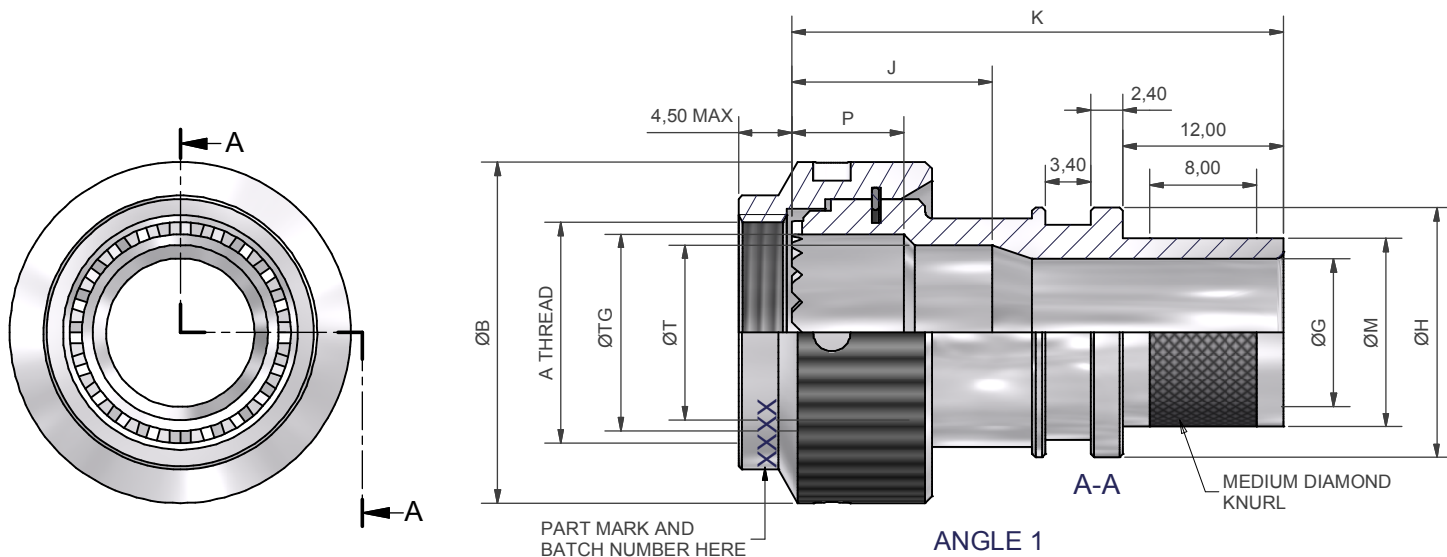

APKG1-12-14-15-1-C

SERIES
CONNECTOR INTERFACE
ANGLE
SHELL SIZE (TABLE 1)
ENTRY SIZE (TABLE 3)
CHAMBER LENGTH J (TABLE 2 STR. ONLY)
MATERIAL (TABLE 4)
FINISH (TABLE 4)

DRAWN	C.WALLACE	DATE	30/01/2017
SALES APPR	J.CHAPMAN	DATE	30/01/2017
DESIGN APPR			
PROD APPR			
QUAL APPR			
ISSUE	REV.	DCR	WEIGHT
6	2	6460	
NCAGE CODE U5792			

PART NUMBER:		APKG SERIES	
TITLE:		BANDING ADAPTOR	
ASSY USED ON: SOURIAU 851 SERIES			
THIS DRAWING IS COPYRIGHT AND THE PROPERTY OF POLAMCO LTD IT MUST NOT BE COPIED, USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY.		POLAMCO LTD, WESTON LOCK, LOWER BRISTOL ROAD BATH BA2 1EP	

3RD ANGLE PROJECTION NOT TO SCALE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN MILLIMETRES
GENERAL TOL
LINEAR ± 0.25 MM
ANGULAR $\pm 1^\circ$

MATERIAL
SEE TABLE

FINISH
SEE TABLE

Polamco

TE connectivity

SHT 1

DRAWING NO: P12319

TABLE 1

SHELL SIZE	A THREAD	ØB MAX	ØT MIN	ØTG MIN	P	C MAX	D MAX	E MAX	F MAX	Z
08	7/16 - 28UNEF	16,7	7,3	8,4	8,4	18,5	24,7	27,7	30,4	12
10	9/16 - 24UNEF	20,7	10,2	11,5	8,4	19,3	25,9	31,2	32,2	15
12	11/16 - 24UNEF	25,6	13,1	14,7	8,4	19,7	26,3	34,2	33,7	20
14	13/16 - 20UNEF	27,9	16,4	17,7	8,4	20,6	27,2	37,2	35,2	24
16	15/16 - 20UNEF	32,7	19,3	20,8	8,4	20,9	28,0	40,7	36,9	24
18	1 1/16 - 18UNEF	35,9	21,4	23,7	8,4	21,7	28,3	44,7	38,5	30
20	1 3/16 - 18UNEF	38,2	24,6	26,7	4,8	18,2	29,1	47,2	40,1	36
22	1 5/16 - 18UNEF	41,2	27,8	29,8	4,8	18,5	29,5	50,2	41,6	40
24	1 7/16 - 18UNEF	44,2	30,9	33,0	4,8	19,4	30,4	53,2	43,1	45

TABLE 2

SHELL SIZE	J - 10* K MAX	J - 15 K MAX	J - 20 K MAX	J - 25 K MAX	J - 30 K MAX	J - 35 K MAX	J - 40 K MAX	J - 45 K MAX	J - 50 K MAX
08	30,7	35,7	40,7	45,7	50,7	55,7	60,7	65,7	70,7
10	31,6	36,6	41,6	46,6	51,6	56,6	61,6	66,6	71,6
12	32,3	37,3	42,3	47,3	52,3	57,3	62,3	67,3	72,3
14	32,7	37,7	43,2	48,2	53,2	58,2	63,2	68,2	73,2
16	33,7	38,7	44,2	49,2	54,2	59,2	64,2	69,2	74,2
18	34,5	39,5	45,0	50,0	55,0	60,0	65,0	70,0	75,0
20	35,1	40,1	45,6	50,6	55,6	60,6	65,6	70,6	75,6
22	36,6	41,6	46,6	51,6	56,6	61,6	66,6	71,6	76,6
24	37,4	42,4	47,4	52,4	57,4	62,4	67,4	72,4	77,4

* - CONSULT ENGINEERING FOR AVAILABILITY

TABLE 3

ENTRY SIZE	ØG MIN	ØH MAX	ØM MAX
04	3,2	12,4	6,2
06	4,8	12,4	7,8
08	6,4	14,0	9,4
10	7,9	15,5	10,9
12	9,5	17,1	12,5
14	11,1	18,7	14,1
16	12,7	20,3	15,7
20	15,9	23,5	18,9
24	19,0	26,7	22,0
28	22,2	29,8	25,2
32	25,4	33,0	28,4
36	28,6	36,2	31,6
40	31,8	39,4	34,8

TABLE 4

1-B	ALUMINIUM ALLOY, CADMIUM OLIVE DRAB OVER ELECTROLESS NICKEL FINISH
1-C	ALUMINIUM ALLOY, ELECTROLESS NICKEL FINISH
1-ZB	ALUMINIUM ALLOY, ZINC COBALT OLIVE DRAB OVER ELECTROLESS NICKEL FINISH
1-ZN	ALUMINIUM / ZINC NICKEL BLACK PASSIVATE OVER ELECTROLESS NICKEL
2-Z	NICKEL ALUMINIUM BRONZE, NON-REFLECTIVE SHOT BLAST FINISH
4-J	STAINLESS STEEL, PASSIVATE FINISH

DRAWN	C.WALLACE	DATE	30/01/2017	 3RD ANGLE PROJECTION NOT TO SCALE	PART NUMBER:		APKG SERIES		 Polamco 			
SALES APPR	J.CHAPMAN	DATE	30/01/2017		TITLE:		BANDING ADAPTOR					
DESIGN APPR					ASSY USED ON:		SOURIAU 851 SERIES					
PROD APPR					THIS DRAWING IS COPYRIGHT AND THE PROPERTY OF POLAMCO LTD IT MUST NOT BE COPIED, USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY.		POLAMCO LTD, WESTON LOCK, LOWER BRISTOL ROAD BATH BA2 1EP					
QUAL APPR				MATERIAL SEE TABLE FINISH SEE TABLE	NCAGE CODE		U5792		SHT	2	DRAWING NO:	P12319
ISSUE	REV.	DCR	WEIGHT		6	2	6460					