


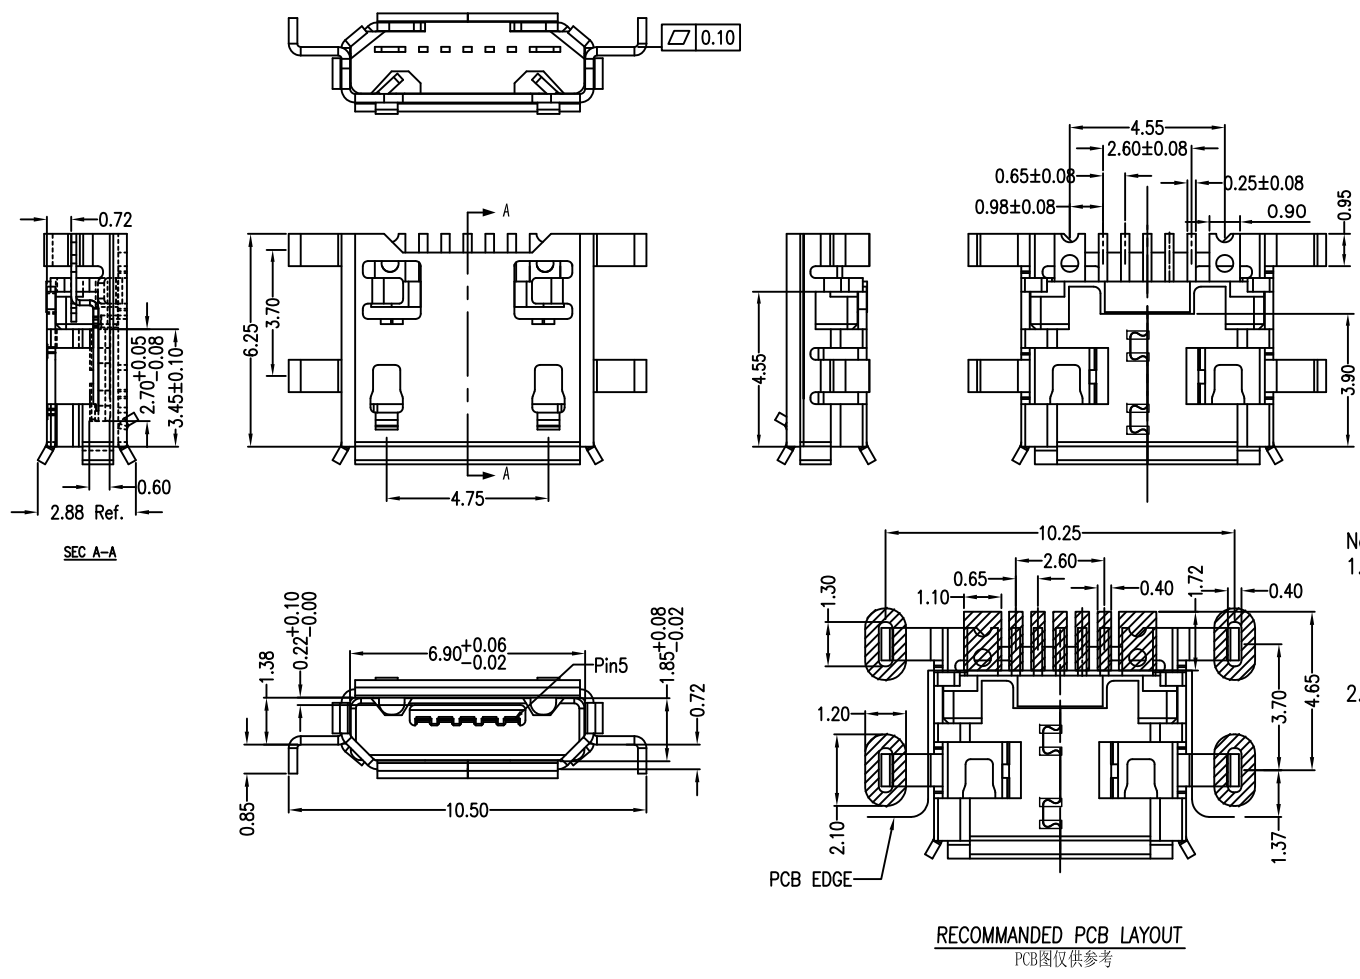

Note:
1.Material:
1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
1.2 Contact: copper alloy,t=0.15mm
1.3 Shell: copper alloy,t=0.25mm
2.Specification:
2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
2.3 Contact resistance: 30 mΩ Max.
2.4 Insulation resistance: 100 MΩ Min.
2.5 Total mating force: 3.57 Kgf Max.
2.6 Total unmating force: 1.0 Kgf Min.
2.7 Temperature range: -30°C~80°C

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	许榕强	制图料号 PRODUCT PART NO.	920-F52A2021S10100
X.	±0.15	X.	±5.°	比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	MICRO/5P-F 沉板式0.7四脚插板
XX	±0.10	XX	±2.°	日期 DATE	2016-09-09	核准 APPD	黄国荣	角法 VIEW	卷边有接地LCP黑胶
XXX	±0.05	XXX	±1.°					版本 VER	A0
XXX	±0.03	XXX	±0.5°						