
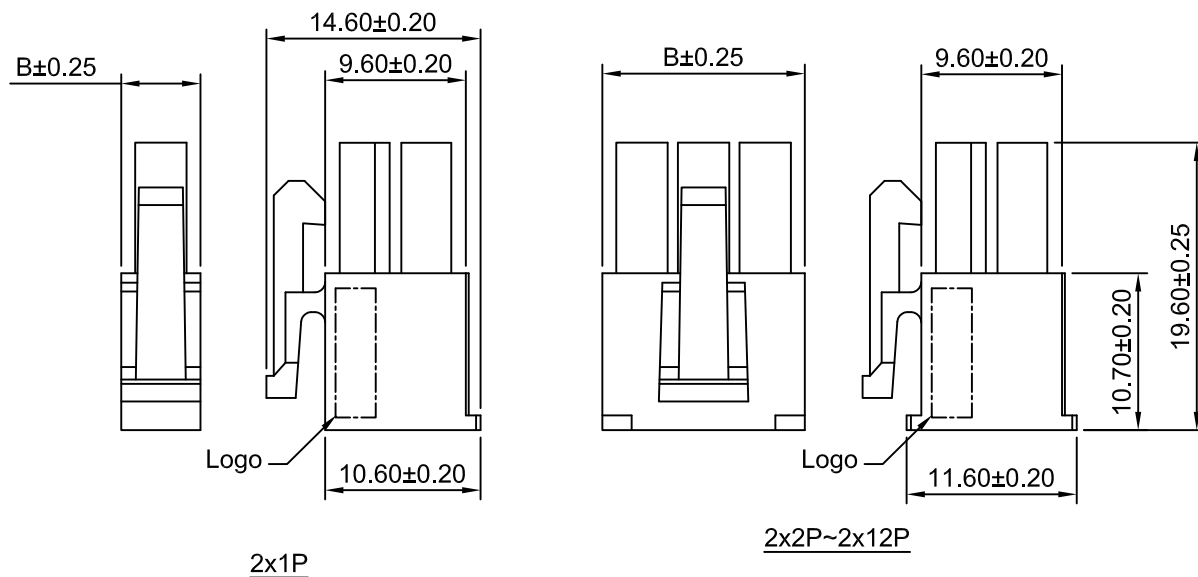


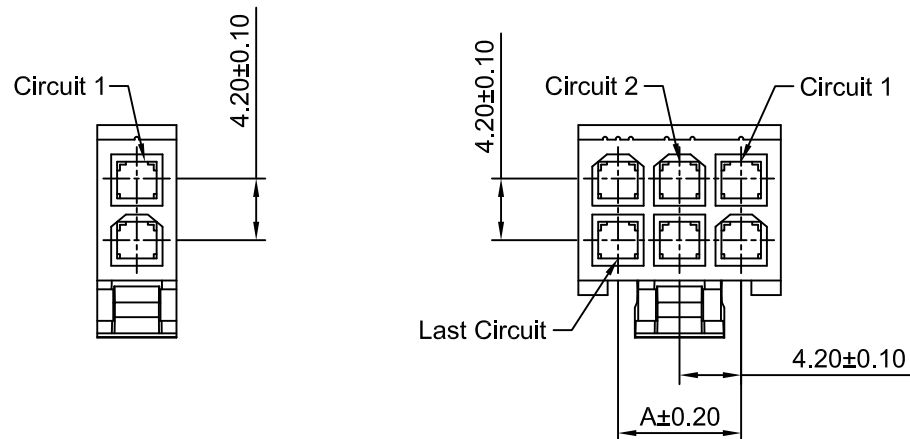

Ordering Information:

C4201HF-2xXP - *** - ** - *** - ***
1 2 3 4 5

1.Part NO.

2.Material:

(Blank);Nylon 66 UL94V-2(Natural)

46: Nylon 46,UL94V-0 (Beige)

V0:Nylon 66 UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(Blank);see section 2 material

BK:Black YL:Yellow

RD:Red BL:Blue

GN:Green


4.Packing:

(Blank): Bag

5.Logo & Marking:

(Blank): Without Mark

CJT: With Logo

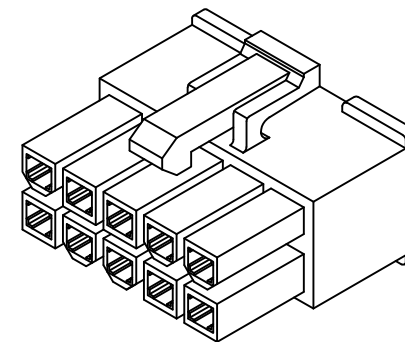

SPECIFICATIONS:

Current Rating: 13A AC,DC(Max)(Maximum current up to 13A when using the C4201F-TCA-HH series terminal)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	---	5.40	2x7P	25.20	30.60
2x2P	4.20	9.60	2x8P	29.40	34.80
2x3P	8.40	13.80	2x9P	33.60	39.00
2x4P	12.60	18.00	2x10P	37.80	43.20
2x5P	16.80	22.20	2x11P	42.00	47.40
2x6P	21.00	26.40	2x12P	46.20	51.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

A6	CHANGE THE DRAWING	2023.08.24
A5	CHANGE THE DRAWING	2022.05.16
A4	CHANGE THE DRAWING	2022.04.22
A3	CHANGE THE SIZE & INFORMATION	2019.12.09
A2	Drawing revision	2016.06.08
A1	Change tolerance	2014.07.25
REV	DESCRIPTION	DATE

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	4.20mm PITCH DUAL ROW HOUSING	
DRWN	CHK'D	APPR		
Halsen Li	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			C4201HF-2xXP	
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°			REV A6	