




Connectors > Terminal Blocks & Strips > Modular Terminal Blocks

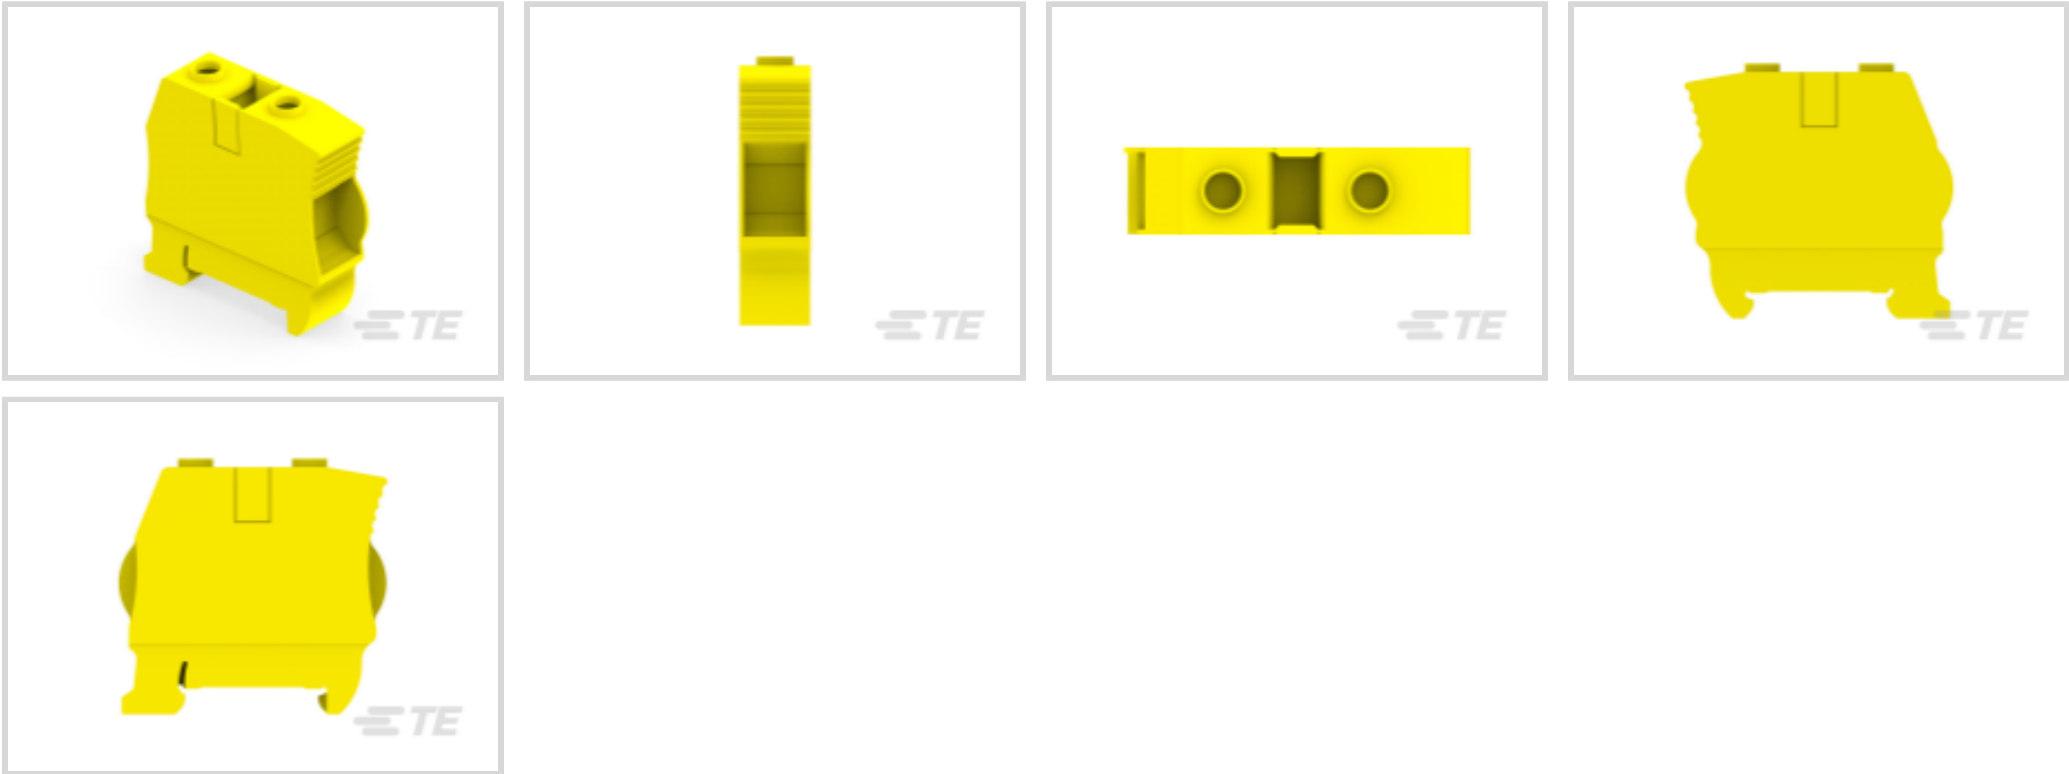

Block Function: **Feed-Through**
Modular Terminal Block Product Type: **Screw Clamp Terminal Block**
Primary Product Color: **Yellow**
Product Spacing: **16 mm [.63 in]**
Number of Positions: **2**

Features

Product Type Features

Modular Terminal Block Product Type	Screw Clamp Terminal Block
-------------------------------------	----------------------------

Configuration Features

Gauge Type	Dia.11
Number of Levels	1
Number of Circuits	1
Block Function	Feed-Through
Number of Positions	2

Electrical Characteristics

Impulse Withstanding Voltage Rating (IEC)	8000 V
Current Rating (CSA)	140 A
Power Loss	4.8 W
Short-Time Withstanding Current Rating @ 1s	6000 A
Voltage Rating (IEC)	1000 V
Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	1000 V



Voltage Rating (CSA)	1000 V
Dielectric Withstanding Voltage (Max)	2200 V
Current Rating (UL)	140 A
Current Rating (IEC)	150 A

Body Features

Product Weight	52.9 g[2.083 oz]
Primary Product Color	Yellow

Mechanical Attachment

DIN Rail Mounting Type	TH35-15
Connector Mounting Type	DIN Rail

Housing Features

Housing Material	Polyamide
------------------	-----------

Dimensions

Main Circuit Capacity - Twin Ferrule per Screw Clamp	18 – 4 AWG
Main Circuit Capacity - 1 Flexible Conductor per Screw Clamp	1 – 50 mm²
Main Circuit Capacity - 1 Non-Insulated Ferrule per Screw Clamp	1 – 50 mm²
Main Circuit Capacity - 1 Insulated Ferrule per Screw Clamp	18 – 0 AWG
Main Circuit Capacity - 1 Rigid Stranded Conductor per Screw Clamp	18 – 0 AWG
Wire Stripping Length	17 mm[.669 in]
Main Circuit Capacity - 2 Rigid Stranded Conductors per Screw Clamp	1 – 25 mm²
Main Circuit Capacity - 2 Flexible Conductors per Screw Clamp	1 – 25 mm²
Tool Size	6.5 mm[.256 in]
Product Depth	60.2 mm
Product Height	63.6 mm
Product Spacing	16 mm[.63 in]

Usage Conditions

Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts




TE Part # 1SNK140000R0000
MC512



TE Part # 1SNK140004R0000
MC512-YL

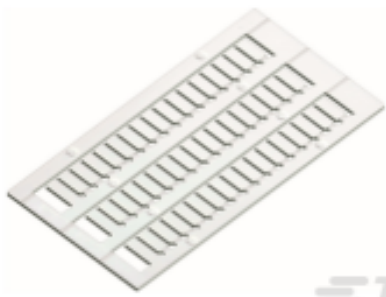

TE Part # 1SNK150000R0000
MC612

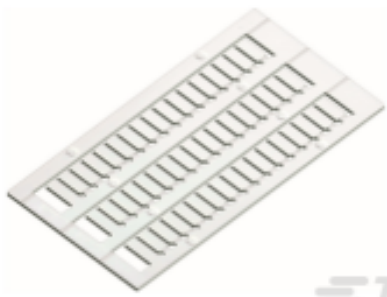

TE Part # 1SNK160000R0000
MC812



 TE Part # 1SNK900102R0000 BAZH1	 TE Part # 1SNA164800R0300 PR3.G2	 TE Part # 1SNA168500R1200 PR4	 TE Part # 1SNA168700R2200 PR5
 TE Part # 1SNA173220R0500 PR30	 TE Part # 1SNA174300R1700 PR3.Z2	 TE Part # 1SNA178529R0400 PR50	 TE Part # 1SNK149999R0000 MC512PA
 TE Part # 1SNK150004R0000 MC612-YL	 TE Part # 1SNK159999R0000 MC612PA	 TE Part # 1SNK160004R0000 MC812-YL	 TE Part # 1SNK169999R0000 MC812PA
 TE Part # 1SNK900611R0000 UMH	 TE Part # 1SNK900613R0000 PROCAP8	 TE Part # 1SNK916302R0000 JB16-2	 TE Part # 1SNK916303R0000 JB16-3

Also in the Series | ENTRELEC SNK

 Modular Terminal Blocks(320)	 Terminal Block & Strip Conducting Accessories(67)	 Terminal Block & Strip Insulating Accessories(31)
---	---	--

Customers Also Bought



TE Part #1SNK505020R0000
ZS4-BL

TE Part #1SNK508010R0000
ZS10

TE Part #1SNA231002R2500
RC510 1->10 (X10) HORIZONTAL

TE Part #1SNA400772R1300
D70/22.P

TE Part #1SNK922302R0000
JB22-2

TE Part #1SNA008288R1500
FU520

TE Part #1SNA008290R1300
FU520

TE Part #1SNA176740R1100
BJMI5D-10

TE Part #1SNA206053R0700
BJMI31.2

TE Part #1SNA179613R0100
BJM16

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNK516060R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNK516060R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNK516060R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

ENTRELEC Terminal Block - Master Catalog

ENTRELEC Terminal Block - Master Catalog

English

1SNK516060R0000

Feed-Through, Screw Clamp Terminal Block, Yellow, Product Spacing 16 mm [.63 in],
2 Position, DIN Rail, ENTRELEC SNK, Modular Terminal Blocks



[ZS50-YL](#)

English

[SNK SERIES TERMINAL BLOCKS](#)

English

[ENTRELEC Terminal Blocks Catalogue \(RUS\)](#)

[Agency Approvals](#)

[ZK-ZS_ATEX_1SND225112U1006-C-TE](#)

English