

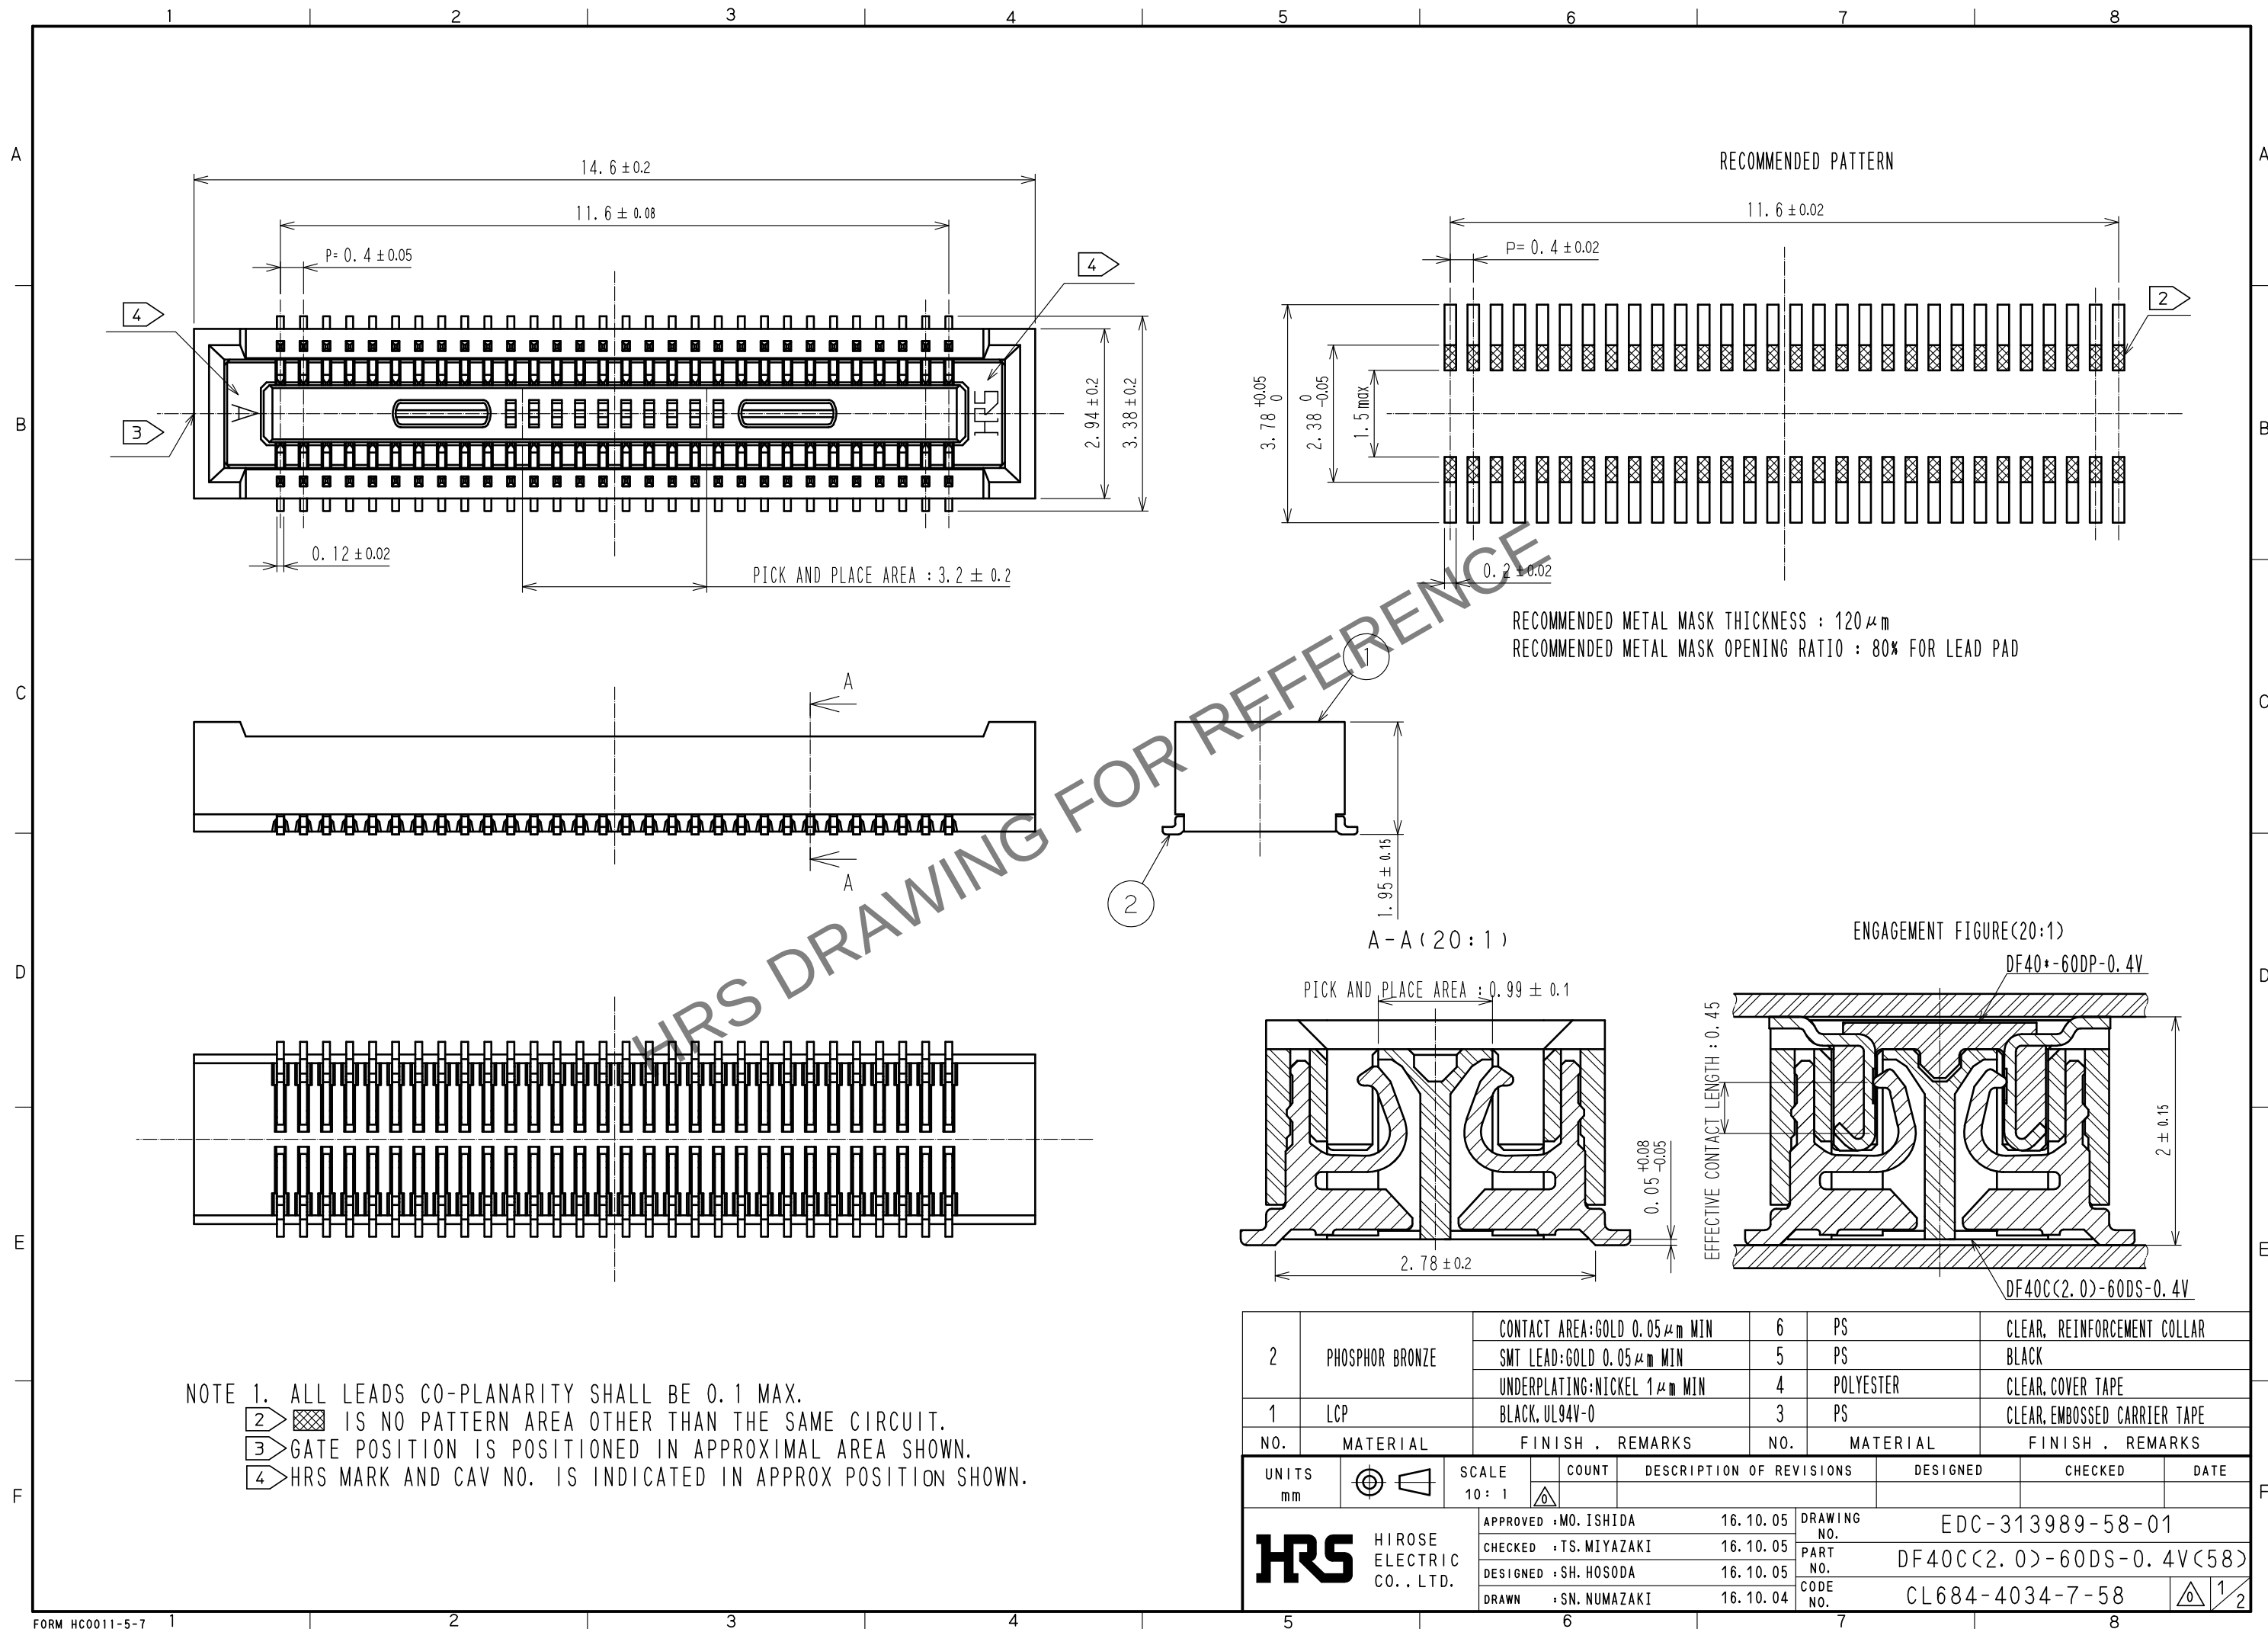
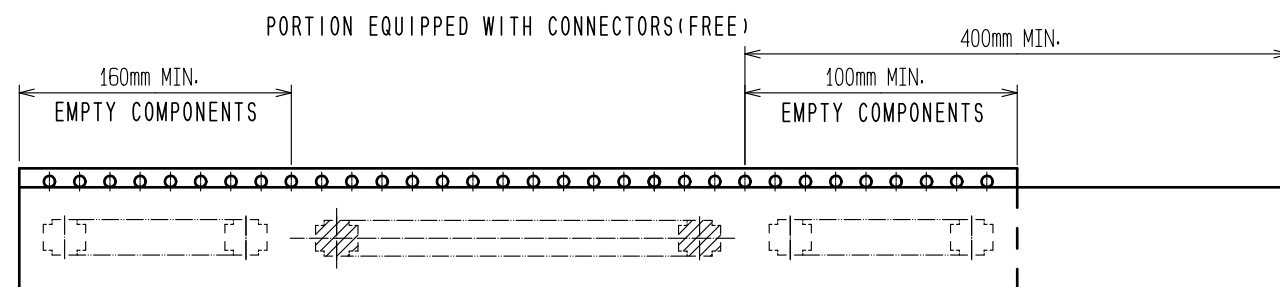


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

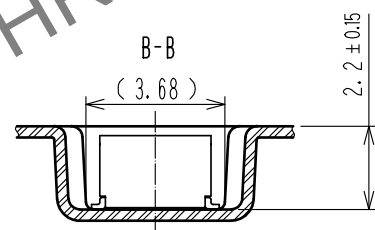

Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

SCALE (5:1)

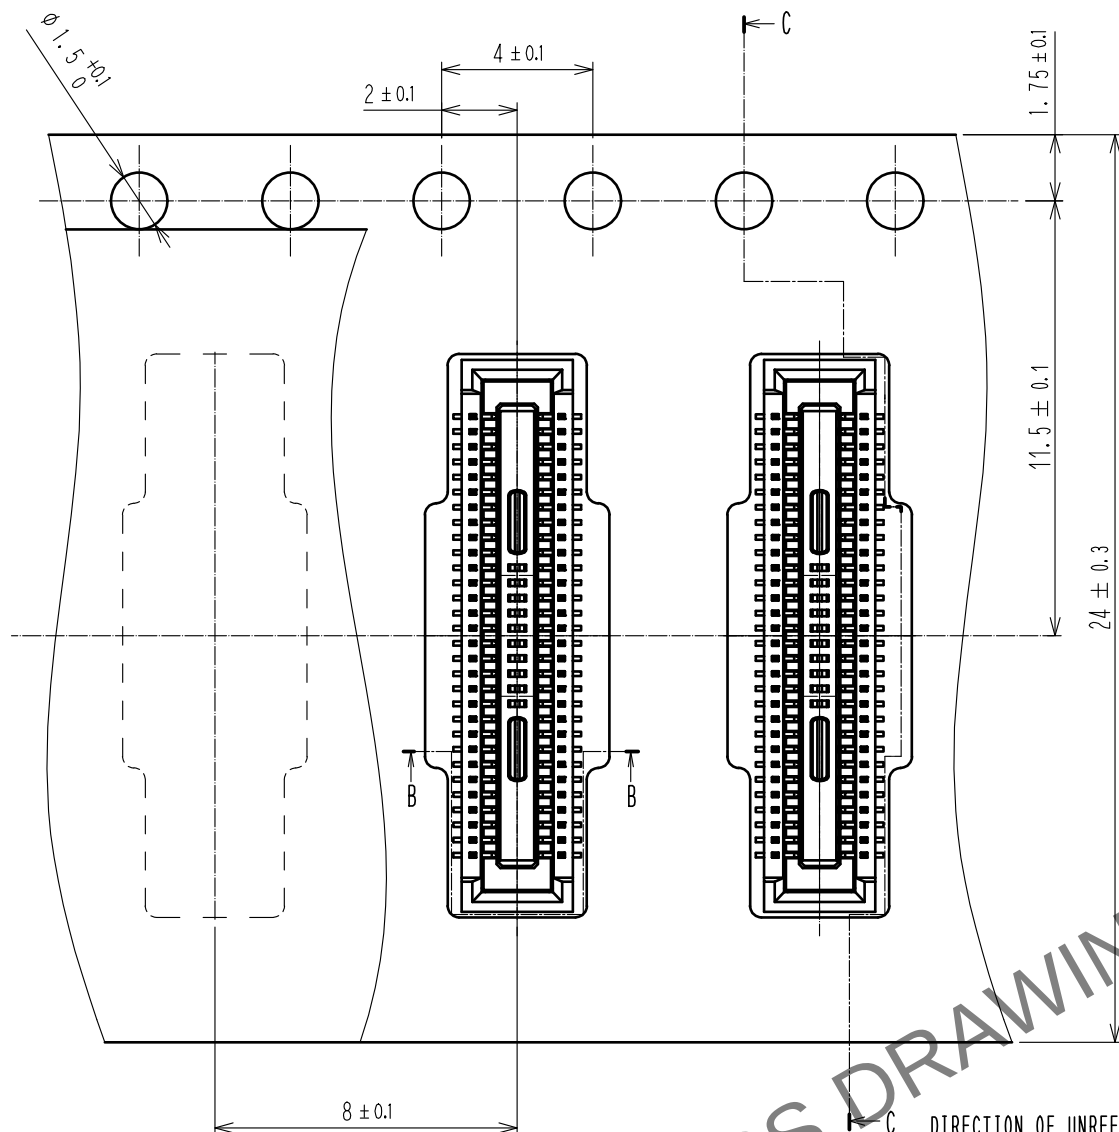


TRAILER


7 TAPING

LEADER

STYLE AND DIMENSION OF REEL (FREE SIZE)

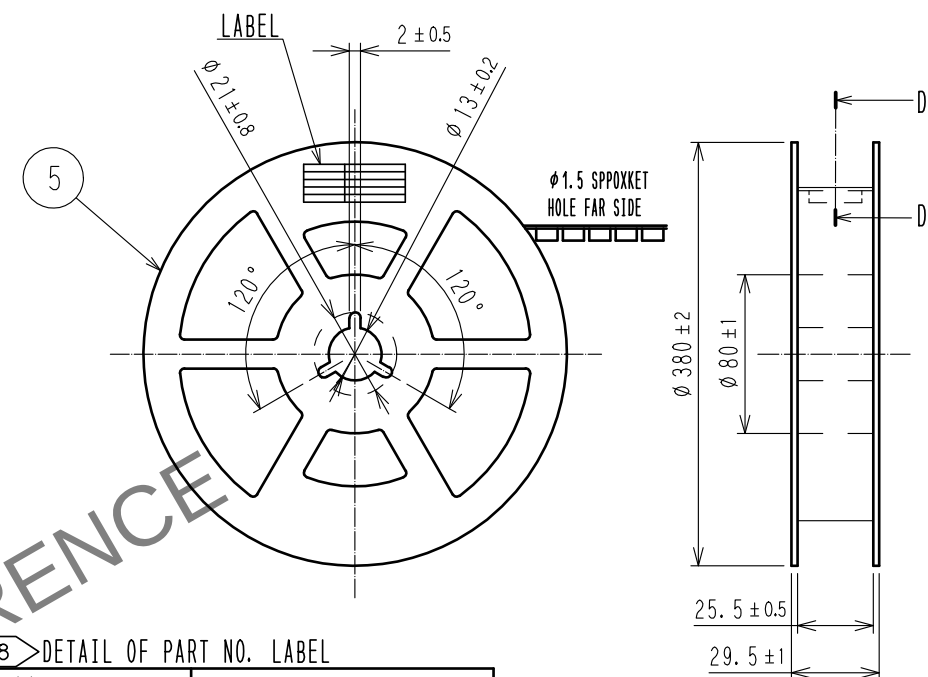

8>DETAIL OF PART NO. LABEL	
製造年月日	** ** *
製品コード	CL684-4034-7-58
製品名	DF40C(2.0)-60DS-0.4V(58)
数量	1000
納入者	ヒロセ電機(株)

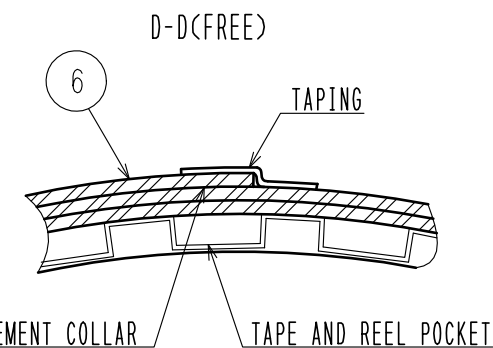

- NOTES
- PER REEL 1000 CONNECTORS.
 - THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - REFER TO JIS C 0806(PACKING OF COMPONENTS FOR AUTOMATIC HANDLING)
 - DETAIL OF PART No. LABEL IS WRITTEN IN JAPANESE.
PART NO. LABEL DESCRIBES THE FOLLOWING INFORMATION FROM TOP.
Production Date:
Product Code: CL684-4034-7-58
Part Number: DF40C(2.0)-60DS-0.4V(58)
Number of pieces: 1000 pieces
Supplier Name: Hirose Electric Co., Ltd.
 - AFTER PACKAGING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET, AND TAPE DOWN AT THE END THE COLLAR.

HRS

図番:	EDC-313989-58-01
製品名:	DF40C(2.0)-60DS-0.4V(58)
製品コード	CL684-4034-7-58

2/2