

由Autodesk教育版产品制作

由Autodesk教育版产品制作


由Autodesk教育版产品制作

由Autodesk教育版产品制作

RoHS

MAPX	MODIFICATION	DRW	DATE

- 1.材料
A.主体: LCP, 黑色, 白色, UL 94-V0;
B.端子: 铜合金, 电镀刷金;
C.外壳: 不锈钢, 镀全镍;
- 2.主要特性
A.电压等级: 20V AC;
B.电流: 3A;
C.工作温度: -40°C~85°C;
- 3.电气要求:
A.接触电阻: 40mΩ Max.(初始), 50mΩ Max。(最后);
B.电压: 100V AC 1分钟;
C.绝缘电阻: 100MΩ min。DC 500V;
- 4.机械性能:
A.插入力: 5~20N。(从1~10,000次);
B.拔出力: 8~20N。(从1~1,000次);
6~20N。(从1,001~10,000次);
C.耐久性寿命: 5,000次;

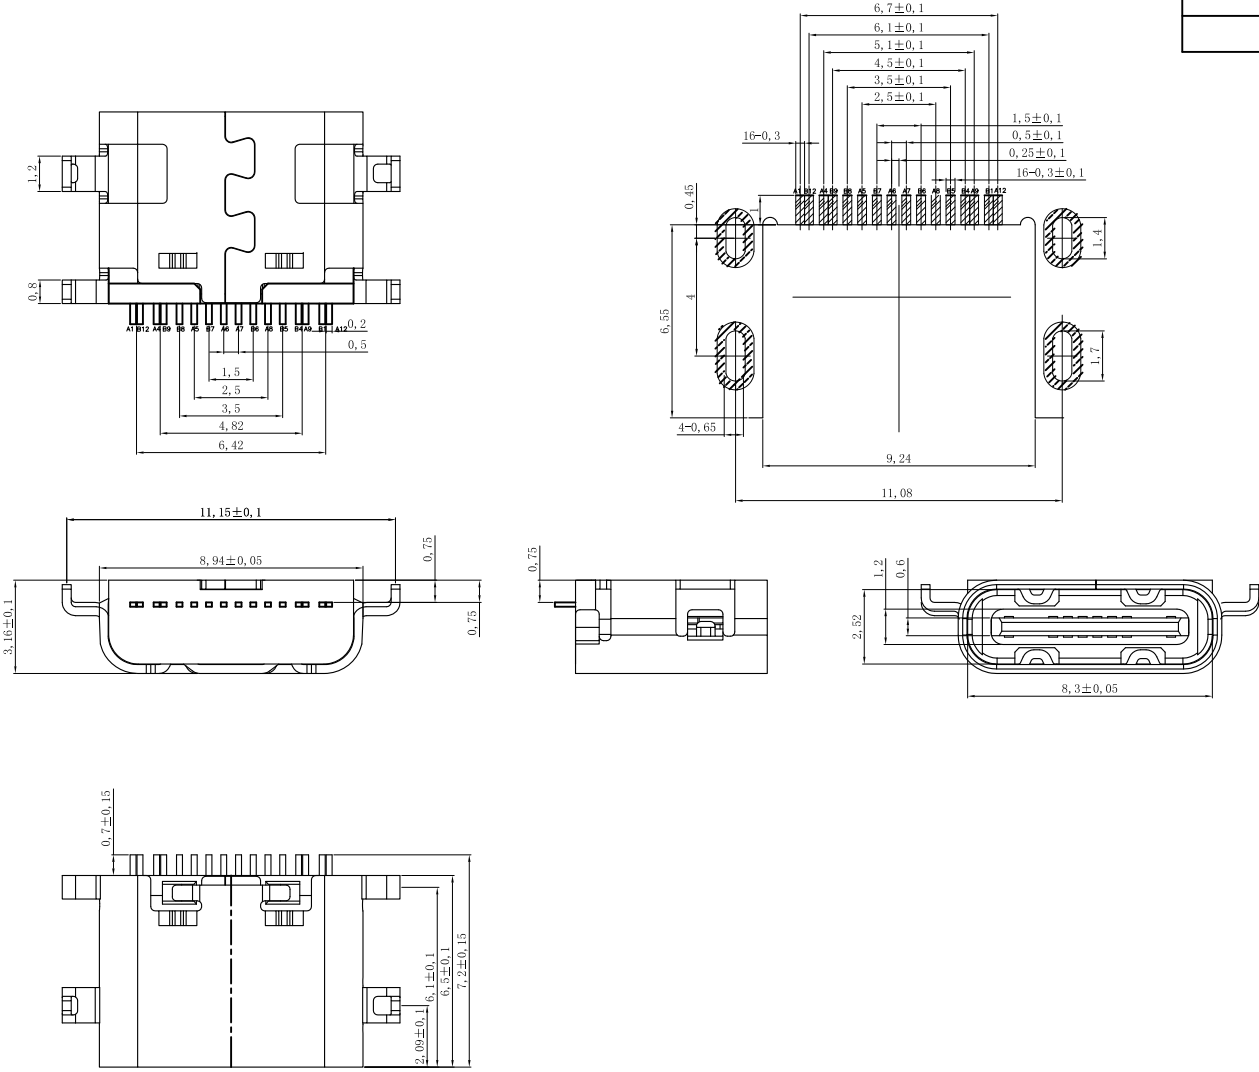

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A4	VBUS	Bus Power	B9	VBUS	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use (SBU)	B5	CC2	Configuraation Channel
A9	VBUS	Bus Power	B4	VBUS	Bus Power
A12	GND	Ground return	B1	GND	Ground return

产品图
PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERWISE

X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

单位 UNITS	MM	制图 DRAWING	XZQ	制图料号 PRODUCT PART NO.	918-418K2024S40003
比例 SCALE	1:1	审核 CHKD	郭志富	产品名称 PRODUCT NO.	TYPE-C3.1 16PF SMT沉板0.8母座 不锈钢301单排短体6.5L黄铜3A
日期 DATE	2016-09-09	核准 APPD	黄国荣	角法 VIEW	版本 VER
					A0