

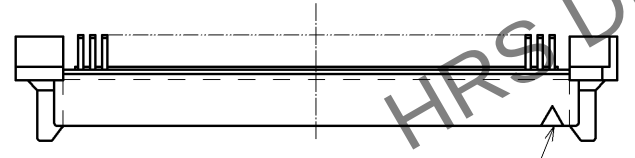
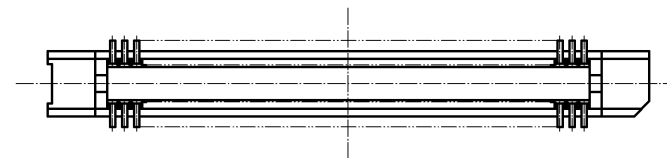
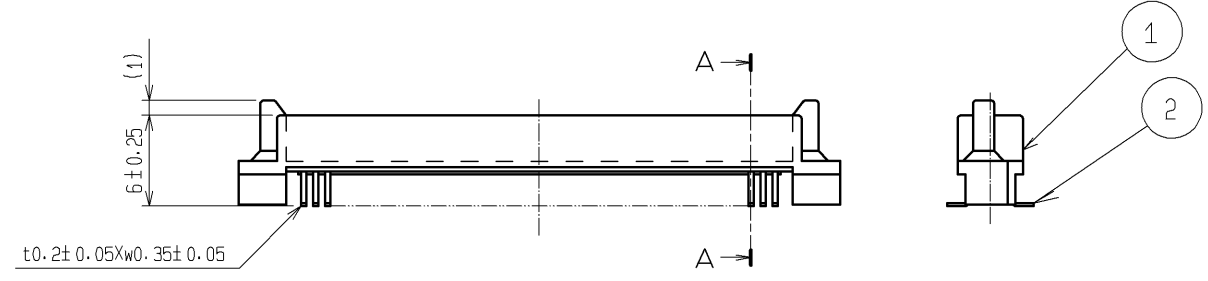


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

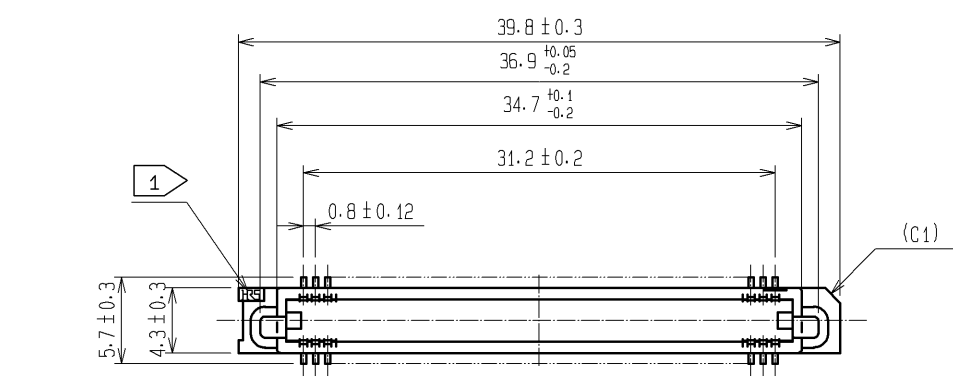


POLARIZATION MARK


RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS t=0.15)

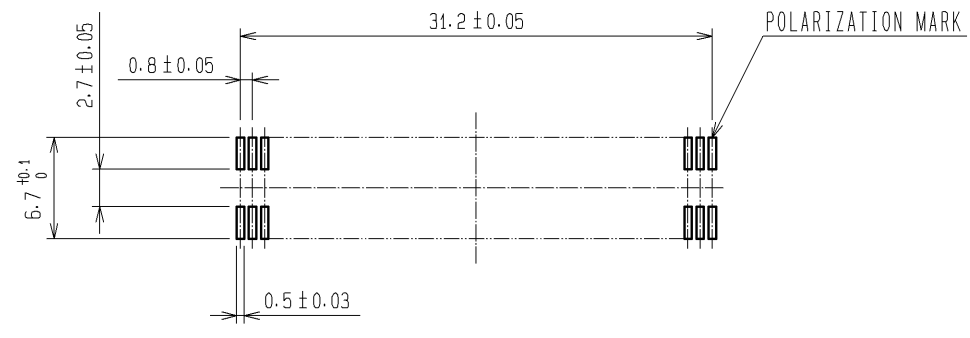

A-A (10:1)

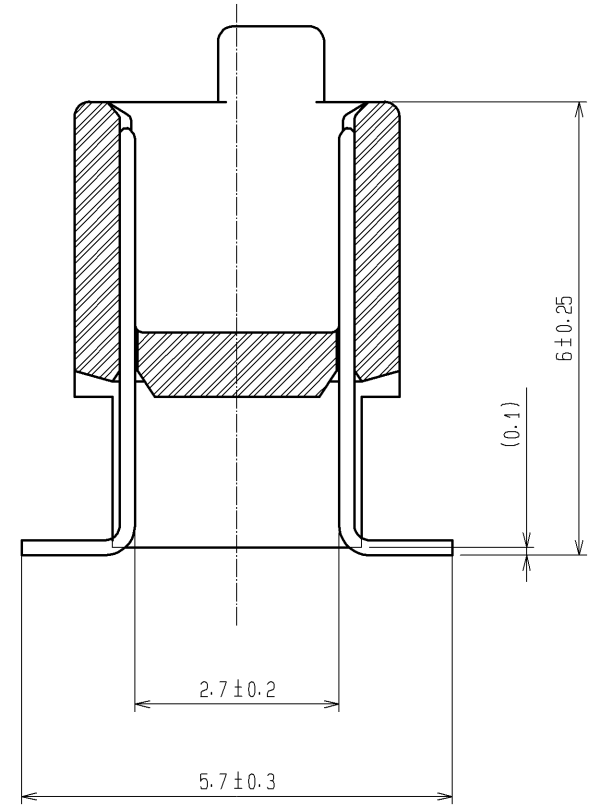

- NOTES
1. HRS MARK SHOULD BE OPTIONAL.
 2. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 3. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
 4. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1		PPS		LIGHT BROWN		UL94V-0		2		PHOSPHOR BRONZE		CONTACT AREA:GOLD 0.1μm min.					
												LEAD AREA:TIN-PLATING 1μm min.					
												UNDER PLATING:NICKEL 1μm min.					
NO.		MATERIAL		FINISH		REMARKS		NO.		MATERIAL		FINISH		REMARKS			
UNITS mm				SCALE 2 : 1				COUNT		DESCRIPTION OF REVISIONS		DESIGNED		CHECKED		DATE	
 HIROSE ELECTRIC CO., LTD.		APPROVED		: HS. OKAWA		05.11.01		DRAWING NO.		EDC3-071331-25							
		CHECED		: HS. OZAWA		05.11.01		PART NO.		FX6A-80P-0.8SV2(71)							
		DESIGNED		: TK. YANAGISAWA		05.11.01		CODE NO.		CL576-0247-3-71							
		DRAWN		: TK. YANAGISAWA		05.11.01				 1/1							
5				6				7				8					