




Connectors > PCB Connectors > PCB Headers & Receptacles

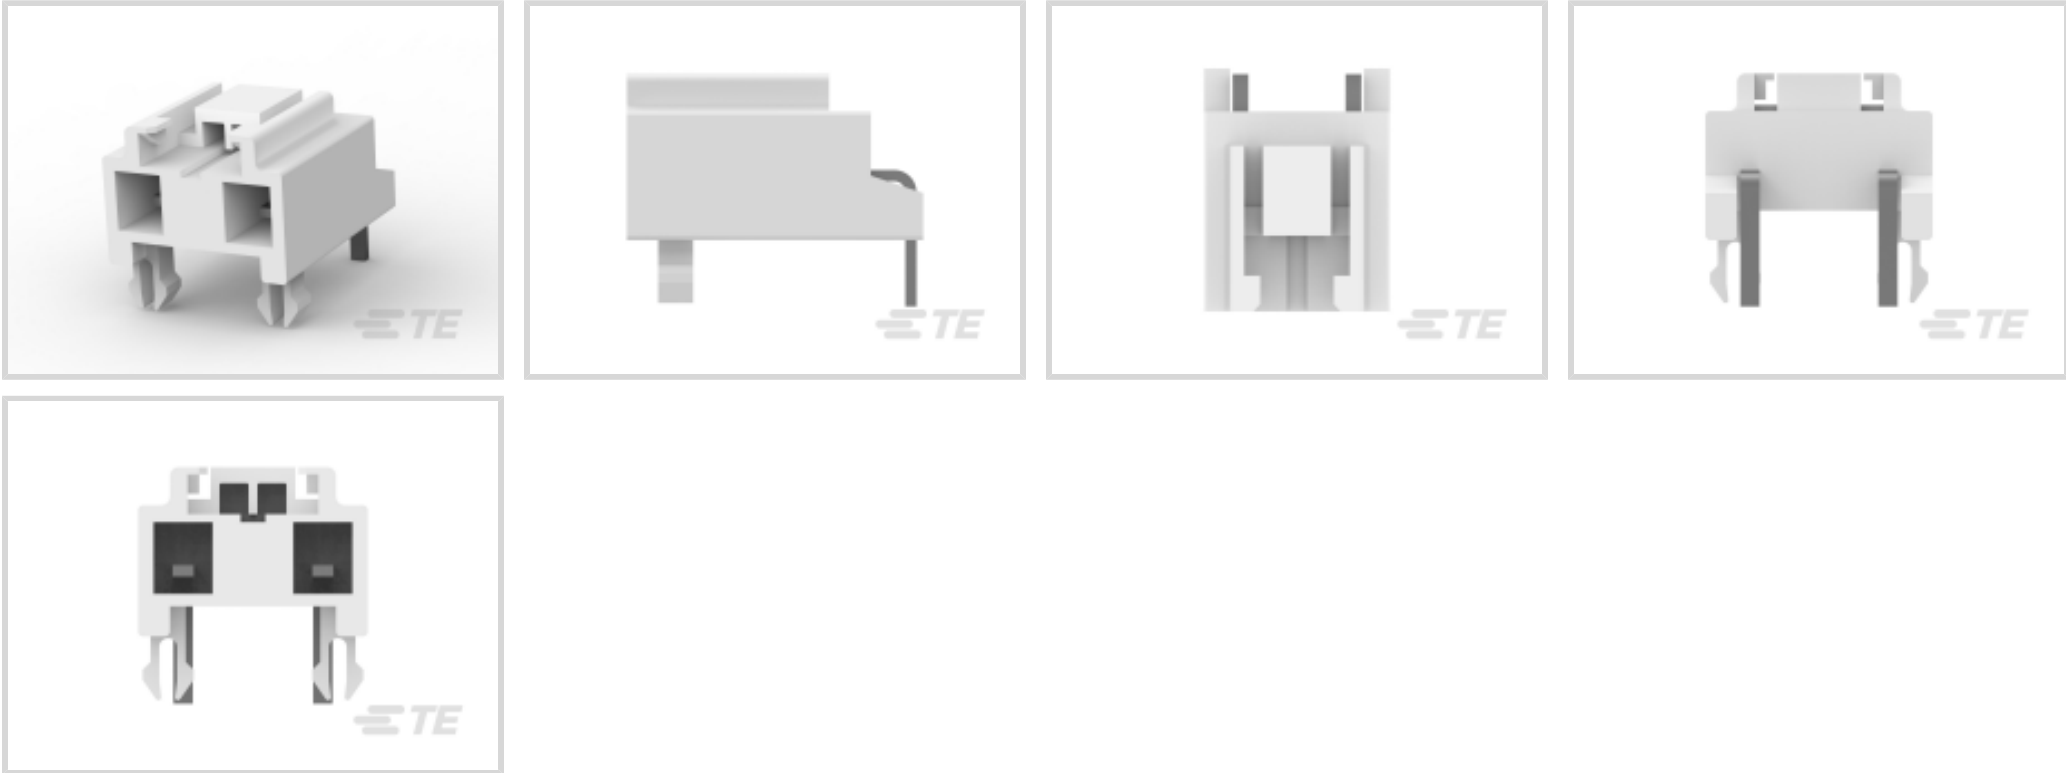

PCB Connector Assembly Type: **PCB Mount Header**

Connector System: **Wire-to-Board**

Number of Positions: **3**

Number of Rows: **1**

Centerline (Pitch): **7.92 mm [.311 in]**

Features

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Assembly Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Power Positions	2
Number of Columns	3
Number of Loaded Positions	2
Connector Contact Load Condition	Selectively Loaded
Number of Positions	3
Number of Rows	1
PCB Mount Orientation	Right Angle



Electrical Characteristics

Operating Voltage	300 VAC
-------------------	---------

Body Features

Primary Product Color	Natural
-----------------------	---------

Contact Features

Contact Size	1.2mm
PCB Contact Termination Area Plating Material Thickness	1 µm[39.37 µin]
Contact Layout	Inline
Mating Tab Width	1.2 mm[.047 in]
Mating Tab Thickness	.64 mm[.025 in]
Contact Underplating Material Thickness	.8 – 1.8 µm[31.49 – 70.86 µin]
Contact Mating Area Plating Material Thickness	1 µm[39.37 µin]
PCB Contact Termination Area Plating Material Finish	Bright
Contact Shape & Form	Rectangular
Contact Mating Area Plating Material Finish	Bright
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Brass
Contact Mating Area Plating Material	Tin
Contact Type	Tab
Contact Current Rating (Max)	12 A

Termination Features

Rectangular Termination Post & Tail Thickness	.64 mm[.025 in]
Rectangular Termination Post & Tail Width	1.1 mm[.043 in]
Termination Post & Tail Length	3.8 mm[.15 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Mating Retention	With
Panel Mount Feature	Without
PCB Mount Retention Type	Boardlock
Mating Retention Type	Locking Latch
Connector Mounting Type	Board Mount



Mating Alignment	Without
PCB Mount Alignment	Without
PCB Mount Retention	With

Housing Features

Mating Entry Location	Side
Housing Material	Nylon 6/6 GF
Centerline (Pitch)	7.92 mm[.311 in]

Dimensions

Connector Length	13.02 mm[.513 in]
Connector Height	9.55 mm[.376 in]
Connector Width	14 mm[.551 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	250
Packaging Method	Bag

Other

Position Locations Omitted	2
Number of Blocked Positions	1

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold



EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JUNE 2024 (241)
Candidate List Declared Against: JUNE 2024 (241)
Does not contain REACH SVHC

Halogen Content

Not Low Halogen - contains Br or Cl > 900 ppm.


Solder Process Capability

Wave solder capable to 265°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

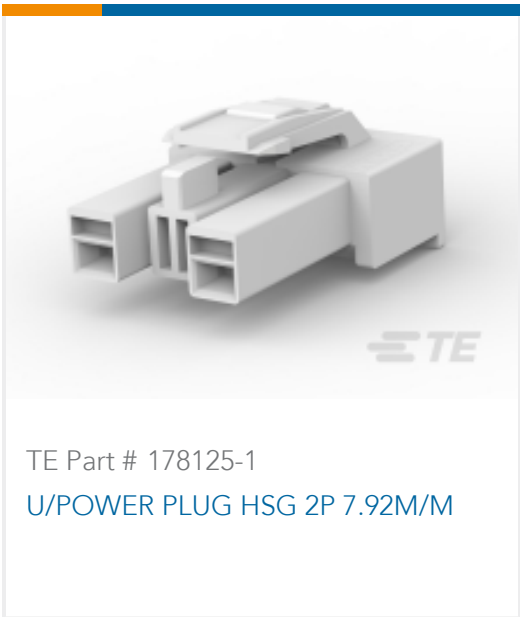


TE Part # 178125-1
U/POWER PLUG HSG 2P 7.92M/M

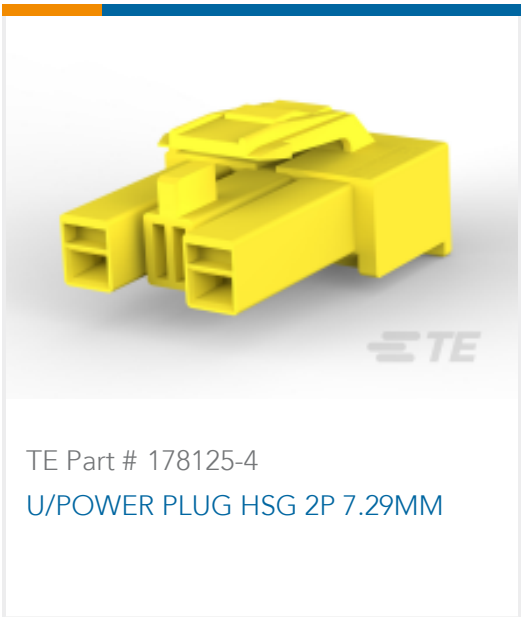

TE Part # 178125-4
U/POWER PLUG HSG 2P 7.29MM



TE Part # 178125-2
UNIVERSAL POWER PLUG HSG 2P

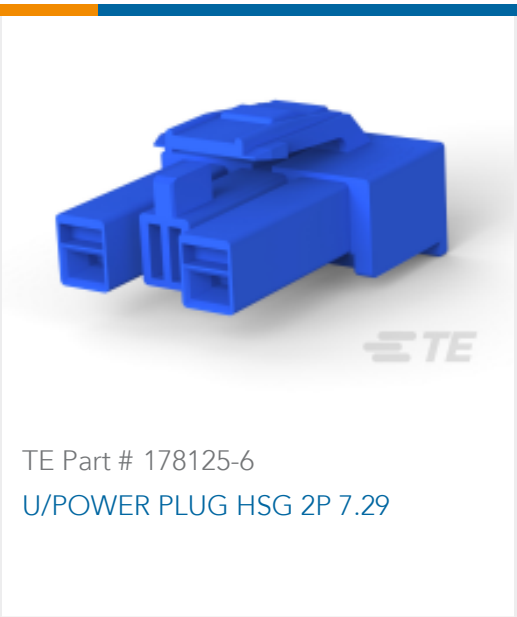

TE Part # 178125-6
U/POWER PLUG HSG 2P 7.29



TE Part # 178125-9
UNIVERSAL POWER PLUG HSG 2P


Also in the Series | AMP Universal Power



Connector Contacts(22)



Insertion & Extraction Tools(1)

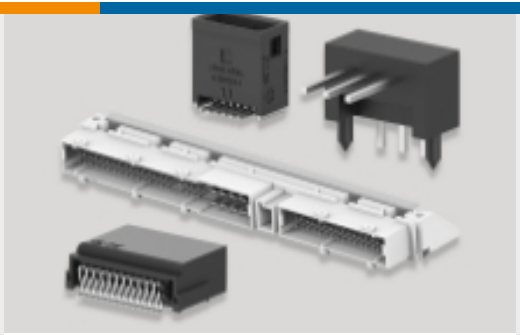


PCB Headers & Receptacles(51)




Rectangular Power Connectors(112)

Customers Also Bought

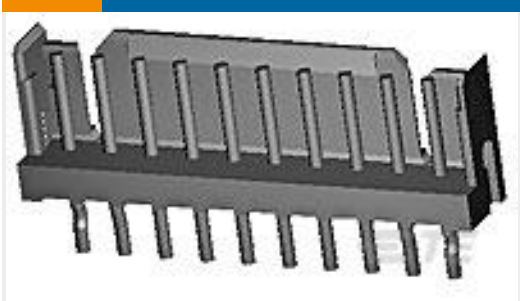

TE Part #292161-4
CT P/HDR ASSY V 4P W/KINK NAT

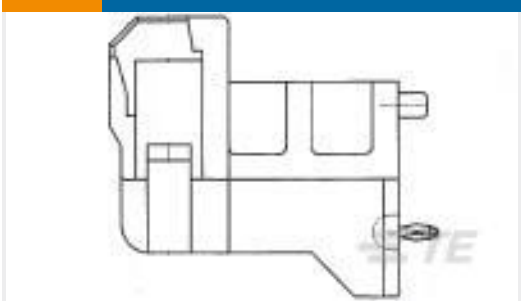


TE Part #6318372-1
SMARTEC CONN. H HDR ASSY




TE Part #917731-1
2.5 S.D.L P.HDR ASY 11P H/PRO.




TE Part #316224-1
2.5 S.D.L HI-PRO V 5P ON/TAPE

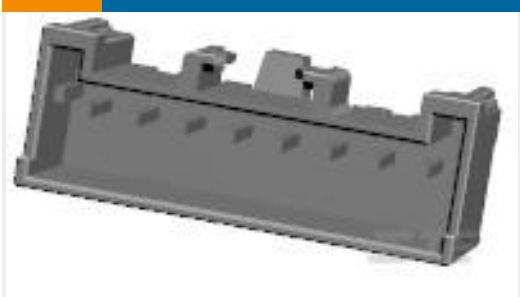

TE Part #917900-1
2.5 S.D.L STD V 8P HDR ON/TAPE

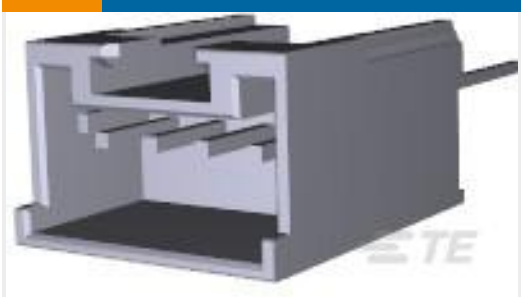


TE Part #316223-1
2.5 S.D.L HI-PRO V 4P ON/TAPE

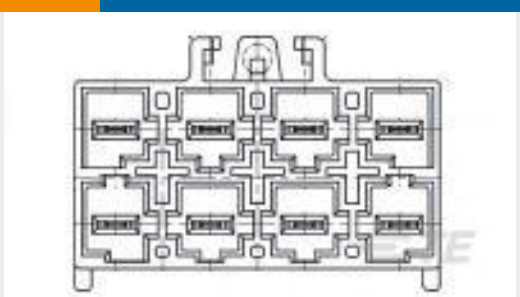

TE Part #1827197-1
AMP PDL 6.5MM PITCH 8P ASS'Y



TE Part #917896-1
2.5 S.D L STD V 4P HDR ON/TAPE

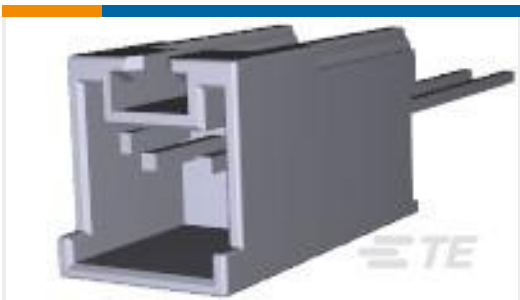

TE Part #316222-1
2.5 S.D.L HI-PRO V 3P ON/TAPE



TE Part #172040-1
MIC CAP 5P H

Documents

Product Drawings

UNIV. POWER HDR H ASSY 2P NAT.

Japanese

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-178496-1_F.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_2-178496-1_F.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-178496-1_F.3d_stp.zip](#)

English

[3D PDF](#)

English

Customer View Model

[ENG_CVM_2-178496-1_C.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_2-178496-1_C.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_2-178496-1_C.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Crimping of Universal Power Contact](#)

English

[Product Specification](#)

Japanese

[AMP Universal Power Connector](#)

Japanese

[Power Cord Connector](#)

English

[Product Specification](#)

English

Instruction Sheets

[AMP UNIVERSAL POWER CONNECTOR SERIES](#)

English

[Instruction Sheet \(non U.S.\)](#)

English

Agency Approvals

[UL Report](#)

English