



RoHS

MAPX





MODIFICATION

DRW

DATE

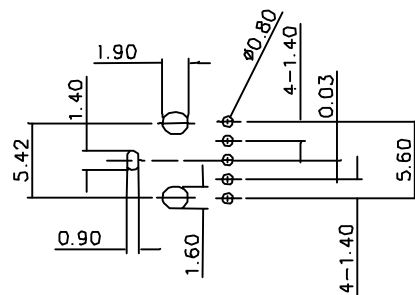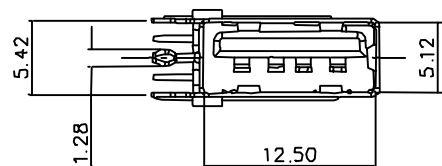

RECOMMENDED PCB LAYOUT

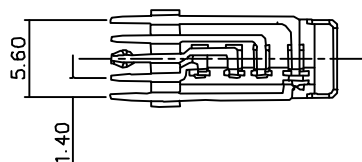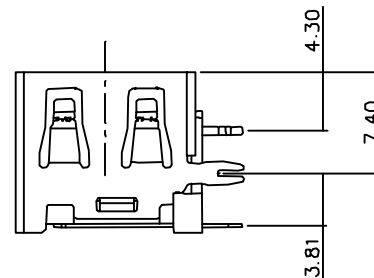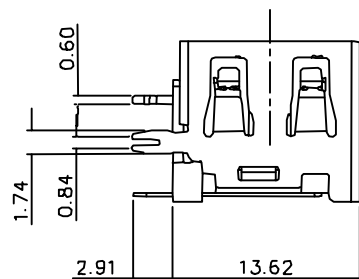

NOTE

1.MATERIAL

HOUSING: THERMOPLASTIC
SHELL: SPCC OR COPPER ALLOY
CONTACT: COPPER ALLOY

2.ELECTRICAL PERFORMANCE:

- 2.1 CURRENT: 2A MIN
2.2 CONTACT RESISTANCE: 30mOHMS MAX.
2.3 DIELECTRIC STRENGTH
UNMATED: 500V AC RMS
2.4 INSULATION RESISTANCE: 100MOHMS MIN

3.MECHANICAL PERFORMANCE:

- 3.1 INSERTION FORCE: 35N MAX.
3.2 WITHDRAWAL FORCE: 4N MIN
35N MAX.
3.3 TEMPERATURE RANGE: -25°C TO 85°C

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X.	±5°
.X	±0.25	.X	±2°
.XX	±0.20	.XX	±1°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	906-862A2029D102WD
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF11.8侧插外鱼叉内0型脚无边铜壳LCP黑胶5PIN
日期 DATE	2021-04-12	核准 APPD	黄国荣	角法 VIEW	
		版本 VER		版本 VER	A0