




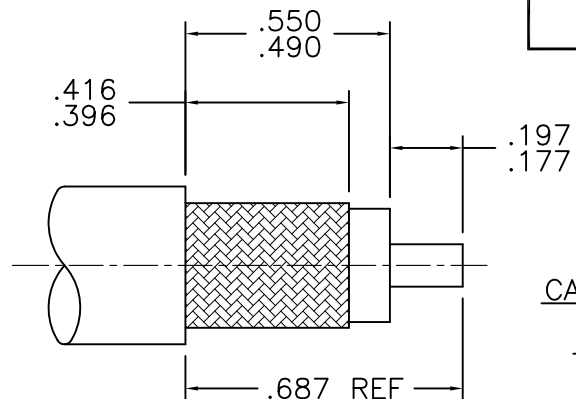

1119018A72E-000

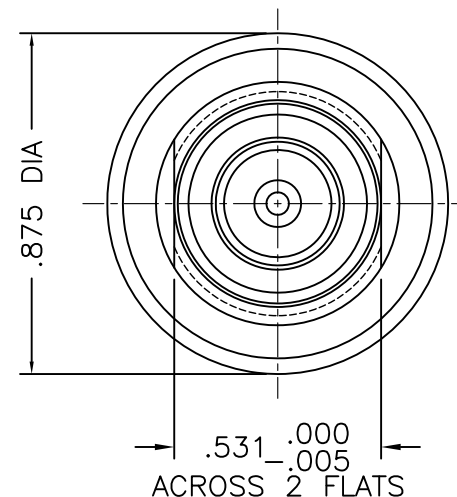

CABLE TRIMMING
DIMENSIONS

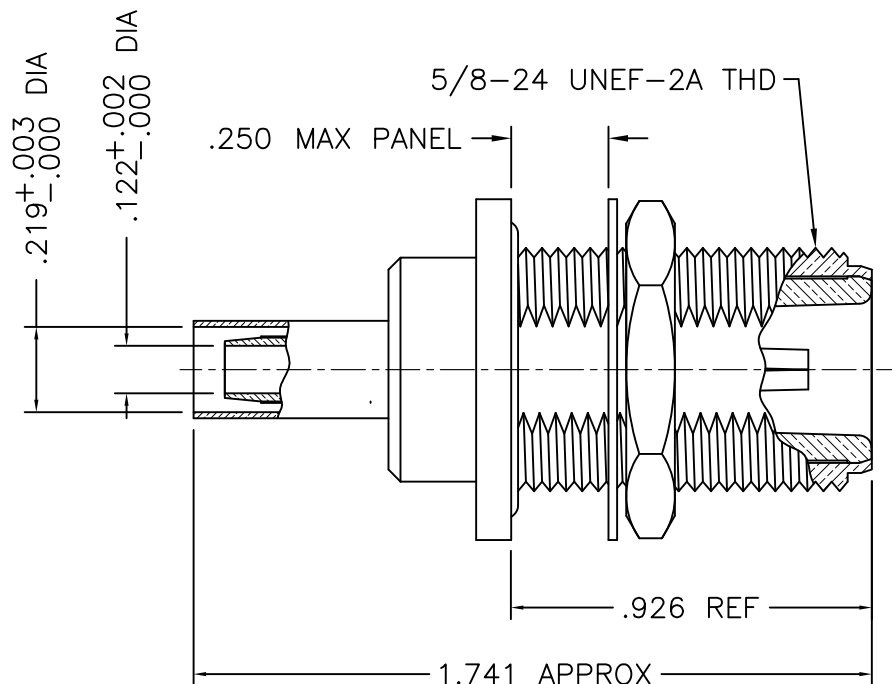

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: BODY & HEX NUT- BRASS PER ASTM B16
LOCKWASHER- SPRING STEEL
CONTACT- PHOSPHOR BRONZE PER QQ-B-750
BUSHING- BRASS PER ASTM B16.
GASKET- SILICONE RUBBER PER ZZ-R-765
INSULATOR- TEFLON PER ASTM D1710
CRIMP SLEEVE- D.H.P. COPPER CDA ALLOY 122
3. FINISHES: CONTACT- GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS- SILVER PLATE PER QQ-S-365

M39012/03-0503

C	REVISED	5/9/13
B	REDRAWN	5/13/97
ALT.	REVISIONS	DATE

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915

TITLE: 'N' (F) SHORT CRIMP BULKHEAD MOUNT
JACK FOR RG-142/U CABLE

Drawn by RWP 11/26/96	Scale 2/1	Ckd. by	FILE NAME: 1119018A72E-000T
-----------------------------	--------------	---------	--------------------------------

CODE IDENT.-00795

1119018A72E-000

**TOLERANCES
UNLESS OTHERWISE
SPECIFIED:**

3 PLACES = ±.005
2 PLACES = ±.01
ANGLES = ±1/2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG. CORP. AND SHALL NOT BE REPRODUCED, OR COPIED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.