

CONFIDENTIAL

※管理者以外のコピー及び配布を禁ずる






注記

- 一般公差
 < 10 : ±0.3
 10 ≤ < 30 : ±0.4
 30 ≤ : ±0.5
 ANGULAR : ±5°
- 材質：銅合金
- めっき仕様：すずめっき
- 圧着規格
 弊社圧着仕様書に準拠すること。
 圧着仕様書：AS-560205-001
- ELV及びRoHS適合品


NOTES:

- GENERAL TOLERANCES
 < 10 : ±0.3
 10 ≤ < 30 : ±0.4
 30 ≤ : ±0.5
 ANGULAR : ±5°
- MATERIAL : COPPER ALLOY
- PLATING : Tin PLATING
- CRIMP STANDARD
 IT IS BASED ON MOLEX CRIMP STANDARD.
 CRIMP SPECIFICATION : AS-560205-001
- ELV & RoHS COMPLIANT

(2:1)

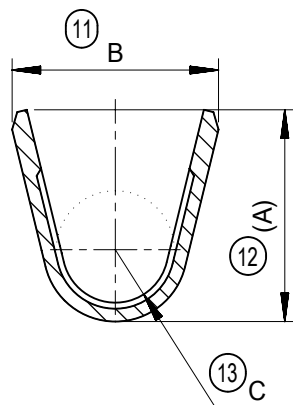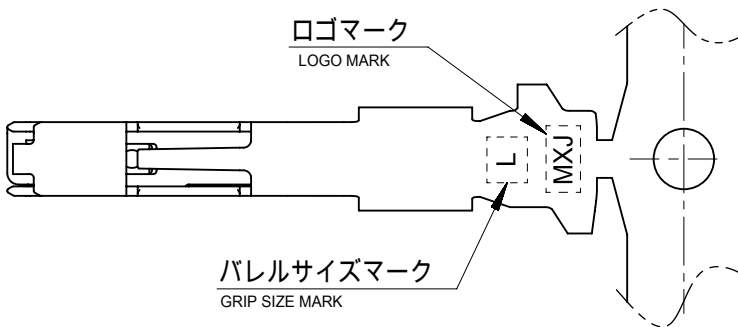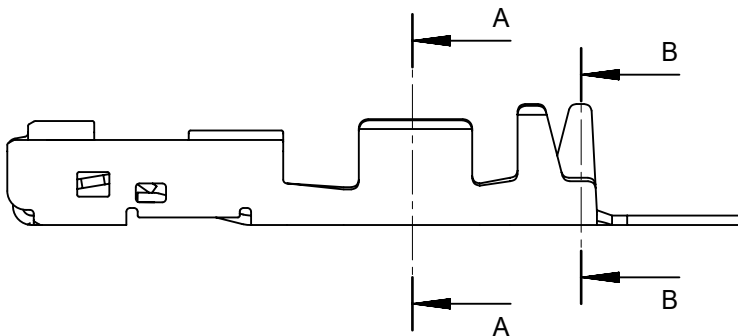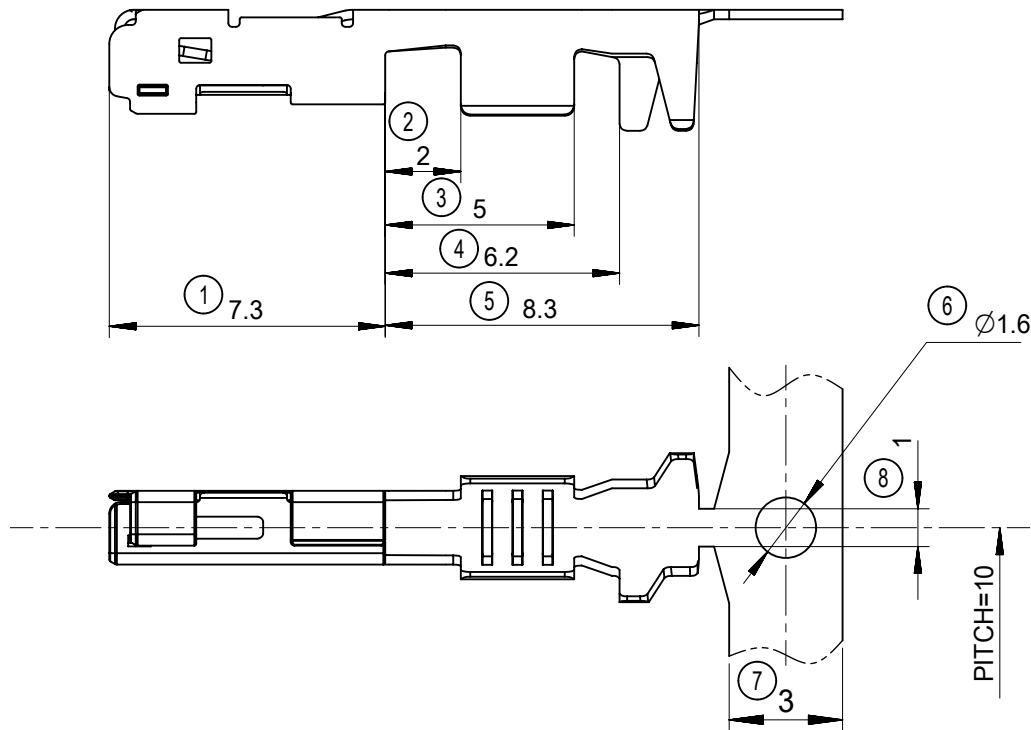


SECTION A-A
SCALE 10:1

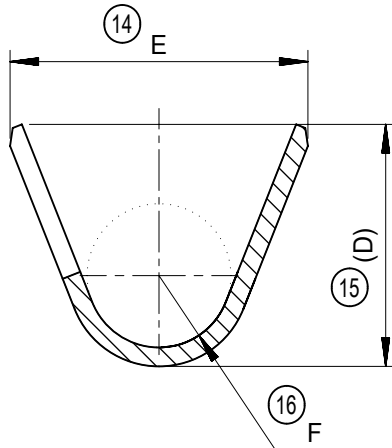


SECTION B-B
SCALE 10:1

製品取り出し方向
DIRECTION OF PRODUCT TAKING OUT

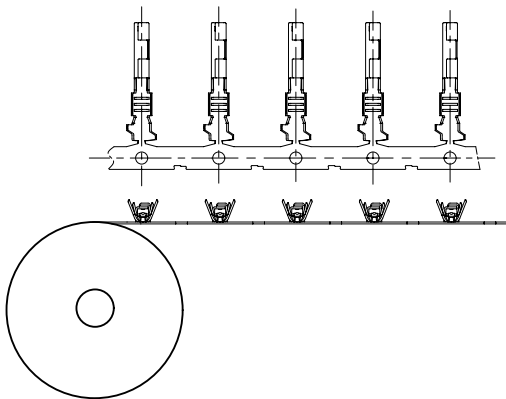

製品番号 PART NO.	バレル サイズ GRIP SIZE	適応電線 APPLICABLE WIRE		寸法 / DIMENSION					
				A	B	C	D	E	F
560205-0102	S	CIVUS , AVSS , AVSSH AESSX , IVSSH , FLRYW-B	0.5 (f)	(2.2)	2.4	R0.5	(2.45)	2.94	R0.7
560205-0103	M	CIVUS AVSS	0.75 , 1.25 0.85 , 1.25	(2.8)	2.73	R0.7	(2.73)	3.46	R0.9
560205-0101	L	AVSSH , AESSX , IVSSH FLRYW-B	0.75f , 1.25f 0.75	(2.8)	2.73	R0.7	(3.2)	3.94	R0.95

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																
 = 0	DIMENSION UNITS		SCALE		CURRENT REV DESC:												
	mm		5:1														
 = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 603294 DRWN: GABE 2018/07/03 CHK'D: TIIDA01 2018/08/23 APPR: TOSADA 2018/08/23					CTX-J 100 RECEPTACLE TERMINAL SEALED							
 = 0																	
 = 0	ANGULAR TOL									PRODUCT CUSTOMER DRAWING							
 = 0	4 PLACES																
 = 0	3 PLACES																
 = 0	2 PLACES																
 = 0	1 PLACE																
 = 0	0 PLACES				INITIAL REVISION: DRWN: TIIDA01 2014/06/04 APPR: MAYAMAMOTO 2015/11/09					DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
 = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER		
 = 0							A3-SIZE		560205		SEE TABLE		GENERAL MARKET		1 OF 1		