




SPC
TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION,
WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED
WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC
TECHNOLOGY.

SPC-F005.DWG

REVISIONS			DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			SAD	01-08-10	Jagan	05-08-10		17-08-10



Specifications:

Electrical:

Contact rating : 15A at 125 VAC, 10A at 250VAC
Contact resistance : 30 Milliohms maximum
Insulation resistance : 1000 Megohms minimum at 500 VDC
Dielectric strength : 1000 VRMS

Mechanical:



Life : 10,000 Cycles

Environmental:

Operating Temperature : -30°C to +85°C

Material:

Housing : Nylon 6/6, UL94V-0, Black
Actuator : Polycarbonate, Green
Bushing : Brass, Nickel plated
Support : Brass, Tin plated
Contactterminals : Copper Alloy, Silver Plated

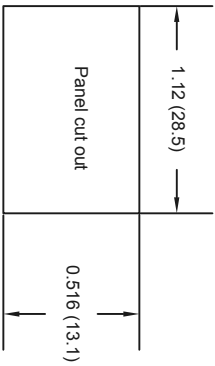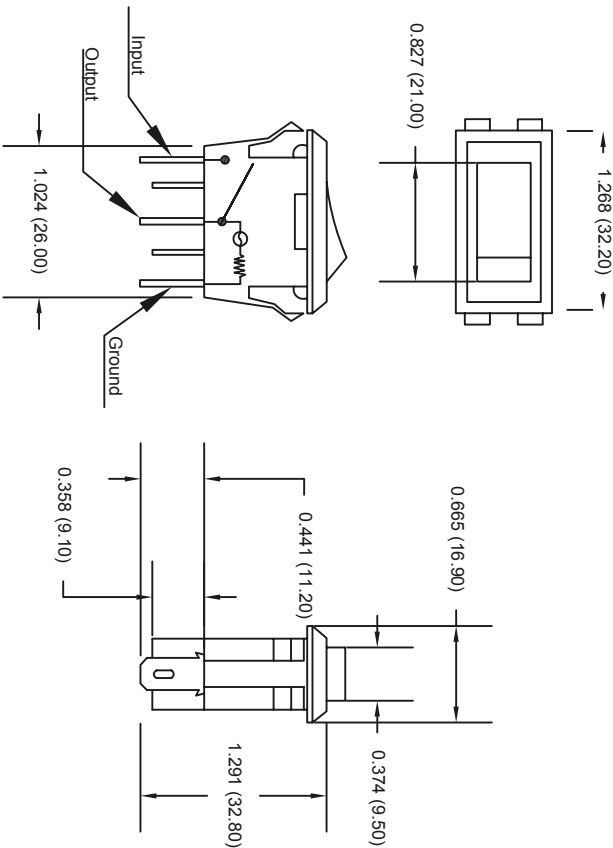

Dimensions : Inces (mm)

Part Number Table

Description	Part Number
Lighted Rocker Switch - Green - SPST - ON-OFF	SPC21178

DISCLAIMER:

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED
HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE
BELIEVE TO BE ACCURATE AND RELIABLE. SINCE
CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE
USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT
FOR THE INTENDED USE AND ASSUME ALL RISK AND
LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE
SPECIFIED,
DIMENSIONS
ARE
FOR REFERENCE
PURPOSES ONLY.

DRAWN BY:	DATE:	DRAWING TITLE:				
SID	01-08-10	Lighted Rocker Switch – Green – SPST – ON-OFF				
CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE		REV
Jagan	05-08-10	XXX	XXX	34C4462		A
APPROVED BY:	DATE:	SCALE: NTS		U.O.M.: INCHES [mm]		SHEET: 1 OF 1
XXX	17-08-10					